
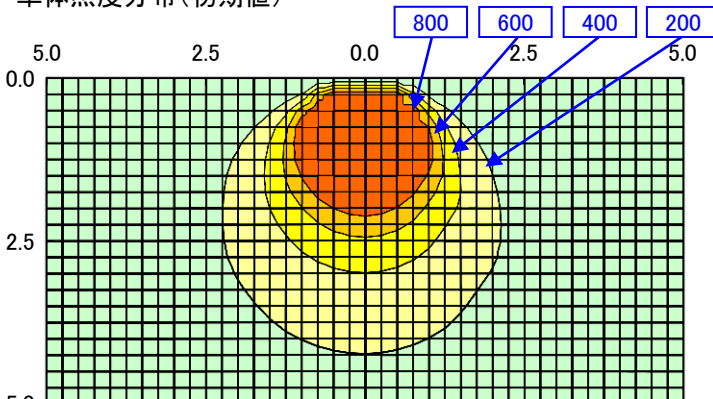
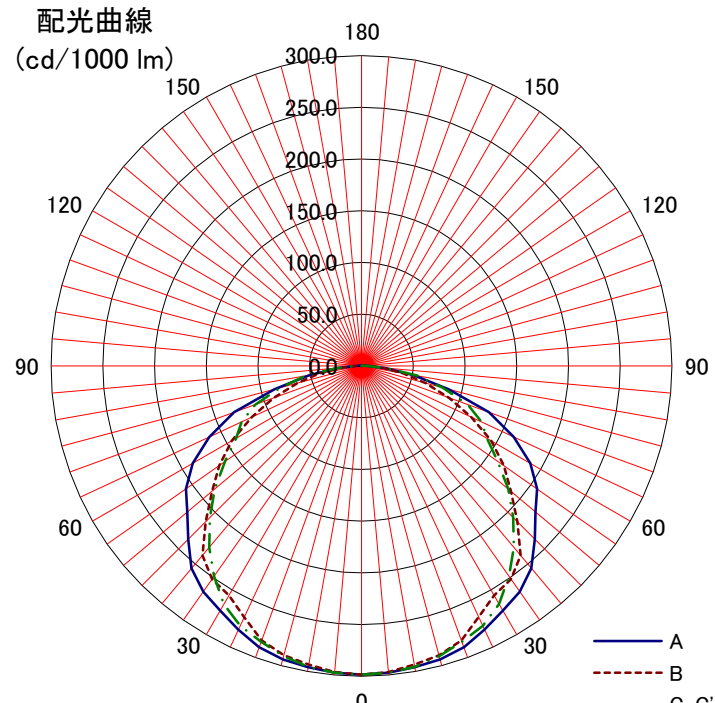


日立照明器具 照明特性

名称: 高天井用LED器具	天井 反射率	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: MTE11AWN-J14A	床	10%															0%
		室指数	固有照明率 S/H=1.0														
〈備考〉配光角(特広角)	0.6	0.55	0.43	0.35	0.53	0.42	0.35	0.30	0.41	0.34	0.30	0.40	0.34	0.29	0.28		
	0.8	0.64	0.52	0.45	0.62	0.52	0.44	0.39	0.50	0.44	0.39	0.49	0.43	0.38	0.36		
姿図 	1	0.70	0.59	0.52	0.68	0.58	0.51	0.46	0.57	0.50	0.45	0.55	0.49	0.45	0.43		
	1.25	0.76	0.66	0.59	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.61	0.56	0.52	0.49		
	1.5	0.80	0.71	0.64	0.78	0.70	0.64	0.58	0.68	0.63	0.58	0.66	0.61	0.57	0.55		
	2	0.86	0.78	0.72	0.84	0.77	0.71	0.67	0.75	0.70	0.66	0.73	0.69	0.65	0.63		
	2.5	0.89	0.83	0.77	0.87	0.81	0.76	0.72	0.79	0.75	0.71	0.77	0.74	0.70	0.68		
	3	0.91	0.86	0.81	0.90	0.85	0.80	0.76	0.82	0.78	0.75	0.80	0.77	0.74	0.71		
	4	0.94	0.90	0.86	0.93	0.89	0.85	0.82	0.86	0.83	0.80	0.84	0.82	0.79	0.76		
光源形式 —	5	0.96	0.93	0.89	0.95	0.92	0.88	0.85	0.89	0.87	0.84	0.87	0.85	0.83	0.80		
器具光束 12,000 lm	7	0.99	0.96	0.94	0.98	0.95	0.93	0.90	0.93	0.91	0.89	0.91	0.89	0.87	0.85		
	10	1.01	0.99	0.97	1.00	0.98	0.96	0.95	0.96	0.94	0.93	0.93	0.92	0.91	0.88		
器具効率 Ft= 100%		単体照度分布 (初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		A← 水平距離(m) →B															
A-A 1.38 H																	
B-B 1.32 H																	
保守率	良	0.81	配光曲線 (cd/1000 lm) 														
	中	0.79															
	否	0.75															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	298	298	298														
10	296	293	296														
20	289	282	284														
30	273	256	266														
40	255	239	229														
50	220	188	185														
60	188	145	140														
70	131	90	109														
80	51	41	55														
90	6	6	5														
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	