
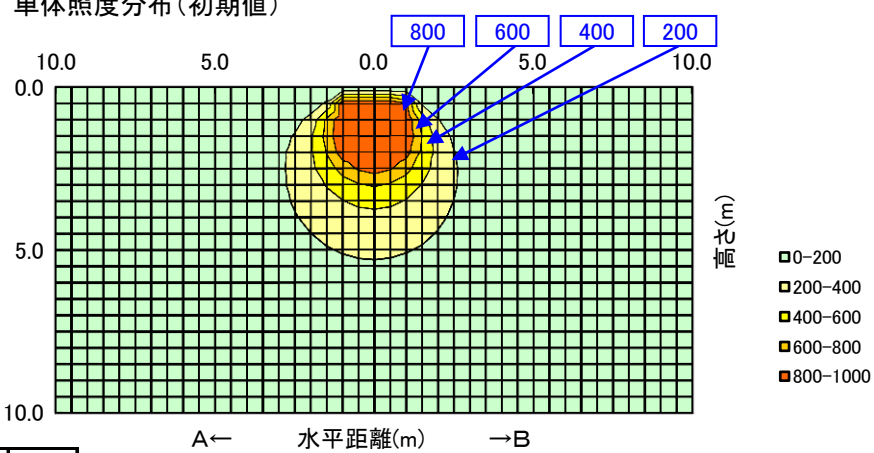
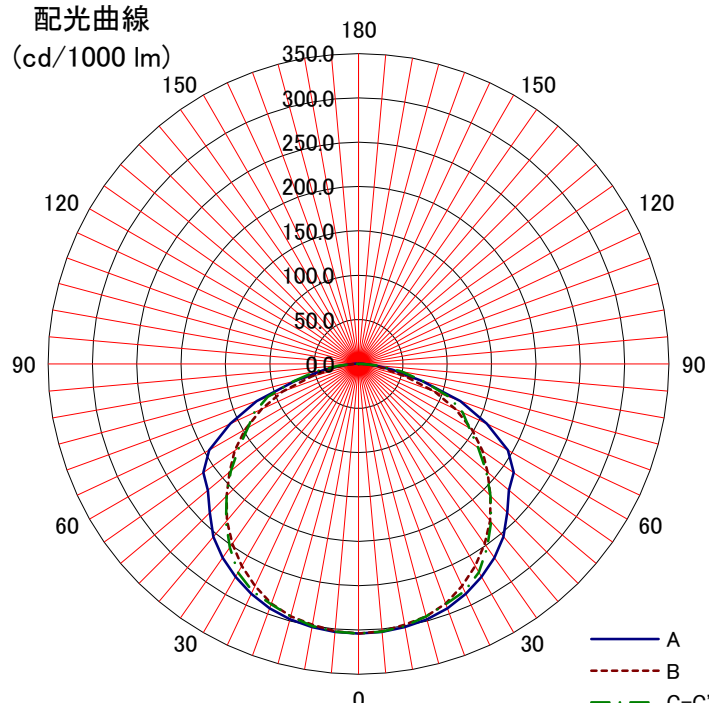


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													
形式: MTE17AWN-J14A	室指数		固有照明率 S/H=1.0													
<備考> 配光角(特広角)	0.6	0.55	0.43	0.35	0.54	0.42	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.30	0.28	
	0.8	0.64	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.39	0.37	
姿図 	1	0.70	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.51	0.46	0.56	0.50	0.46	0.43	
	1.25	0.76	0.66	0.59	0.74	0.65	0.59	0.53	0.64	0.58	0.53	0.62	0.57	0.52	0.50	
	1.5	0.80	0.72	0.65	0.79	0.71	0.64	0.59	0.69	0.63	0.59	0.67	0.62	0.58	0.56	
	2	0.86	0.79	0.73	0.84	0.78	0.72	0.67	0.76	0.71	0.67	0.74	0.70	0.66	0.63	
	2.5	0.89	0.83	0.78	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.74	0.71	0.68	
	3	0.92	0.86	0.81	0.90	0.85	0.81	0.77	0.83	0.79	0.76	0.81	0.77	0.75	0.72	
光源形式 -	4	0.95	0.90	0.86	0.93	0.89	0.85	0.82	0.87	0.84	0.81	0.85	0.82	0.80	0.77	
	5	0.97	0.93	0.90	0.95	0.92	0.89	0.86	0.90	0.87	0.85	0.87	0.85	0.83	0.80	
器具光束 18,400 lm	7	0.99	0.96	0.94	0.98	0.95	0.93	0.91	0.93	0.91	0.89	0.91	0.89	0.88	0.85	
	10	1.01	0.99	0.97	1.00	0.98	0.96	0.95	0.96	0.94	0.93	0.94	0.92	0.91	0.88	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.36 H																
B-B 1.30 H																
保守率	良	0.81	配光曲線 (cd/1000 lm) 													
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	304	304	304													
10	301	299	300													
20	293	288	288													
30	277	263	272													
40	254	231	233													
50	222	190	188													
60	194	148	144													
70	122	92	109													
80	39	28	49													
90	6	5	5													
100																
110																
120																
130																
140																
150																
160																
170																
180																