


日立照明器具 照明特性

形式: HNK4105V-J14 <初期照度補正形>		天井 反射率	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													0%
		室指数	照明率 S/H=1.0														
	0.6	0.51	0.39	0.31	0.49	0.38	0.31	0.25	0.37	0.30	0.25	0.35	0.29	0.25	0.23		
	0.8	0.59	0.48	0.40	0.58	0.47	0.39	0.33	0.45	0.38	0.33	0.43	0.37	0.33	0.30		
	1	0.65	0.54	0.46	0.63	0.53	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.36		
	1.25	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42		
	1.5	0.75	0.65	0.58	0.73	0.64	0.57	0.51	0.62	0.55	0.50	0.59	0.54	0.50	0.47		
	2	0.80	0.72	0.65	0.78	0.71	0.64	0.59	0.68	0.63	0.58	0.66	0.61	0.57	0.54		
	2.5	0.84	0.76	0.70	0.82	0.75	0.69	0.64	0.72	0.67	0.63	0.70	0.65	0.62	0.59		
	3	0.86	0.80	0.74	0.84	0.78	0.73	0.68	0.75	0.71	0.67	0.73	0.69	0.65	0.62		
光源		4	0.89	0.84	0.79	0.87	0.82	0.78	0.74	0.80	0.76	0.72	0.77	0.74	0.71	0.67	
品名	Hf蛍光ランプ	5	0.92	0.87	0.83	0.90	0.85	0.82	0.78	0.83	0.79	0.76	0.80	0.77	0.74	0.71	
形式	FHF32EX-N-VL	7	0.94	0.91	0.88	0.92	0.89	0.86	0.83	0.86	0.84	0.81	0.84	0.82	0.80	0.76	
光束	3,520 lm	10	0.96	0.94	0.92	0.95	0.92	0.90	0.88	0.90	0.88	0.86	0.87	0.85	0.84	0.80	

器具効率 Ft=	94.2%
上方光束 Fu=	2.9%
下方光束 Fd=	91.3%
配光分類	BZ-
最大取付間隔	
A-A	1.38 H
B-B	1.26 H
保守率	良 0.73
	中 0.69
	否 0.61

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	246	246	246		
10	245	240	244		
20	240	229	235		
30	227	207	219		
40	212	177	196		
50	197	149	174		
60	174	112	146		
70	143	70	114		
80	125	34	86		
90	88		53		
100	23		2		
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

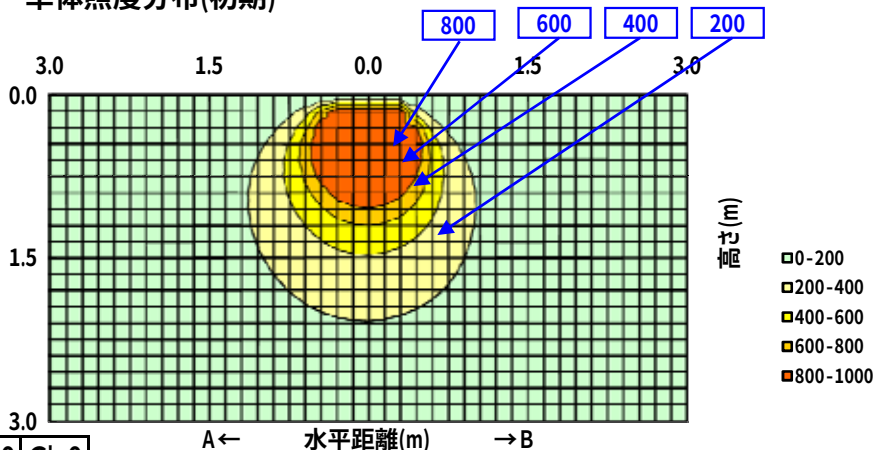

配光曲線

