


日立照明器具 照明特性

形式: HNK4205V-JU14 <初期照度補正形>		反射率	天井	80%			70%				50%			30%			0%
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
	0.6	0.49	0.38	0.31	0.48	0.37	0.30	0.26	0.36	0.30	0.25	0.35	0.29	0.25	0.23		
	0.8	0.57	0.47	0.39	0.56	0.46	0.39	0.34	0.44	0.38	0.33	0.43	0.37	0.33	0.31		
	1	0.63	0.53	0.45	0.61	0.52	0.45	0.40	0.50	0.44	0.39	0.49	0.43	0.39	0.37		
	1.25	0.68	0.59	0.52	0.67	0.58	0.51	0.46	0.56	0.50	0.45	0.54	0.49	0.45	0.43		
	1.5	0.72	0.64	0.57	0.71	0.63	0.56	0.51	0.61	0.55	0.51	0.59	0.54	0.50	0.48		
	2	0.78	0.70	0.64	0.76	0.69	0.64	0.59	0.67	0.62	0.58	0.65	0.61	0.57	0.55		
	2.5	0.81	0.74	0.69	0.79	0.73	0.68	0.64	0.71	0.67	0.63	0.69	0.65	0.62	0.59		
	3	0.83	0.77	0.72	0.81	0.76	0.72	0.68	0.74	0.70	0.67	0.72	0.68	0.65	0.63		
光源		4	0.86	0.81	0.77	0.84	0.80	0.76	0.73	0.78	0.75	0.72	0.76	0.73	0.70	0.68	
品名	Hf蛍光ランプ	5	0.88	0.84	0.81	0.86	0.83	0.80	0.77	0.81	0.78	0.75	0.78	0.76	0.74	0.71	
形式	FHF32EX-N-VL	7	0.90	0.88	0.85	0.89	0.86	0.84	0.82	0.84	0.82	0.80	0.82	0.80	0.78	0.75	
器具光束	9,600 lm	10	0.92	0.90	0.88	0.91	0.89	0.87	0.86	0.87	0.85	0.84	0.84	0.83	0.82	0.79	

器具効率 Ft=	88.9%
上方光束 Fu=	1.2%
下方光束 Fd=	87.7%
配光分類	BZ-
最大取付間隔	
A-A	1.38 H
B-B	1.26 H
保守率	良 0.73
	中 0.69
	否 0.61

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	256	256	256		
10	252	251	251		
20	244	237	240		
30	234	215	223		
40	216	188	203		
50	192	152	175		
60	169	115	145		
70	133	76	113		
80	80	30	64		
90	32		19		
100	11		2		
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

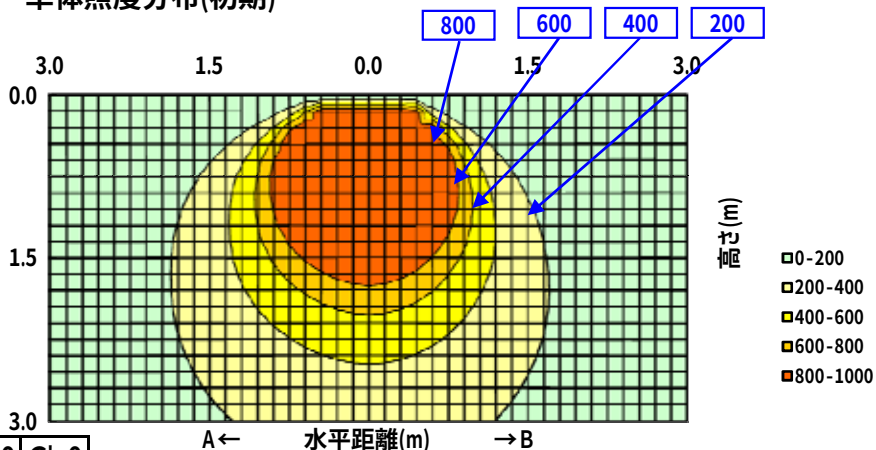

配光曲線

