


日立照明器具 照明特性

形式: HNM4105V-JU14 <初期照度補正形>		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.47	0.35	0.27	0.44	0.33	0.26	0.21	0.30	0.24	0.19	0.27	0.21	0.17	0.14		
		0.8	0.56	0.44	0.36	0.52	0.41	0.34	0.28	0.37	0.31	0.26	0.33	0.27	0.23	0.18		
		1	0.61	0.50	0.42	0.58	0.47	0.40	0.34	0.42	0.36	0.31	0.37	0.32	0.28	0.22		
		1.25	0.67	0.56	0.48	0.63	0.53	0.46	0.40	0.47	0.41	0.36	0.42	0.37	0.33	0.26		
		1.5	0.71	0.61	0.53	0.67	0.58	0.51	0.45	0.52	0.46	0.41	0.46	0.41	0.37	0.30		
		2	0.76	0.68	0.61	0.72	0.64	0.58	0.53	0.57	0.52	0.48	0.51	0.47	0.43	0.35		
		2.5	0.80	0.72	0.66	0.75	0.69	0.63	0.58	0.61	0.57	0.52	0.55	0.51	0.47	0.39		
		3	0.82	0.76	0.70	0.78	0.72	0.66	0.62	0.64	0.60	0.56	0.57	0.54	0.50	0.41		
光 源		4	0.86	0.80	0.75	0.81	0.76	0.71	0.67	0.68	0.65	0.61	0.61	0.58	0.55	0.45		
品名	Hf蛍光ランプ	5	0.88	0.83	0.79	0.83	0.79	0.75	0.71	0.71	0.68	0.65	0.63	0.61	0.58	0.48		
形式	FHF32EX-N-VL	7	0.91	0.87	0.84	0.86	0.83	0.80	0.77	0.75	0.72	0.70	0.67	0.65	0.63	0.52		
光束	4,800 lm	10	0.93	0.90	0.88	0.88	0.86	0.84	0.81	0.78	0.76	0.74	0.70	0.68	0.67	0.56		

器具効率 Ft=	96.9%
上方光束 Fu=	31.2%
下方光束 Fd=	65.8%
配光分類	BZ-
最大取付間隔	
A-A	1.70 H
B-B	1.22 H
保守率	良 0.73 中 0.69 否 0.61

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	138	138	138		
10	140	134	137		
20	145	126	136		
30	151	113	134		
40	154	95	129		
50	154	79	123		
60	149	53	114		
70	138	31	99		
80	126	11	84		
90	119		74		
100	119		77		
110	121		85		
120	125		89		
130	117		45		
140	60		1		
150					
160					
170					
180					

単体照度分布(初期)

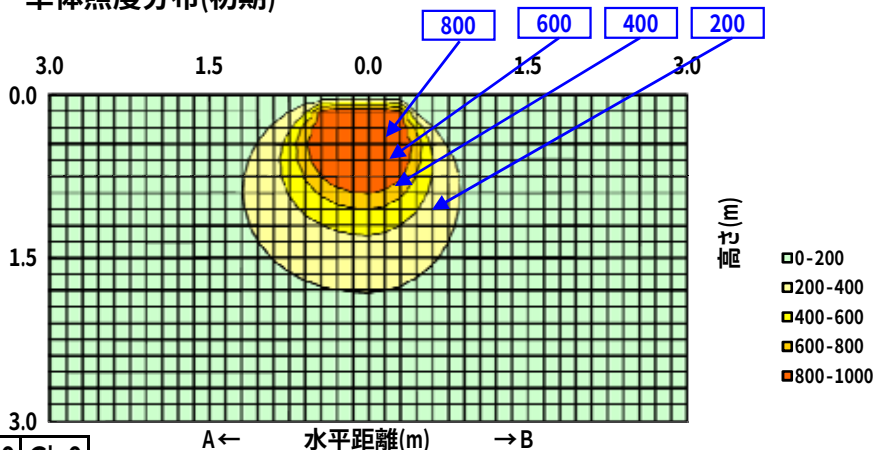

配光曲線

