

日立照明器具 照明特性

形式： HNM4205V-J14 <初期照度補正形>		反 射 率	天井	80%			70%				50%			30%			0%
姿図	壁		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	床		10%														0%
	室指数		照明率 S/H=1.0														
	0.6	0.46	0.34	0.27	0.44	0.33	0.26	0.22	0.31	0.25	0.20	0.29	0.23	0.19	0.17		
	0.8	0.54	0.43	0.35	0.51	0.41	0.34	0.29	0.38	0.32	0.27	0.35	0.30	0.26	0.22		
	1	0.59	0.49	0.41	0.57	0.47	0.40	0.34	0.43	0.37	0.32	0.40	0.35	0.31	0.27		
	1.25	0.64	0.54	0.47	0.62	0.52	0.45	0.40	0.49	0.43	0.38	0.45	0.40	0.36	0.31		
	1.5	0.68	0.59	0.52	0.65	0.57	0.50	0.45	0.53	0.47	0.42	0.49	0.44	0.40	0.35		
	2	0.74	0.66	0.59	0.70	0.63	0.57	0.52	0.59	0.54	0.49	0.54	0.50	0.46	0.41		
	2.5	0.77	0.70	0.64	0.74	0.67	0.62	0.57	0.63	0.58	0.54	0.58	0.54	0.51	0.45		
	3	0.79	0.73	0.67	0.76	0.70	0.65	0.61	0.65	0.61	0.57	0.61	0.57	0.54	0.48		
光 源		4	0.82	0.77	0.72	0.79	0.74	0.70	0.66	0.69	0.66	0.63	0.64	0.62	0.59	0.53	
品名	Hf蛍光ランプ	5	0.84	0.80	0.76	0.81	0.77	0.74	0.70	0.72	0.69	0.66	0.67	0.65	0.62	0.56	
形式	FHF32EX-N-VL	7	0.87	0.84	0.81	0.84	0.81	0.78	0.75	0.76	0.73	0.71	0.71	0.69	0.67	0.60	
光束	7,040 lm	10	0.89	0.87	0.84	0.86	0.84	0.82	0.80	0.78	0.77	0.75	0.73	0.72	0.71	0.64	

器具効率 Ft= **90.1%**
 上方光束 Fu= **16.6%**
 下方光束 Fd= **73.5%**

配光分類
BZ-


最大取付間隔
 A-A **1.52** H
 B-B **1.24** H

保守率
 良 **0.73**
 中 **0.69**
 否 **0.61**

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	176	176	176		
10	176	172	174		
20	174	163	169		
30	173	147	159		
40	171	125	149		
50	165	100	139		
60	153	73	123		
70	147	43	104		
80	124	17	91		
90	84		55		
100	75		45		
110	64		43		
120	62		35		
130	46		20		
140	25		8		
150	7				
160					
170					
180					

単体照度分布(初期)

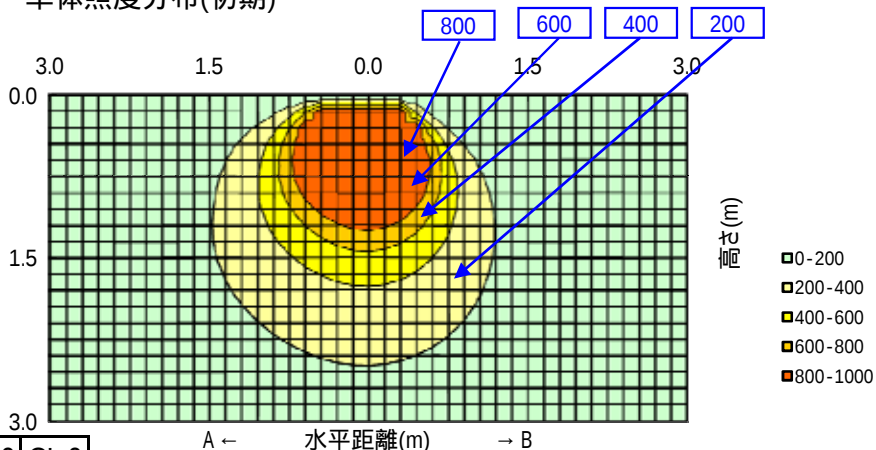

配光曲線

