


日立照明器具 照明特性

形式： HNM4223V-JU14 ＜初期照度補正形＞		反射率	天井	80%			70%				50%			30%			0%
	壁		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	床		10%														0%
	室指数		照明率 S/H=1.0														
姿図		0.6	0.47	0.37	0.31	0.46	0.37	0.30	0.26	0.36	0.30	0.26	0.35	0.30	0.26	0.24	
		0.8	0.55	0.46	0.39	0.54	0.45	0.39	0.34	0.44	0.38	0.34	0.43	0.38	0.34	0.32	
		1	0.61	0.52	0.45	0.59	0.51	0.45	0.40	0.49	0.44	0.40	0.48	0.43	0.39	0.38	
		1.25	0.65	0.57	0.51	0.64	0.57	0.51	0.46	0.55	0.50	0.46	0.54	0.49	0.45	0.44	
		1.5	0.69	0.62	0.56	0.68	0.61	0.56	0.51	0.59	0.55	0.51	0.58	0.54	0.50	0.48	
		2	0.74	0.68	0.63	0.73	0.67	0.62	0.58	0.65	0.61	0.58	0.64	0.60	0.57	0.55	
		2.5	0.77	0.72	0.67	0.76	0.71	0.67	0.63	0.69	0.65	0.62	0.67	0.64	0.62	0.59	
		3	0.79	0.74	0.70	0.78	0.73	0.70	0.66	0.71	0.68	0.65	0.70	0.67	0.65	0.62	
光源		4	0.81	0.78	0.75	0.80	0.77	0.74	0.71	0.75	0.72	0.70	0.73	0.71	0.69	0.67	
品名	Hf蛍光ランプ	5	0.83	0.80	0.77	0.82	0.79	0.77	0.74	0.77	0.75	0.73	0.75	0.74	0.72	0.70	
形式	FHF32EX-N-VL	7	0.85	0.83	0.81	0.84	0.82	0.80	0.78	0.80	0.79	0.77	0.78	0.77	0.76	0.73	
器具光束	9,600 lm	10	0.87	0.85	0.84	0.86	0.84	0.83	0.82	0.82	0.81	0.80	0.81	0.80	0.79	0.76	

器具効率 Ft=	82.5%
上方光束 Fu=	0.0%
下方光束 Fd=	82.5%
配光分類	BZ-
最大取付間隔	
A-A	1.34 H
B-B	1.26 H
保守率	良 0.73
	中 0.69
	否 0.61

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	267	267	267		
10	264	261	264		
20	254	246	251		
30	237	223	230		
40	218	194	205		
50	194	161	178		
60	155	116	143		
70	84	79	95		
80	29	30	32		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

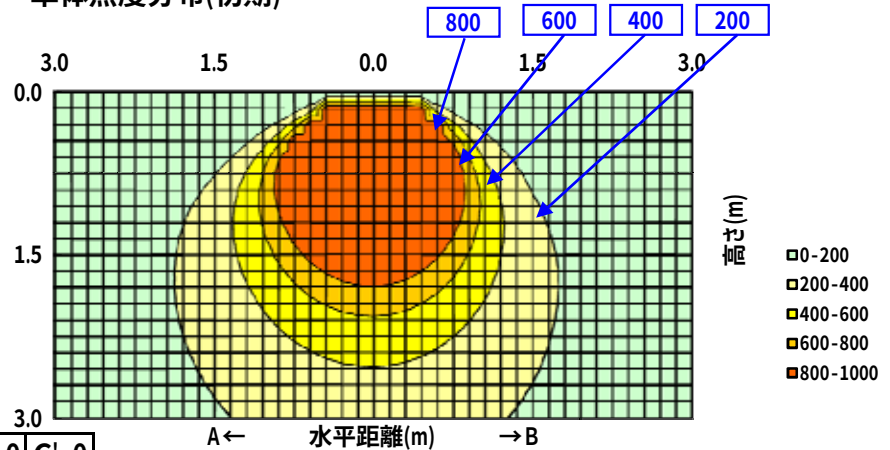

配光曲線

