


日立照明器具 照明特性

形式: HPM4105V-J14 <初期照度補正形>		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.48	0.36	0.28	0.46	0.34	0.27	0.22	0.31	0.25	0.21	0.28	0.23	0.19	0.15		
		0.8	0.57	0.45	0.36	0.53	0.43	0.35	0.29	0.39	0.32	0.27	0.35	0.29	0.25	0.21		
		1	0.62	0.51	0.43	0.59	0.49	0.41	0.35	0.44	0.38	0.33	0.40	0.34	0.30	0.25		
		1.25	0.68	0.57	0.49	0.64	0.55	0.47	0.41	0.49	0.43	0.38	0.45	0.39	0.35	0.29		
		1.5	0.72	0.62	0.54	0.68	0.59	0.52	0.47	0.54	0.48	0.43	0.49	0.44	0.40	0.33		
		2	0.78	0.69	0.62	0.74	0.66	0.59	0.54	0.60	0.54	0.50	0.54	0.50	0.46	0.39		
		2.5	0.81	0.74	0.67	0.77	0.70	0.64	0.59	0.64	0.59	0.55	0.58	0.54	0.50	0.43		
		3	0.84	0.77	0.71	0.79	0.73	0.68	0.63	0.67	0.62	0.58	0.60	0.57	0.54	0.46		
光 源		4	0.87	0.81	0.76	0.83	0.78	0.73	0.69	0.71	0.67	0.64	0.64	0.61	0.58	0.50		
品名	Hf蛍光ランプ	5	0.89	0.84	0.80	0.85	0.81	0.77	0.73	0.74	0.70	0.67	0.67	0.64	0.62	0.53		
形式	FHF32EX-N-VL	7	0.92	0.88	0.85	0.88	0.84	0.81	0.78	0.77	0.75	0.72	0.70	0.68	0.66	0.57		
光束	3,520 lm	10	0.94	0.91	0.89	0.90	0.88	0.85	0.83	0.80	0.78	0.77	0.73	0.72	0.70	0.61		

器具効率 Ft=	97.0%
上方光束 Fu=	25.9%
下方光束 Fd=	71.1%
配光分類	BZ-
最大取付間隔	
A-A	1.58 H
B-B	1.24 H
保守率	良 0.73
	中 0.69
	否 0.61

単体照度分布(初期)

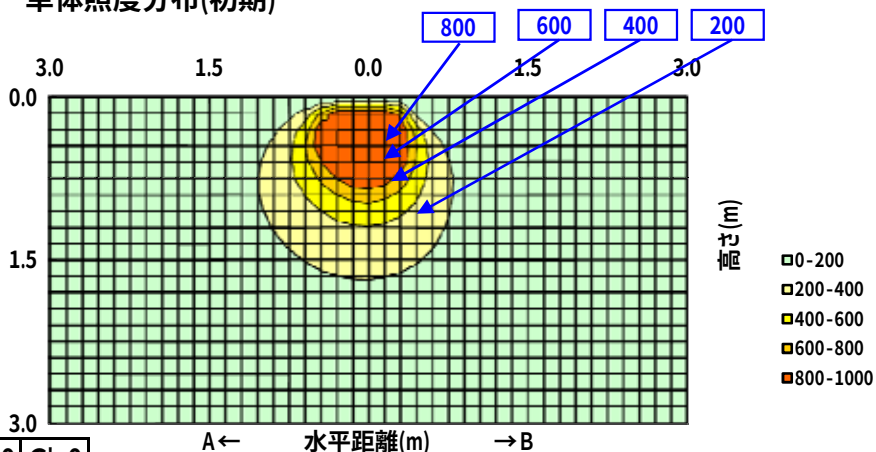

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	160	160	160		
10	162	156	160		
20	163	148	157		
30	163	132	149		
40	164	111	141		
50	162	92	133		
60	155	66	121		
70	141	37	105		
80	126	16	86		
90	118		74		
100	119		77		
110	120		81		
120	108		52		
130	66		18		
140	25		1		
150					
160					
170					
180					

配光曲線

