


日立照明器具 照明特性

形式：LDA1020S +LDA10D-G/80C		反 射 率	天井	80%			70%				50%			30%			0%
	壁		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	床		10%														0%
	室指数		照明率 S/H=1.0														
姿図 	0.6	0.48	0.39	0.34	0.47	0.39	0.34	0.30	0.38	0.33	0.30	0.37	0.33	0.30	0.29		
	0.8	0.56	0.48	0.43	0.55	0.47	0.42	0.39	0.46	0.42	0.38	0.45	0.41	0.38	0.37		
	1	0.61	0.54	0.49	0.60	0.53	0.48	0.45	0.52	0.48	0.44	0.51	0.47	0.44	0.43		
	1.25	0.65	0.59	0.54	0.64	0.58	0.54	0.50	0.57	0.53	0.50	0.56	0.52	0.49	0.48		
	1.5	0.68	0.63	0.58	0.67	0.62	0.58	0.55	0.61	0.57	0.54	0.59	0.56	0.54	0.52		
	2	0.72	0.68	0.64	0.71	0.67	0.63	0.61	0.65	0.63	0.60	0.64	0.62	0.59	0.58		
	2.5	0.74	0.70	0.67	0.73	0.70	0.67	0.64	0.68	0.66	0.63	0.67	0.65	0.63	0.61		
	3	0.76	0.72	0.69	0.75	0.72	0.69	0.67	0.70	0.68	0.66	0.69	0.67	0.65	0.63		
光 源		4	0.78	0.75	0.73	0.77	0.74	0.72	0.70	0.73	0.71	0.69	0.71	0.69	0.68	0.66	
品名	LED電球	5	0.79	0.77	0.75	0.78	0.76	0.74	0.72	0.74	0.73	0.71	0.73	0.71	0.70	0.68	
形式	LDA10D-G/80C	7	0.81	0.79	0.78	0.80	0.78	0.77	0.76	0.77	0.75	0.74	0.75	0.74	0.73	0.71	
光束	1,160 lm	10	0.82	0.81	0.80	0.81	0.80	0.79	0.78	0.78	0.78	0.77	0.77	0.76	0.76	0.73	

器具効率 $F_t = 76.9\%$

上方光束 $F_u = 0.0\%$

下方光束 $F_d = 76.9\%$

配光分類

BZ-

最大取付間隔

A-A 1.38 H


B-B H

保守率	良	0.63
	中	0.60
	否	0.53

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	302				
10	300				
20	295				
30	284				
40	243				
50	171				
60	88				
70	32				
80	8				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

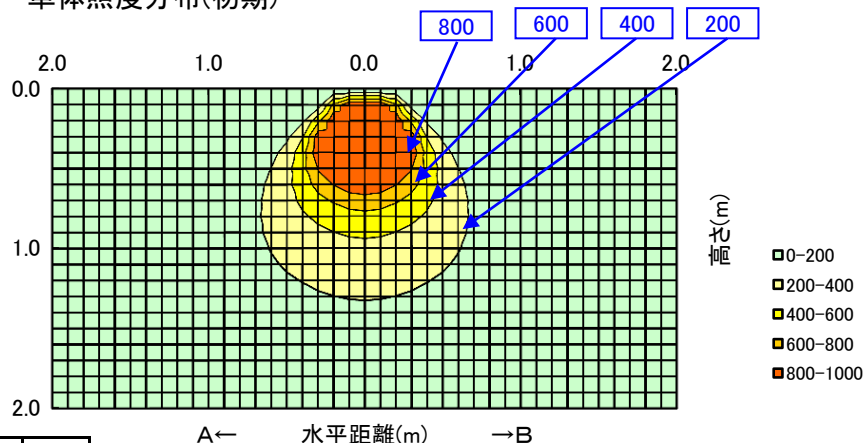

配光曲線

