



日立照明器具 照明特性

形式：LDE1020S +LDA9D-G/60HC		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.51	0.44	0.39	0.50	0.43	0.39	0.36	0.43	0.39	0.36	0.42	0.38	0.35	0.34		
		0.8	0.58	0.52	0.47	0.57	0.51	0.47	0.44	0.50	0.46	0.44	0.49	0.46	0.43	0.42		
		1	0.62	0.57	0.52	0.62	0.56	0.52	0.49	0.55	0.52	0.49	0.54	0.51	0.49	0.47		
		1.25	0.66	0.61	0.57	0.65	0.61	0.57	0.54	0.59	0.56	0.54	0.58	0.56	0.53	0.52		
		1.5	0.69	0.64	0.61	0.68	0.64	0.61	0.58	0.63	0.60	0.58	0.62	0.59	0.57	0.56		
		2	0.72	0.69	0.66	0.71	0.68	0.65	0.63	0.67	0.64	0.62	0.65	0.63	0.62	0.60		
		2.5	0.74	0.71	0.68	0.73	0.70	0.68	0.66	0.69	0.67	0.65	0.68	0.66	0.64	0.63		
		3	0.75	0.72	0.70	0.74	0.72	0.69	0.68	0.70	0.68	0.67	0.69	0.67	0.66	0.64		
光 源		4	0.76	0.74	0.72	0.75	0.74	0.72	0.70	0.72	0.71	0.69	0.71	0.69	0.68	0.67		
品名	LED電球	5	0.77	0.76	0.74	0.77	0.75	0.74	0.72	0.73	0.72	0.71	0.72	0.71	0.70	0.68		
形式	LDA9D-G/60HC	7	0.79	0.78	0.77	0.78	0.77	0.76	0.75	0.75	0.75	0.74	0.74	0.73	0.73	0.71		
光束	1,000 lm	10	0.80	0.79	0.79	0.79	0.78	0.78	0.77	0.77	0.76	0.76	0.75	0.75	0.75	0.73		

器具効率 Ft= 74.6%		
上方光束 Fu= 0.0%		
下方光束 Fd= 74.6%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.18	H
B-B		H
保守率	良	0.63
	中	0.60
	否	0.53

単体照度分布(初期)

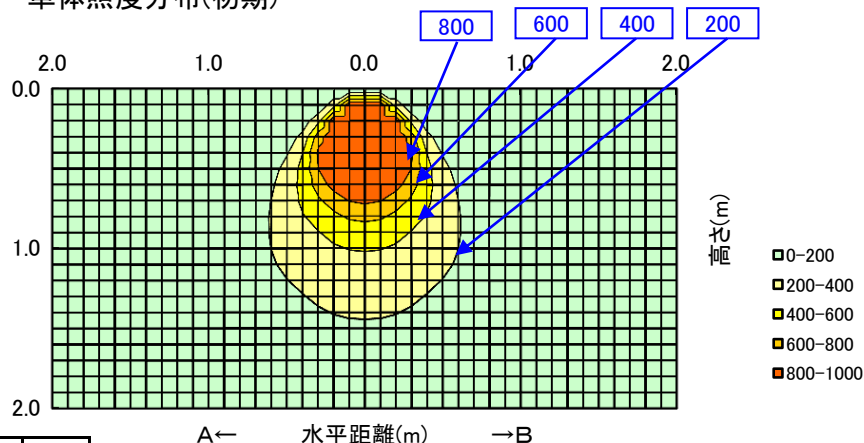

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	415				
10	407				
20	367				
30	328				
40	234				
50	135				
60	59				
70	9				
80					
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線

