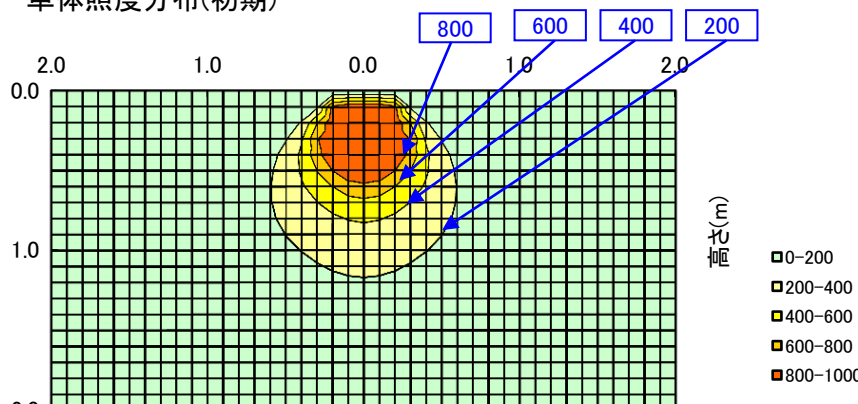
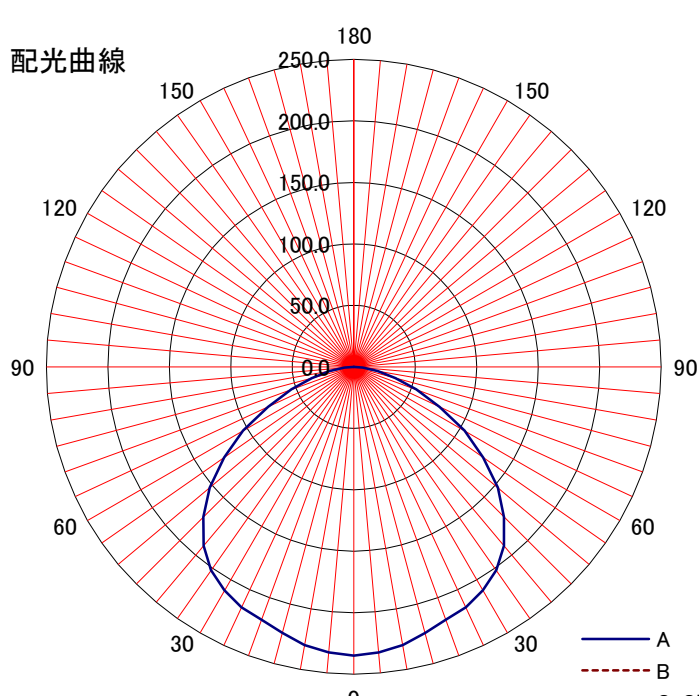


日立照明器具 照明特性

形式: LDE1020W +LDA10D-G/80C		反 射 率	天井	80%			70%				50%			30%			0%
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
姿図 		0.6	0.40	0.32	0.27	0.39	0.31	0.27	0.23	0.31	0.26	0.23	0.30	0.26	0.23	0.22	
		0.8	0.47	0.39	0.34	0.46	0.39	0.34	0.30	0.38	0.33	0.30	0.37	0.33	0.30	0.28	
		1	0.51	0.44	0.39	0.50	0.44	0.39	0.35	0.43	0.38	0.35	0.42	0.38	0.35	0.33	
		1.25	0.55	0.49	0.44	0.54	0.48	0.44	0.40	0.47	0.43	0.40	0.46	0.43	0.40	0.38	
		1.5	0.58	0.53	0.48	0.57	0.52	0.48	0.45	0.51	0.47	0.44	0.50	0.46	0.44	0.42	
		2	0.62	0.58	0.54	0.61	0.57	0.53	0.50	0.56	0.52	0.50	0.54	0.52	0.49	0.48	
		2.5	0.65	0.60	0.57	0.63	0.60	0.57	0.54	0.58	0.56	0.53	0.57	0.55	0.53	0.51	
		3	0.66	0.62	0.59	0.65	0.62	0.59	0.56	0.60	0.58	0.56	0.59	0.57	0.55	0.53	
光 源		4	0.68	0.65	0.63	0.67	0.64	0.62	0.60	0.63	0.61	0.59	0.61	0.60	0.58	0.56	
品名	LED電球	5	0.69	0.67	0.65	0.68	0.66	0.64	0.62	0.65	0.63	0.62	0.63	0.62	0.61	0.59	
形式	LDA10D-G/80C	7	0.71	0.69	0.68	0.70	0.68	0.67	0.66	0.67	0.66	0.65	0.65	0.64	0.64	0.62	
光束	1,160 lm	10	0.72	0.71	0.70	0.71	0.70	0.69	0.68	0.69	0.68	0.67	0.67	0.67	0.66	0.64	
器具効率 Ft= 68.3%			単体照度分布(初期) 														
上方光束 Fu= 0.0%																	
下方光束 Fd= 68.3%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.34 H																	
B-B H																	
保守率	良	0.63															
	中	0.60															
	否	0.53															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0	配光曲線 											
0	235																
10	230																
20	219																
30	210																
40	190																
50	153																
60	104																
70	54																
80	20																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	