



日立照明器具 照明特性

形式：LDE1020W +LDA7D-G/D/60C		反 射 率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.41	0.34	0.29	0.40	0.33	0.29	0.26	0.33	0.28	0.26	0.32	0.28	0.25	0.24			
		0.8	0.47	0.41	0.36	0.46	0.40	0.36	0.33	0.39	0.35	0.32	0.38	0.35	0.32	0.31			
		1	0.51	0.45	0.41	0.50	0.45	0.41	0.37	0.44	0.40	0.37	0.43	0.40	0.37	0.36			
		1.25	0.55	0.50	0.46	0.54	0.49	0.45	0.42	0.48	0.45	0.42	0.47	0.44	0.42	0.40			
		1.5	0.58	0.53	0.49	0.57	0.52	0.49	0.46	0.51	0.48	0.46	0.50	0.47	0.45	0.44			
		2	0.61	0.57	0.54	0.60	0.57	0.54	0.51	0.55	0.53	0.51	0.54	0.52	0.50	0.49			
		2.5	0.63	0.60	0.57	0.62	0.59	0.56	0.54	0.58	0.55	0.53	0.56	0.55	0.53	0.51			
		3	0.64	0.61	0.59	0.63	0.61	0.58	0.56	0.59	0.57	0.55	0.58	0.56	0.55	0.53			
光 源		4	0.66	0.64	0.62	0.65	0.63	0.61	0.59	0.61	0.60	0.58	0.60	0.59	0.58	0.56			
品名	LED電球	5	0.67	0.65	0.63	0.66	0.64	0.63	0.61	0.63	0.62	0.60	0.62	0.61	0.59	0.58			
形式	LDA7D-G/D/60C	7	0.68	0.67	0.66	0.68	0.66	0.65	0.64	0.65	0.64	0.63	0.64	0.63	0.62	0.60			
光束	810 lm	10	0.69	0.69	0.68	0.69	0.68	0.67	0.66	0.66	0.66	0.65	0.65	0.65	0.64	0.62			

器具効率 F_t =	65.4%
上方光束 F_u =	0.0%
下方光束 F_d =	65.4%
配光分類	BZ-
最大取付間隔	
A-A	1.26 H
B-B	H
保守率	良 0.63 中 0.60 否 0.53

単体照度分布(初期)

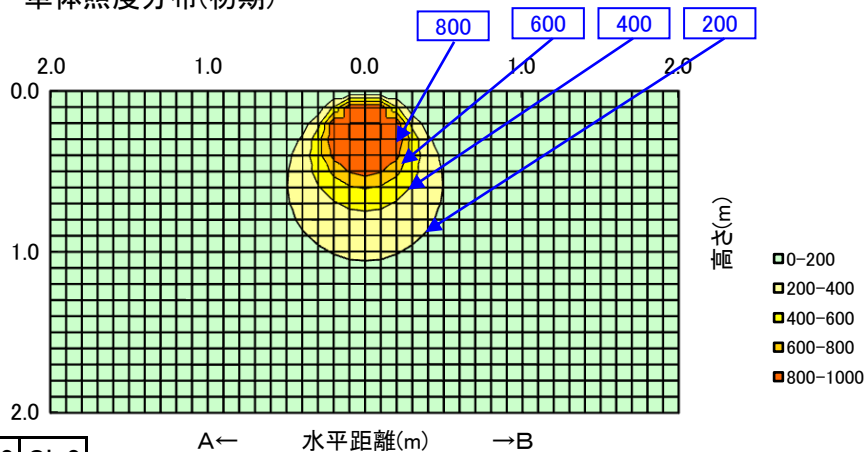

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	274				
10	271				
20	255				
30	233				
40	192				
50	140				
60	80				
70	35				
80	9				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

