
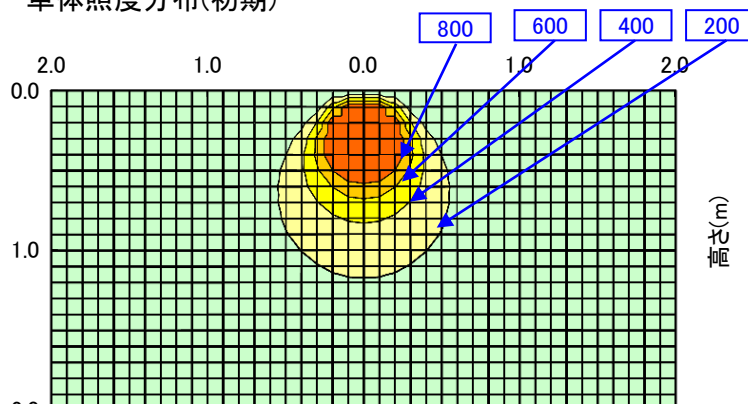
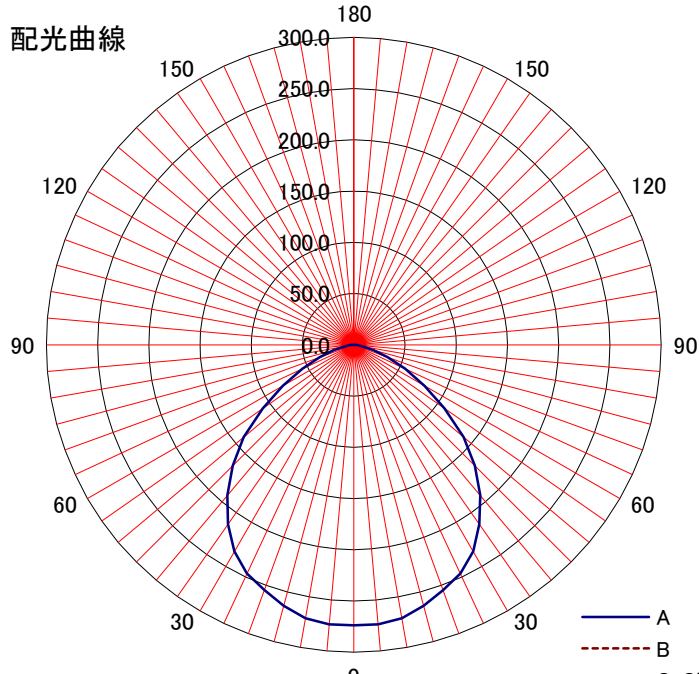


日立照明器具 照明特性

形式: LDE1020W +LDA9D-G/60HC		天井	80%			70%				50%			30%			0%	
		反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%														0%
		室指数	照明率 S/H=1.0														
		0.6	0.41	0.34	0.29	0.40	0.33	0.29	0.26	0.33	0.28	0.26	0.32	0.28	0.25	0.24	
		0.8	0.47	0.41	0.36	0.46	0.40	0.36	0.33	0.39	0.35	0.32	0.38	0.35	0.32	0.31	
		1	0.51	0.45	0.41	0.50	0.45	0.41	0.37	0.44	0.40	0.37	0.43	0.40	0.37	0.36	
		1.25	0.55	0.50	0.46	0.54	0.49	0.45	0.42	0.48	0.45	0.42	0.47	0.44	0.42	0.40	
		1.5	0.58	0.53	0.49	0.57	0.52	0.49	0.46	0.51	0.48	0.46	0.50	0.47	0.45	0.44	
		2	0.61	0.57	0.54	0.60	0.57	0.54	0.51	0.55	0.53	0.51	0.54	0.52	0.50	0.49	
		2.5	0.63	0.60	0.57	0.62	0.59	0.56	0.54	0.58	0.55	0.53	0.56	0.55	0.53	0.51	
		3	0.64	0.61	0.59	0.63	0.61	0.58	0.56	0.59	0.57	0.55	0.58	0.56	0.55	0.53	
光源		4	0.66	0.64	0.62	0.65	0.63	0.61	0.59	0.61	0.60	0.58	0.60	0.59	0.58	0.56	
品名	LED電球	5	0.67	0.65	0.63	0.66	0.64	0.63	0.61	0.63	0.62	0.60	0.62	0.61	0.59	0.58	
形式	LDA9D-G/60HC	7	0.68	0.67	0.66	0.68	0.66	0.65	0.64	0.65	0.64	0.63	0.64	0.63	0.62	0.60	
光束	1,000 lm	10	0.69	0.69	0.68	0.69	0.68	0.67	0.66	0.66	0.66	0.65	0.65	0.64	0.62		
器具効率 Ft= 65.4%			単体照度分布(初期)  0-200 200-400 400-600 600-800 800-1000 A← 水平距離(m) →B														
上方光束 Fu= 0.0%																	
下方光束 Fd= 65.4%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.26 H																	
B-B H																	
保守率	良	0.63															
	中	0.60															
	否	0.53															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0	配光曲線  A B C-C'											
0	274																
10	271																
20	255																
30	233																
40	192																
50	140																
60	80																
70	35																
80	9																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	