


## 日立照明器具 照明特性

|                                                                                                            |              |             |      |             |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
|------------------------------------------------------------------------------------------------------------|--------------|-------------|------|-------------|------|------|------|------|------|------|------|------|------|------|------|------|----|----|
| 形式：LDE1020WB<br>+LDA10D-G/80C                                                                              |              | 反<br>射<br>率 | 天井   | 80%         |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0% |    |
|                                                                                                            |              |             | 壁    | 70%         | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0% |    |
|                                                                                                            |              |             | 床    | 10%         |      |      |      |      |      |      |      |      |      |      |      |      |    | 0% |
|                                                                                                            |              |             | 室指数  | 照明率 S/H=1.0 |      |      |      |      |      |      |      |      |      |      |      |      |    |    |
| <div>姿図</div> <div></div> |              | 0.6         | 0.40 | 0.32        | 0.27 | 0.39 | 0.31 | 0.27 | 0.23 | 0.31 | 0.26 | 0.23 | 0.30 | 0.26 | 0.23 | 0.22 |    |    |
|                                                                                                            |              | 0.8         | 0.47 | 0.39        | 0.34 | 0.46 | 0.39 | 0.34 | 0.30 | 0.38 | 0.33 | 0.30 | 0.37 | 0.33 | 0.30 | 0.28 |    |    |
|                                                                                                            |              | 1           | 0.51 | 0.44        | 0.39 | 0.50 | 0.44 | 0.39 | 0.35 | 0.43 | 0.38 | 0.35 | 0.42 | 0.38 | 0.35 | 0.33 |    |    |
|                                                                                                            |              | 1.25        | 0.55 | 0.49        | 0.44 | 0.54 | 0.48 | 0.44 | 0.40 | 0.47 | 0.43 | 0.40 | 0.46 | 0.43 | 0.40 | 0.38 |    |    |
|                                                                                                            |              | 1.5         | 0.58 | 0.53        | 0.48 | 0.57 | 0.52 | 0.48 | 0.45 | 0.51 | 0.47 | 0.44 | 0.50 | 0.46 | 0.44 | 0.42 |    |    |
|                                                                                                            |              | 2           | 0.62 | 0.58        | 0.54 | 0.61 | 0.57 | 0.53 | 0.50 | 0.56 | 0.52 | 0.50 | 0.54 | 0.52 | 0.49 | 0.48 |    |    |
|                                                                                                            |              | 2.5         | 0.65 | 0.60        | 0.57 | 0.63 | 0.60 | 0.57 | 0.54 | 0.58 | 0.56 | 0.53 | 0.57 | 0.55 | 0.53 | 0.51 |    |    |
|                                                                                                            |              | 3           | 0.66 | 0.62        | 0.59 | 0.65 | 0.62 | 0.59 | 0.56 | 0.60 | 0.58 | 0.56 | 0.59 | 0.57 | 0.55 | 0.53 |    |    |
| 光 源                                                                                                        |              | 4           | 0.68 | 0.65        | 0.63 | 0.67 | 0.64 | 0.62 | 0.60 | 0.63 | 0.61 | 0.59 | 0.61 | 0.60 | 0.58 | 0.56 |    |    |
| 品名                                                                                                         | LED電球        | 5           | 0.69 | 0.67        | 0.65 | 0.68 | 0.66 | 0.64 | 0.62 | 0.65 | 0.63 | 0.62 | 0.63 | 0.62 | 0.61 | 0.59 |    |    |
| 形式                                                                                                         | LDA10D-G/80C | 7           | 0.71 | 0.69        | 0.68 | 0.70 | 0.68 | 0.67 | 0.66 | 0.67 | 0.66 | 0.65 | 0.65 | 0.64 | 0.64 | 0.62 |    |    |
| 光束                                                                                                         | 1,160 lm     | 10          | 0.72 | 0.71        | 0.70 | 0.71 | 0.70 | 0.69 | 0.68 | 0.69 | 0.68 | 0.67 | 0.67 | 0.67 | 0.66 | 0.64 |    |    |

器具効率  $F_t = 68.3\%$

上方光束  $F_u = 0.0\%$

下方光束  $F_d = 68.3\%$

配光分類

BZ-

最大取付間隔

A-A 1.34 H


B-B H

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.63 |
|     | 中 | 0.60 |
|     | 否 | 0.53 |

光度 (cd/1000 lm)

|     | A-0 | B-B | C-0 | A'-0 | C'-0 |
|-----|-----|-----|-----|------|------|
| 0   | 235 |     |     |      |      |
| 10  | 230 |     |     |      |      |
| 20  | 219 |     |     |      |      |
| 30  | 210 |     |     |      |      |
| 40  | 190 |     |     |      |      |
| 50  | 153 |     |     |      |      |
| 60  | 104 |     |     |      |      |
| 70  | 54  |     |     |      |      |
| 80  | 20  |     |     |      |      |
| 90  |     |     |     |      |      |
| 100 |     |     |     |      |      |
| 110 |     |     |     |      |      |
| 120 |     |     |     |      |      |
| 130 |     |     |     |      |      |
| 140 |     |     |     |      |      |
| 150 |     |     |     |      |      |
| 160 |     |     |     |      |      |
| 170 |     |     |     |      |      |
| 180 |     |     |     |      |      |

単体照度分布(初期)

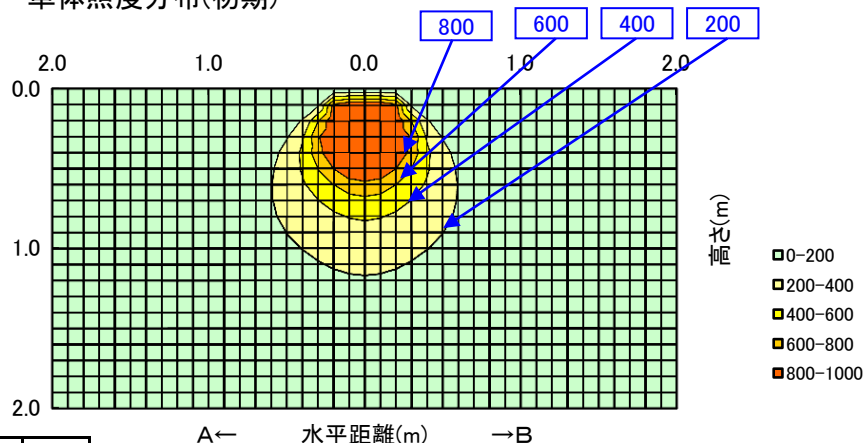

配光曲線

