


日立照明器具 照明特性

形式: LDE1020WB +LDA6D-G/40A		天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 		0.6	0.41	0.34	0.29	0.40	0.33	0.29	0.26	0.33	0.28	0.26	0.32	0.28	0.25	0.24
		0.8	0.47	0.41	0.36	0.46	0.40	0.36	0.33	0.39	0.35	0.32	0.38	0.35	0.32	0.31
		1	0.51	0.45	0.41	0.50	0.45	0.41	0.37	0.44	0.40	0.37	0.43	0.40	0.37	0.36
		1.25	0.55	0.50	0.46	0.54	0.49	0.45	0.42	0.48	0.45	0.42	0.47	0.44	0.42	0.40
		1.5	0.58	0.53	0.49	0.57	0.52	0.49	0.46	0.51	0.48	0.46	0.50	0.47	0.45	0.44
		2	0.61	0.57	0.54	0.60	0.57	0.54	0.51	0.55	0.53	0.51	0.54	0.52	0.50	0.49
		2.5	0.63	0.60	0.57	0.62	0.59	0.56	0.54	0.58	0.55	0.53	0.56	0.55	0.53	0.51
		3	0.64	0.61	0.59	0.63	0.61	0.58	0.56	0.59	0.57	0.55	0.58	0.56	0.55	0.53
光源		4	0.66	0.64	0.62	0.65	0.63	0.61	0.59	0.61	0.60	0.58	0.60	0.59	0.58	0.56
品名	LED電球	5	0.67	0.65	0.63	0.66	0.64	0.63	0.61	0.63	0.62	0.60	0.62	0.61	0.59	0.58
形式	LDA6D-G/40A	7	0.68	0.67	0.66	0.68	0.66	0.65	0.64	0.65	0.64	0.63	0.64	0.63	0.62	0.60
光束	485 lm	10	0.69	0.69	0.68	0.69	0.68	0.67	0.66	0.66	0.66	0.65	0.65	0.64	0.62	

器具効率 Ft= 65.4%

上方光束 Fu= 0.0%

下方光束 Fd= 65.4%

配光分類

BZ-

最大取付間隔

A-A 1.26 H

B-B H

保守率

良 63.00


中 0.60

否 0.53

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	274				
10	271				
20	255				
30	233				
40	192				
50	140				
60	80				
70	35				
80	9				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

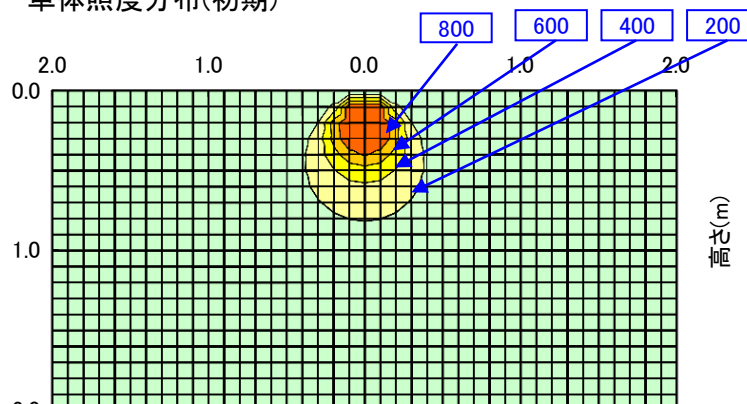

800 600 400 200

2.0 1.0 0.0 1.0 2.0

0.0 1.0 2.0

(m) 単位

0-200

200-400


400-600

600-800

800-1000

A← 水平距離(m) →B

配光曲線

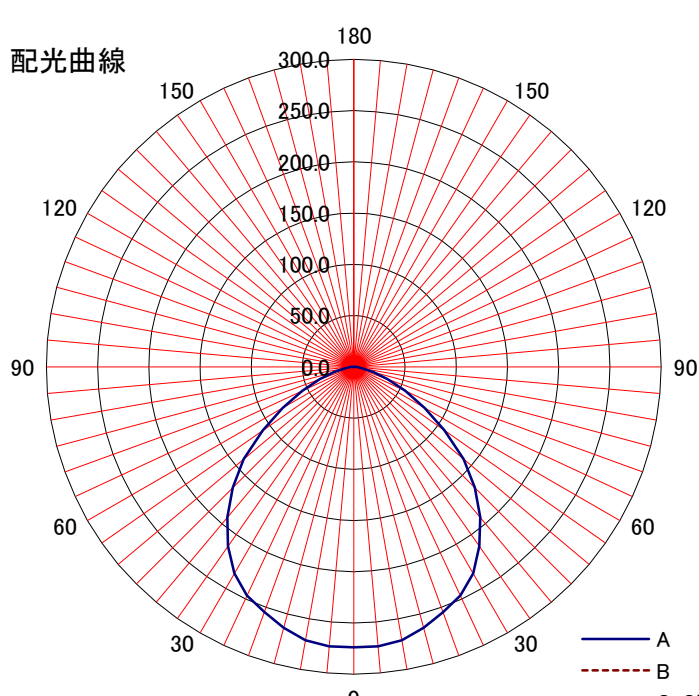

180 300.0 250.0 200.0 150.0 100.0 50.0 0.0

150 120 90 60 30 0

A

B

C-C'