
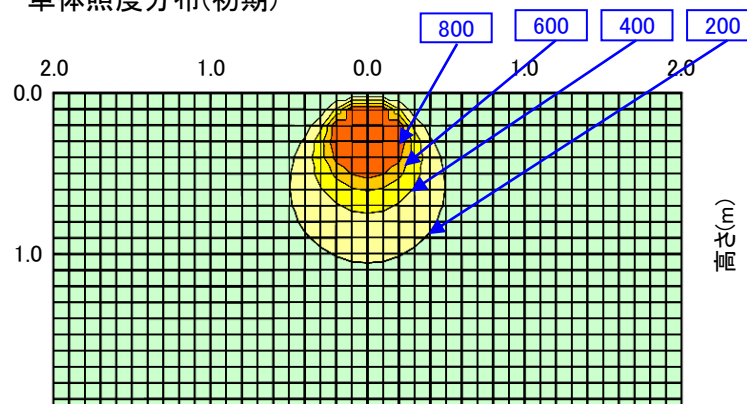
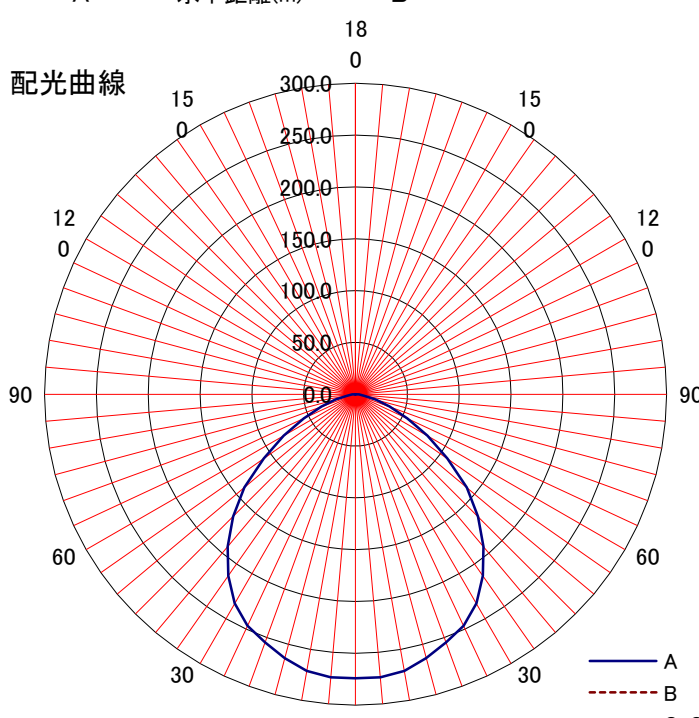


日立照明器具 照明特性

形式: LDE1020WB +LDA7D-G/D/60C		反射率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														
		室指数	照明率 S/H=1.0															
姿図 		0.6	0.41	0.34	0.29	0.40	0.33	0.29	0.26	0.33	0.28	0.26	0.32	0.28	0.25	0.24		
		0.8	0.47	0.41	0.36	0.46	0.40	0.36	0.33	0.39	0.35	0.32	0.38	0.35	0.32	0.31		
		1	0.51	0.45	0.41	0.50	0.45	0.41	0.37	0.44	0.40	0.37	0.43	0.40	0.37	0.36		
		1.25	0.55	0.50	0.46	0.54	0.49	0.45	0.42	0.48	0.45	0.42	0.47	0.44	0.42	0.40		
		1.5	0.58	0.53	0.49	0.57	0.52	0.49	0.46	0.51	0.48	0.46	0.50	0.47	0.45	0.44		
		2	0.61	0.57	0.54	0.60	0.57	0.54	0.51	0.55	0.53	0.51	0.54	0.52	0.50	0.49		
		2.5	0.63	0.60	0.57	0.62	0.59	0.56	0.54	0.58	0.55	0.53	0.56	0.55	0.53	0.51		
		3	0.64	0.61	0.59	0.63	0.61	0.58	0.56	0.59	0.57	0.55	0.58	0.56	0.55	0.53		
光源		4	0.66	0.64	0.62	0.65	0.63	0.61	0.59	0.61	0.60	0.58	0.60	0.59	0.58	0.56		
品名	LED電球	5	0.67	0.65	0.63	0.66	0.64	0.63	0.61	0.63	0.62	0.60	0.62	0.61	0.59	0.58		
形式	LDA7D-G/D/60C	7	0.68	0.67	0.66	0.68	0.66	0.65	0.64	0.65	0.64	0.63	0.64	0.63	0.62	0.60		
光束	810 lm	10	0.69	0.69	0.68	0.69	0.68	0.67	0.66	0.66	0.66	0.65	0.65	0.64	0.62	0.62		

器具効率 Ft= 65.4%			単体照度分布(初期) 															
上方光束 Fu= 0.0%																		
下方光束 Fd= 65.4%																		
配光分類																		
BZ-																		
最大取付間隔																		
A-A 1.26 H																		
B-B H																		
保守率	良	0.63																
	中	0.60																
	否	0.53																
光度 (cd/1000 lm)																		
	A-0	B-B	C-0	A'-0	C'-0	配光曲線 												
0	274																	
10	271																	
20	255																	
30	233																	
40	192																	
50	140																	
60	80																	
70	35																	
80	9																	
90																		
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		