



日立照明器具 照明特性

形式: LDE1030S +LDA11D-G/100C	反 射 率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													
			照明率 S/H=1.0													
姿図 	室指数	0.6	0.47	0.38	0.32	0.46	0.38	0.32	0.28	0.37	0.32	0.28	0.36	0.31	0.28	0.26
		0.8	0.56	0.47	0.41	0.55	0.47	0.41	0.37	0.46	0.41	0.37	0.45	0.40	0.37	0.35
		1	0.61	0.53	0.48	0.60	0.53	0.48	0.44	0.52	0.47	0.43	0.51	0.46	0.43	0.42
		1.25	0.66	0.59	0.54	0.65	0.58	0.54	0.50	0.57	0.53	0.49	0.56	0.52	0.49	0.47
		1.5	0.69	0.63	0.59	0.68	0.63	0.58	0.55	0.61	0.57	0.54	0.60	0.56	0.54	0.52
		2	0.74	0.69	0.65	0.72	0.68	0.64	0.61	0.66	0.63	0.60	0.65	0.62	0.60	0.58
		2.5	0.76	0.72	0.68	0.75	0.71	0.68	0.65	0.69	0.67	0.64	0.68	0.65	0.63	0.61
		3	0.77	0.74	0.71	0.76	0.73	0.70	0.67	0.71	0.69	0.67	0.70	0.68	0.66	0.64
		4	0.80	0.77	0.74	0.78	0.76	0.73	0.71	0.74	0.72	0.70	0.72	0.71	0.69	0.67
		5	0.81	0.79	0.76	0.80	0.78	0.76	0.74	0.76	0.74	0.73	0.74	0.73	0.72	0.70
光源																
品名	LED電球															
形式	LDA11D-G/100C															
光束	1,520 lm															
		7	0.83	0.81	0.80	0.82	0.80	0.79	0.77	0.78	0.77	0.76	0.77	0.76	0.75	0.73
		10	0.84	0.83	0.82	0.83	0.82	0.81	0.80	0.80	0.80	0.79	0.79	0.78	0.78	0.75

器具効率 Ft=	79.1%
上方光束 Fu=	0.0%
下方光束 Fd=	79.1%
配光分類	BZ-
最大取付間隔	
A-A	1.90 H
B-B	H
保守率	良 0.63 中 0.60 否 0.53

単体照度分布(初期)

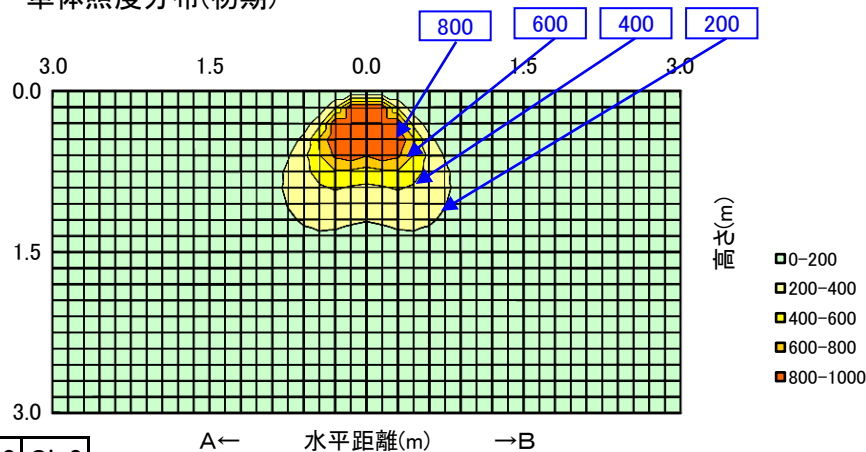

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	195				
10	218				
20	268				
30	285				
40	265				
50	205				
60	86				
70	37				
80	10				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

