


日立照明器具 照明特性

形式：LDE1030S +LDA9D-G/60HC		天井 反射率 壁 床 室指数	80%			70%				50%			30%			0%	
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														0%
			照明率 S/H=1.0														
姿図 		0.6	0.52	0.45	0.40	0.51	0.44	0.40	0.37	0.44	0.39	0.36	0.43	0.39	0.36	0.35	
		0.8	0.59	0.53	0.48	0.58	0.52	0.48	0.45	0.51	0.48	0.45	0.51	0.47	0.44	0.43	
		1	0.64	0.58	0.54	0.63	0.57	0.53	0.50	0.56	0.53	0.50	0.55	0.52	0.50	0.48	
		1.25	0.68	0.62	0.59	0.67	0.62	0.58	0.55	0.61	0.58	0.55	0.60	0.57	0.55	0.53	
		1.5	0.70	0.66	0.62	0.69	0.65	0.62	0.59	0.64	0.61	0.59	0.63	0.60	0.58	0.57	
		2	0.74	0.70	0.67	0.73	0.69	0.67	0.64	0.68	0.66	0.64	0.67	0.65	0.63	0.62	
		2.5	0.76	0.72	0.70	0.75	0.72	0.69	0.67	0.70	0.68	0.66	0.69	0.67	0.66	0.64	
		3	0.77	0.74	0.72	0.76	0.73	0.71	0.69	0.72	0.70	0.68	0.70	0.69	0.67	0.66	
光源		4	0.78	0.76	0.74	0.77	0.75	0.73	0.72	0.74	0.72	0.71	0.72	0.71	0.70	0.68	
品名	LED電球	5	0.79	0.77	0.76	0.78	0.77	0.75	0.74	0.75	0.74	0.73	0.74	0.73	0.72	0.70	
形式	LDA9D-G/60HC	7	0.81	0.79	0.78	0.80	0.79	0.78	0.77	0.77	0.76	0.75	0.76	0.75	0.74	0.72	
光束	1,000 lm	10	0.82	0.81	0.80	0.81	0.80	0.80	0.79	0.79	0.78	0.78	0.77	0.77	0.76	0.74	

器具効率 Ft= 76.3%

上方光束 Fu= 0.0%

下方光束 Fd= 76.3%

配光分類

BZ-

最大取付間隔

A-A 1.32 H

B-B H

保守率

良 0.63


中 0.60

否 0.53

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	381				
10	395				
20	385				
30	340				
40	266				
50	112				
60	55				
70	16				
80					
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

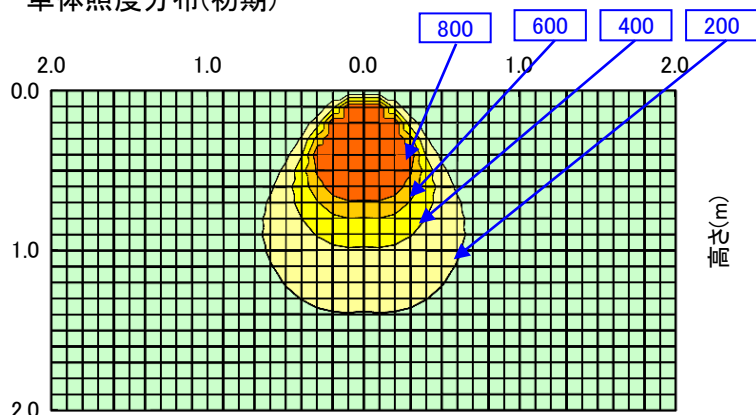

800 600 400 200

0.0 1.0 2.0

0.0 1.0 2.0

単位: (m)

0-200

200-400


400-600

600-800

800-1000

A← 水平距離(m) →B

配光曲線

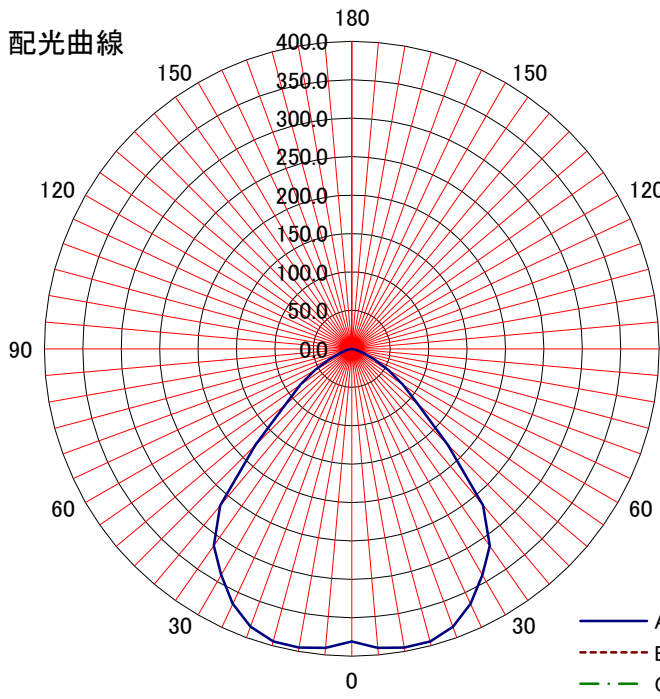

180 150 120 90 60 30 0

400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

0 30 60 90 120 150 180

A

B

C-C'