



日立照明器具 照明特性

形式：LDE1030SB +LDA11D-G/100C		反射率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.47	0.38	0.32	0.46	0.38	0.32	0.28	0.37	0.32	0.28	0.36	0.31	0.28	0.26		
		0.8	0.56	0.47	0.41	0.55	0.47	0.41	0.37	0.46	0.41	0.37	0.45	0.40	0.37	0.35		
		1	0.61	0.53	0.48	0.60	0.53	0.48	0.44	0.52	0.47	0.43	0.51	0.46	0.43	0.42		
		1.25	0.66	0.59	0.54	0.65	0.58	0.54	0.50	0.57	0.53	0.49	0.56	0.52	0.49	0.47		
		1.5	0.69	0.63	0.59	0.68	0.63	0.58	0.55	0.61	0.57	0.54	0.60	0.56	0.54	0.52		
		2	0.74	0.69	0.65	0.72	0.68	0.64	0.61	0.66	0.63	0.60	0.65	0.62	0.60	0.58		
		2.5	0.76	0.72	0.68	0.75	0.71	0.68	0.65	0.69	0.67	0.64	0.68	0.65	0.63	0.61		
		3	0.77	0.74	0.71	0.76	0.73	0.70	0.67	0.71	0.69	0.67	0.70	0.68	0.66	0.64		
光源		4	0.80	0.77	0.74	0.78	0.76	0.73	0.71	0.74	0.72	0.70	0.72	0.71	0.69	0.67		
品名	LED電球	5	0.81	0.79	0.76	0.80	0.78	0.76	0.74	0.76	0.74	0.73	0.74	0.73	0.72	0.70		
形式	LDA11D-G/100C	7	0.83	0.81	0.80	0.82	0.80	0.79	0.77	0.78	0.77	0.76	0.77	0.76	0.75	0.73		
光束	1,520 lm	10	0.84	0.83	0.82	0.83	0.82	0.81	0.80	0.80	0.80	0.79	0.79	0.78	0.78	0.75		

器具効率 Ft=	79.1%
上方光束 Fu=	0.0%
下方光束 Fd=	79.1%
配光分類	BZ-
最大取付間隔	
A-A	1.90 H
B-B	H
保守率	良 0.63 中 0.60 否 0.53

単体照度分布(初期)

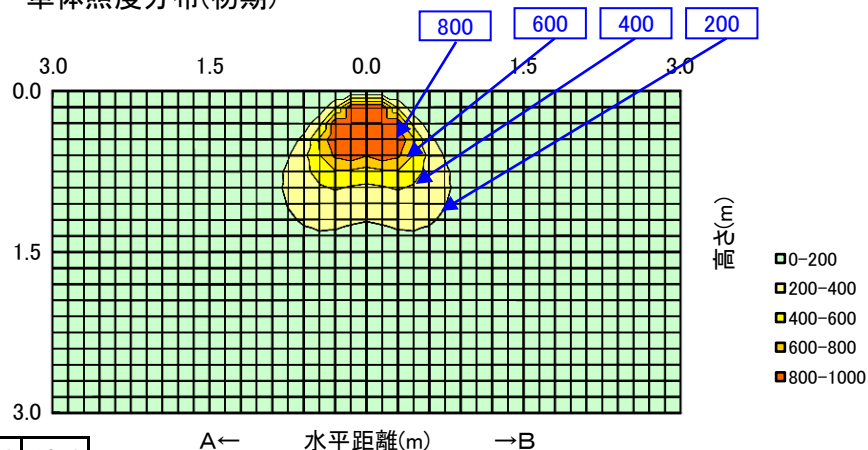

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	195				
10	218				
20	268				
30	285				
40	265				
50	205				
60	86				
70	37				
80	10				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

