


日立照明器具 照明特性

形式：LDE1030SB +LDA6D-G/40A		反射率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.52	0.45	0.40	0.51	0.44	0.40	0.37	0.44	0.39	0.36	0.43	0.39	0.36	0.35		
		0.8	0.59	0.53	0.48	0.58	0.52	0.48	0.45	0.51	0.48	0.45	0.51	0.47	0.44	0.43		
		1	0.64	0.58	0.54	0.63	0.57	0.53	0.50	0.56	0.53	0.50	0.55	0.52	0.50	0.48		
		1.25	0.68	0.62	0.59	0.67	0.62	0.58	0.55	0.61	0.58	0.55	0.60	0.57	0.55	0.53		
		1.5	0.70	0.66	0.62	0.69	0.65	0.62	0.59	0.64	0.61	0.59	0.63	0.60	0.58	0.57		
		2	0.74	0.70	0.67	0.73	0.69	0.67	0.64	0.68	0.66	0.64	0.67	0.65	0.63	0.62		
		2.5	0.76	0.72	0.70	0.75	0.72	0.69	0.67	0.70	0.68	0.66	0.69	0.67	0.66	0.64		
		3	0.77	0.74	0.72	0.76	0.73	0.71	0.69	0.72	0.70	0.68	0.70	0.69	0.67	0.66		
光 源		4	0.78	0.76	0.74	0.77	0.75	0.73	0.72	0.74	0.72	0.71	0.72	0.71	0.70	0.68		
品名	LED電球	5	0.79	0.77	0.76	0.78	0.77	0.75	0.74	0.75	0.74	0.73	0.74	0.73	0.72	0.70		
形式	LDA6D-G/40A	7	0.81	0.79	0.78	0.80	0.79	0.78	0.77	0.77	0.76	0.75	0.76	0.75	0.74	0.72		
光束	485 lm	10	0.82	0.81	0.80	0.81	0.80	0.80	0.79	0.79	0.78	0.78	0.77	0.77	0.76	0.74		

器具効率 $F_t = 76.3\%$

上方光束 $F_u = 0.0\%$

下方光束 $F_d = 76.3\%$

配光分類

BZ-

最大取付間隔

A-A 1.32 H


B-B H

保守率	良	0.63
	中	0.60
	否	0.53

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	381				
10	395				
20	385				
30	340				
40	266				
50	112				
60	55				
70	16				
80					
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

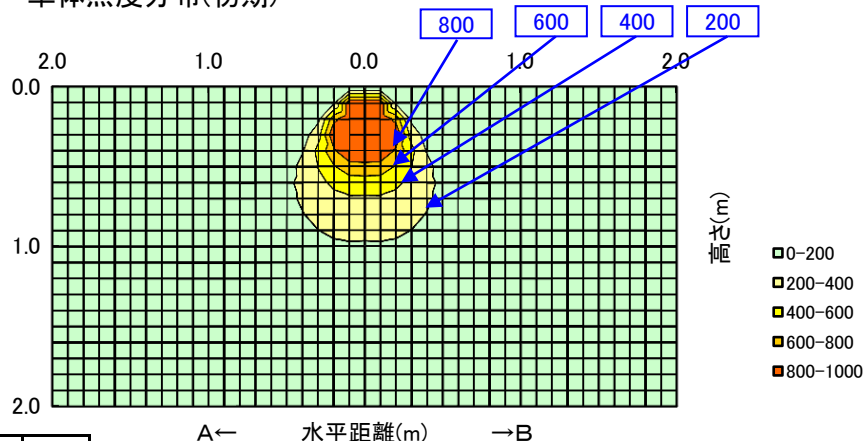

配光曲線

