
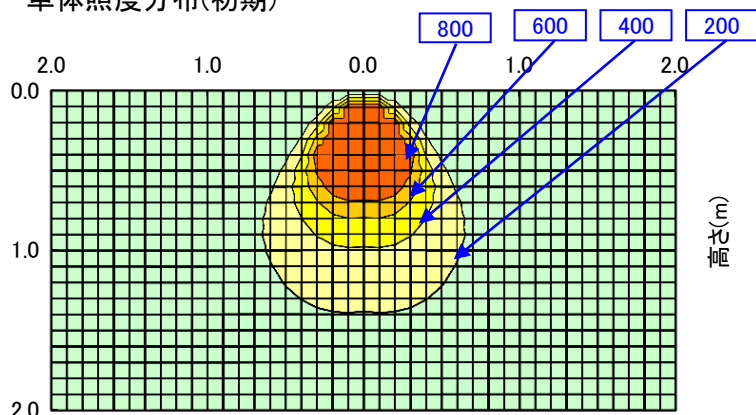
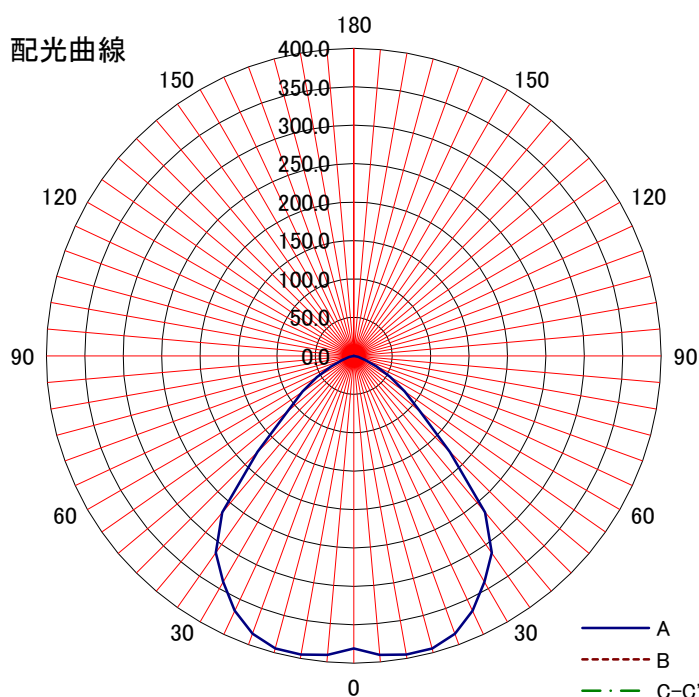


日立照明器具 照明特性

形式：LDE1030SB +LDA9D-G/60HC		天井 反射率 壁 床 室指数	80%			70%				50%			30%			0%	
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														0%
			照明率 S/H=1.0														
姿図 		0.6	0.52	0.45	0.40	0.51	0.44	0.40	0.37	0.44	0.39	0.36	0.43	0.39	0.36	0.35	
		0.8	0.59	0.53	0.48	0.58	0.52	0.48	0.45	0.51	0.48	0.45	0.51	0.47	0.44	0.43	
		1	0.64	0.58	0.54	0.63	0.57	0.53	0.50	0.56	0.53	0.50	0.55	0.52	0.50	0.48	
		1.25	0.68	0.62	0.59	0.67	0.62	0.58	0.55	0.61	0.58	0.55	0.60	0.57	0.55	0.53	
		1.5	0.70	0.66	0.62	0.69	0.65	0.62	0.59	0.64	0.61	0.59	0.63	0.60	0.58	0.57	
		2	0.74	0.70	0.67	0.73	0.69	0.67	0.64	0.68	0.66	0.64	0.67	0.65	0.63	0.62	
		2.5	0.76	0.72	0.70	0.75	0.72	0.69	0.67	0.70	0.68	0.66	0.69	0.67	0.66	0.64	
		3	0.77	0.74	0.72	0.76	0.73	0.71	0.69	0.72	0.70	0.68	0.70	0.69	0.67	0.66	
光源		4	0.78	0.76	0.74	0.77	0.75	0.73	0.72	0.74	0.72	0.71	0.72	0.71	0.70	0.68	
品名	LED電球	5	0.79	0.77	0.76	0.78	0.77	0.75	0.74	0.75	0.74	0.73	0.74	0.73	0.72	0.70	
形式	LDA9D-G/60HC	7	0.81	0.79	0.78	0.80	0.79	0.78	0.77	0.77	0.76	0.75	0.76	0.75	0.74	0.72	
光束	1,000 lm	10	0.82	0.81	0.80	0.81	0.80	0.80	0.79	0.79	0.78	0.78	0.77	0.77	0.76	0.74	
器具効率 Ft= 76.3%			単体照度分布(初期)  0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0.0%																	
下方光束 Fd= 76.3%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.32 H																	
B-B H																	
保守率	良	0.63															
	中	0.60															
	否	0.53															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0	配光曲線  A B C-C'											
0	381																
10	395																
20	385																
30	340																
40	266																
50	112																
60	55																
70	16																
80																	
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	