


日立照明器具 照明特性

形式：LDE1030W +LDA6D-G/40A		反射率	天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.43	0.34	0.29	0.42	0.34	0.29	0.25	0.33	0.29	0.25	0.33	0.28	0.25	0.24			
		0.8	0.50	0.42	0.37	0.49	0.42	0.37	0.33	0.41	0.36	0.33	0.40	0.36	0.33	0.31			
		1	0.55	0.48	0.42	0.54	0.47	0.42	0.38	0.46	0.42	0.38	0.45	0.41	0.38	0.37			
		1.25	0.59	0.52	0.48	0.58	0.52	0.47	0.44	0.51	0.47	0.44	0.49	0.46	0.43	0.42			
		1.5	0.62	0.56	0.52	0.61	0.56	0.51	0.48	0.54	0.51	0.48	0.53	0.50	0.47	0.46			
		2	0.66	0.61	0.57	0.65	0.60	0.57	0.54	0.59	0.56	0.53	0.58	0.55	0.53	0.51			
		2.5	0.68	0.64	0.61	0.67	0.63	0.60	0.58	0.62	0.59	0.57	0.60	0.58	0.56	0.54			
		3	0.69	0.66	0.63	0.68	0.65	0.62	0.60	0.64	0.61	0.59	0.62	0.60	0.59	0.57			
光源		4	0.71	0.69	0.66	0.70	0.68	0.66	0.64	0.66	0.64	0.63	0.65	0.63	0.62	0.60			
品名	LED電球	5	0.73	0.70	0.68	0.72	0.70	0.68	0.66	0.68	0.67	0.65	0.67	0.65	0.64	0.62			
形式	LDA6D-G/40A	7	0.74	0.73	0.71	0.73	0.72	0.71	0.69	0.70	0.69	0.68	0.69	0.68	0.67	0.65			
光束	485 lm	10	0.76	0.75	0.74	0.75	0.74	0.73	0.72	0.72	0.71	0.71	0.71	0.70	0.69	0.67			

器具効率 $F_t = 71.3\%$

上方光束 $F_u = 0.0\%$

下方光束 $F_d = 71.3\%$

配光分類

BZ-

最大取付間隔

A-A 1.36 H


B-B H

保守率	良	中	否
	0.63	0.60	0.53

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	258				
10	256				
20	246				
30	230				
40	213				
50	161				
60	99				
70	47				
80	13				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期)

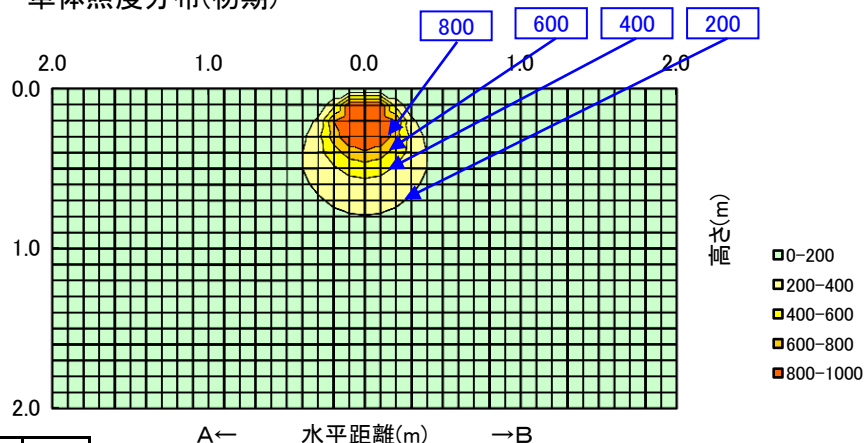

配光曲線

