
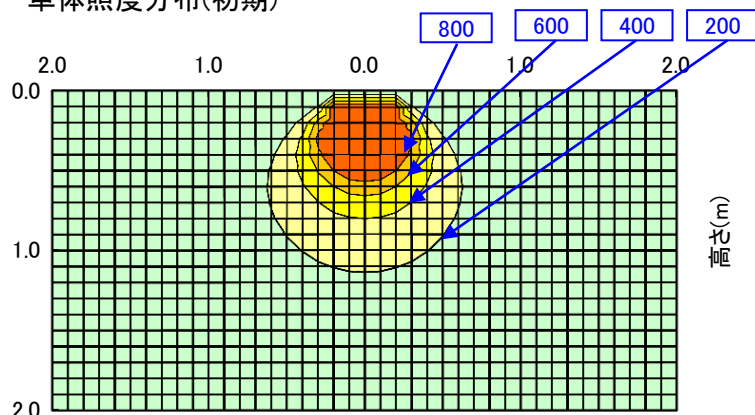
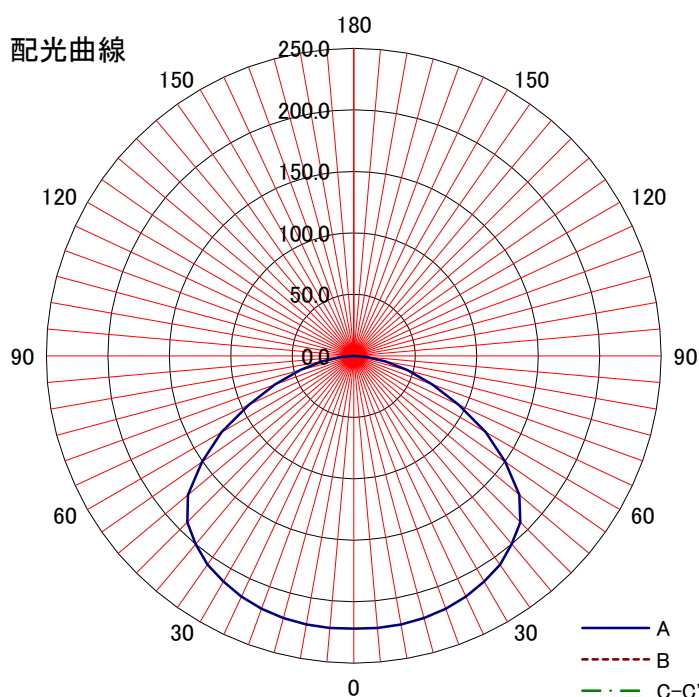


日立照明器具 照明特性

形式: LDE1030WB +LDA10D-G/80C		天井 反射率 壁 床 室指数	80%			70%				50%			30%			0%	
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														0%
			照明率 S/H=1.0														
姿図 		0.6	0.43	0.33	0.27	0.42	0.33	0.27	0.23	0.32	0.27	0.23	0.31	0.27	0.23	0.22	
		0.8	0.50	0.41	0.35	0.49	0.41	0.35	0.31	0.40	0.35	0.31	0.39	0.34	0.31	0.29	
		1	0.55	0.47	0.41	0.54	0.46	0.41	0.37	0.45	0.40	0.36	0.44	0.40	0.36	0.34	
		1.25	0.60	0.52	0.47	0.58	0.52	0.46	0.42	0.50	0.46	0.42	0.49	0.45	0.42	0.40	
		1.5	0.63	0.57	0.51	0.62	0.56	0.51	0.47	0.54	0.50	0.47	0.53	0.49	0.46	0.44	
		2	0.67	0.62	0.58	0.66	0.61	0.57	0.54	0.60	0.56	0.53	0.58	0.55	0.52	0.51	
		2.5	0.70	0.65	0.61	0.69	0.65	0.61	0.58	0.63	0.60	0.57	0.61	0.59	0.56	0.54	
		3	0.72	0.68	0.64	0.71	0.67	0.64	0.61	0.65	0.62	0.60	0.64	0.61	0.59	0.57	
光源		4	0.74	0.71	0.68	0.73	0.70	0.67	0.65	0.68	0.66	0.64	0.67	0.65	0.63	0.61	
品名	LED電球	5	0.76	0.73	0.70	0.74	0.72	0.70	0.68	0.70	0.68	0.67	0.69	0.67	0.66	0.64	
形式	LDA10D-G/80C	7	0.77	0.75	0.74	0.76	0.75	0.73	0.71	0.73	0.72	0.70	0.71	0.70	0.69	0.67	
光束	1,160 lm	10	0.79	0.78	0.76	0.78	0.77	0.75	0.74	0.75	0.74	0.73	0.73	0.73	0.72	0.70	
器具効率 Ft= 74.9%			単体照度分布(初期)  2.0 1.0 0.0 1.0 2.0 0.0 1.0 2.0 0.0 1.0 2.0 2.0 A← 水平距離(m) →B (m) 距離 0-200 200-400 400-600 600-800 800-1000														
上方光束 Fu= 0.0%																	
下方光束 Fd= 74.9%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.44 H																	
B-B H																	
保守率	良	0.63															
	中	0.60															
	否	0.53															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0	配光曲線  180 150 150 120 120 90 90 60 60 30 30 0 250.0 200.0 150.0 100.0 50.0 0.0 A B C-C'											
0	222																
10	222																
20	219																
30	212																
40	200																
50	176																
60	124																
70	68																
80	26																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	