



日立照明器具 照明特性

形式: LDE1030WB +LDA7D-G/60A	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
	室指数		照明率 S/H=1.0													
姿図 	0.6		0.43	0.34	0.29	0.42	0.34	0.29	0.25	0.33	0.29	0.25	0.33	0.28	0.25	0.24
	0.8		0.50	0.42	0.37	0.49	0.42	0.37	0.33	0.41	0.36	0.33	0.40	0.36	0.33	0.31
	1		0.55	0.48	0.42	0.54	0.47	0.42	0.38	0.46	0.42	0.38	0.45	0.41	0.38	0.37
	1.25		0.59	0.52	0.48	0.58	0.52	0.47	0.44	0.51	0.47	0.44	0.49	0.46	0.43	0.42
	1.5		0.62	0.56	0.52	0.61	0.56	0.51	0.48	0.54	0.51	0.48	0.53	0.50	0.47	0.46
	2		0.66	0.61	0.57	0.65	0.60	0.57	0.54	0.59	0.56	0.53	0.58	0.55	0.53	0.51
	2.5		0.68	0.64	0.61	0.67	0.63	0.60	0.58	0.62	0.59	0.57	0.60	0.58	0.56	0.54
	3		0.69	0.66	0.63	0.68	0.65	0.62	0.60	0.64	0.61	0.59	0.62	0.60	0.59	0.57
	4		0.71	0.69	0.66	0.70	0.68	0.66	0.64	0.66	0.64	0.63	0.65	0.63	0.62	0.60
	5		0.73	0.70	0.68	0.72	0.70	0.68	0.66	0.68	0.67	0.65	0.67	0.65	0.64	0.62
光源	4		0.71	0.69	0.66	0.70	0.68	0.66	0.64	0.66	0.64	0.63	0.65	0.63	0.62	0.60
品名 LED電球	5		0.73	0.70	0.68	0.72	0.70	0.68	0.66	0.68	0.67	0.65	0.67	0.65	0.64	0.62
形式 LDA7D-G/60A	7		0.74	0.73	0.71	0.73	0.72	0.71	0.69	0.70	0.69	0.68	0.69	0.68	0.67	0.65
光束 810 lm	10		0.76	0.75	0.74	0.75	0.74	0.73	0.72	0.72	0.71	0.71	0.71	0.70	0.69	0.67

器具効率 Ft=	71.3%
上方光束 Fu=	0.0%
下方光束 Fd=	71.3%
配光分類	BZ-
最大取付間隔	
A-A	1.36 H
B-B	H
保守率	良 0.63 中 0.60 否 0.53

単体照度分布(初期)

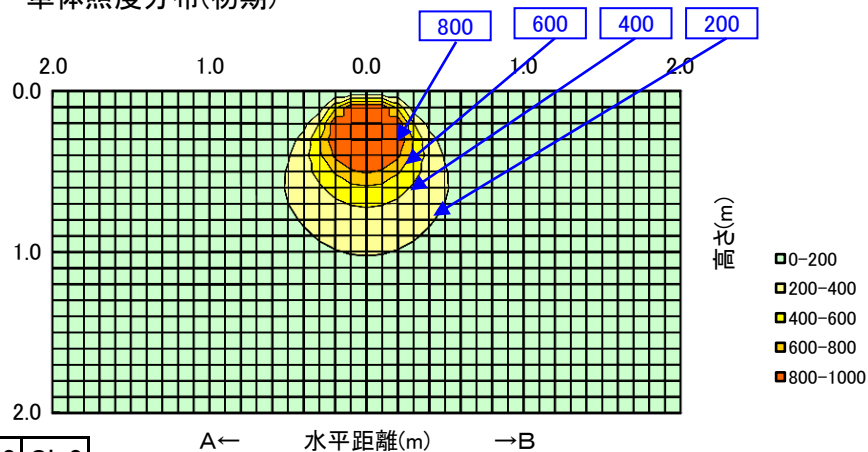

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	258				
10	256				
20	246				
30	230				
40	213				
50	161				
60	99				
70	47				
80	13				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

