



日立照明器具 照明特性

形式: LDE1030WB +LDA7D-G/60E	反射率	天井	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													
			照明率 S/H=1.0													
姿図 	室指数	0.6	0.43	0.34	0.29	0.42	0.34	0.29	0.25	0.33	0.29	0.25	0.33	0.28	0.25	0.24
		0.8	0.50	0.42	0.37	0.49	0.42	0.37	0.33	0.41	0.36	0.33	0.40	0.36	0.33	0.31
		1	0.55	0.48	0.42	0.54	0.47	0.42	0.38	0.46	0.42	0.38	0.45	0.41	0.38	0.37
		1.25	0.59	0.52	0.48	0.58	0.52	0.47	0.44	0.51	0.47	0.44	0.49	0.46	0.43	0.42
		1.5	0.62	0.56	0.52	0.61	0.56	0.51	0.48	0.54	0.51	0.48	0.53	0.50	0.47	0.46
		2	0.66	0.61	0.57	0.65	0.60	0.57	0.54	0.59	0.56	0.53	0.58	0.55	0.53	0.51
		2.5	0.68	0.64	0.61	0.67	0.63	0.60	0.58	0.62	0.59	0.57	0.60	0.58	0.56	0.54
		3	0.69	0.66	0.63	0.68	0.65	0.62	0.60	0.64	0.61	0.59	0.62	0.60	0.59	0.57
		4	0.71	0.69	0.66	0.70	0.68	0.66	0.64	0.66	0.64	0.63	0.65	0.63	0.62	0.60
		5	0.73	0.70	0.68	0.72	0.70	0.68	0.66	0.68	0.67	0.65	0.67	0.65	0.64	0.62
光源		4	0.71	0.69	0.66	0.70	0.68	0.66	0.64	0.66	0.64	0.63	0.65	0.63	0.62	0.60
品名 LED電球		5	0.73	0.70	0.68	0.72	0.70	0.68	0.66	0.68	0.67	0.65	0.67	0.65	0.64	0.62
形式 LDA7D-G/60E		7	0.74	0.73	0.71	0.73	0.72	0.71	0.69	0.70	0.69	0.68	0.69	0.68	0.67	0.65
光束 810 lm		10	0.76	0.75	0.74	0.75	0.74	0.73	0.72	0.72	0.71	0.71	0.71	0.70	0.69	0.67

器具効率 Ft=	71.3%
上方光束 Fu=	0.0%
下方光束 Fd=	71.3%
配光分類	BZ-
最大取付間隔	
A-A	1.36 H
B-B	H
保守率	良 0.63 中 0.60 否 0.53

単体照度分布(初期)

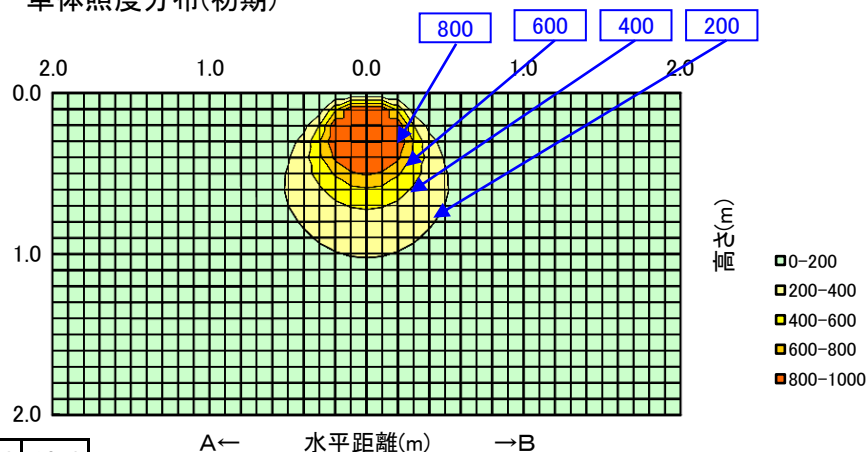

光度 (cd/1000 lm)	A-0	B-B	C-0	A'-0	C'-0
0	258				
10	256				
20	246				
30	230				
40	213				
50	161				
60	99				
70	47				
80	13				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

