
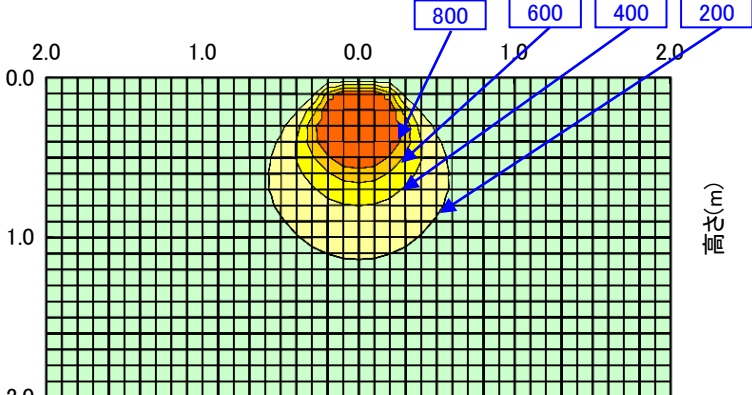
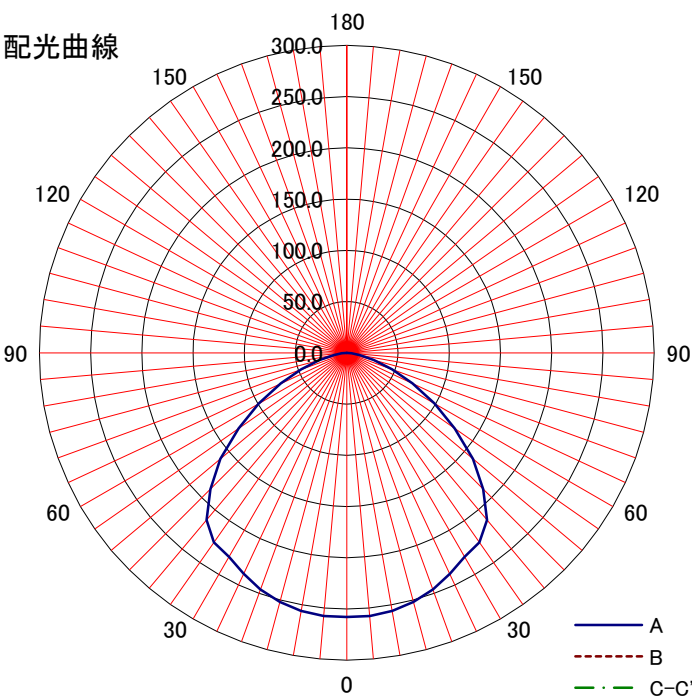


日立照明器具 照明特性

形式: LDE1030WB +LDA9D-G/60HC		天井 反射率 壁 床 室指数	80%			70%				50%			30%			0%	
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														0%
			照明率 S/H=1.0														
姿図 	0.6	0.43	0.34	0.29	0.42	0.34	0.29	0.25	0.33	0.29	0.25	0.33	0.28	0.25	0.24		
	0.8	0.50	0.42	0.37	0.49	0.42	0.37	0.33	0.41	0.36	0.33	0.40	0.36	0.33	0.31		
	1	0.55	0.48	0.42	0.54	0.47	0.42	0.38	0.46	0.42	0.38	0.45	0.41	0.38	0.37		
	1.25	0.59	0.52	0.48	0.58	0.52	0.47	0.44	0.51	0.47	0.44	0.49	0.46	0.43	0.42		
	1.5	0.62	0.56	0.52	0.61	0.56	0.51	0.48	0.54	0.51	0.48	0.53	0.50	0.47	0.46		
	2	0.66	0.61	0.57	0.65	0.60	0.57	0.54	0.59	0.56	0.53	0.58	0.55	0.53	0.51		
	2.5	0.68	0.64	0.61	0.67	0.63	0.60	0.58	0.62	0.59	0.57	0.60	0.58	0.56	0.54		
	3	0.69	0.66	0.63	0.68	0.65	0.62	0.60	0.64	0.61	0.59	0.62	0.60	0.59	0.57		
光源	4	0.71	0.69	0.66	0.70	0.68	0.66	0.64	0.66	0.64	0.63	0.65	0.63	0.62	0.60		
品名	LED電球	5	0.73	0.70	0.68	0.72	0.70	0.68	0.66	0.68	0.67	0.65	0.67	0.65	0.64	0.62	
形式	LDA9D-G/60HC	7	0.74	0.73	0.71	0.73	0.72	0.71	0.69	0.70	0.69	0.68	0.69	0.68	0.67	0.65	
光束	1,000 lm	10	0.76	0.75	0.74	0.75	0.74	0.73	0.72	0.72	0.71	0.71	0.71	0.70	0.69	0.67	
器具効率 Ft= 71.3%		単体照度分布(初期)  800 600 400 200 2.0 1.0 0.0 1.0 2.0 0.0 1.0 2.0 水平距離(m) 0-200 200-400 400-600 600-800 800-1000															
上方光束 Fu= 0.0%																	
下方光束 Fd= 71.3%																	
配光分類																	
BZ-																	
最大取付間隔																	
A-A 1.36 H																	
B-B H																	
保守率	良																0.63
	中																0.60
	否																0.53
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0	配光曲線  180 300.0 150 150 120 120 90 90 60 60 30 30 0 0.0 50.0 100.0 150.0 200.0 250.0 300.0 A B C-C'											
0	258																
10	256																
20	246																
30	230																
40	213																
50	161																
60	99																
70	47																
80	13																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	