



日立照明器具 照明特性

形式：NE4201N-J14A <定格出力タイプ> <初期照度補正形>		反 射 率	天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
姿図 		0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.40	0.34	0.30	0.27		
		0.8	0.65	0.54	0.46	0.64	0.53	0.45	0.40	0.51	0.44	0.39	0.49	0.43	0.38	0.36		
		1	0.72	0.61	0.53	0.70	0.60	0.52	0.47	0.57	0.51	0.46	0.55	0.49	0.45	0.42		
		1.25	0.78	0.68	0.60	0.75	0.66	0.59	0.54	0.64	0.57	0.53	0.61	0.56	0.51	0.48		
		1.5	0.82	0.73	0.66	0.80	0.71	0.65	0.59	0.69	0.63	0.58	0.66	0.61	0.57	0.54		
		2	0.88	0.80	0.74	0.85	0.78	0.72	0.68	0.75	0.70	0.66	0.72	0.68	0.64	0.61		
		2.5	0.91	0.84	0.79	0.89	0.83	0.77	0.73	0.79	0.75	0.71	0.76	0.73	0.69	0.66		
		3	0.93	0.87	0.82	0.91	0.86	0.81	0.77	0.82	0.78	0.75	0.79	0.76	0.73	0.69		
		光源		4	0.96	0.92	0.87	0.94	0.90	0.86	0.82	0.86	0.83	0.80	0.83	0.80	0.78	0.74
品名	LED	5	0.98	0.94	0.91	0.96	0.93	0.89	0.86	0.89	0.86	0.84	0.86	0.84	0.81	0.77		
形式	-	7	1.01	0.98	0.95	0.99	0.96	0.94	0.91	0.93	0.91	0.89	0.89	0.88	0.86	0.82		
器具光束	5,500 lm	10	1.03	1.01	0.99	1.01	0.99	0.97	0.96	0.96	0.94	0.93	0.92	0.91	0.90	0.85		

器具効率 Ft= 100.0%		
上方光束 Fu= 6.1%		
下方光束 Fd= 93.9%		
配光分類		
BZ-		
最大取付間隔		
A-A	1.30	H
B-B	1.30	H
保守率	良	0.88
	中	0.86
	否	0.81

単体照度分布(初期)

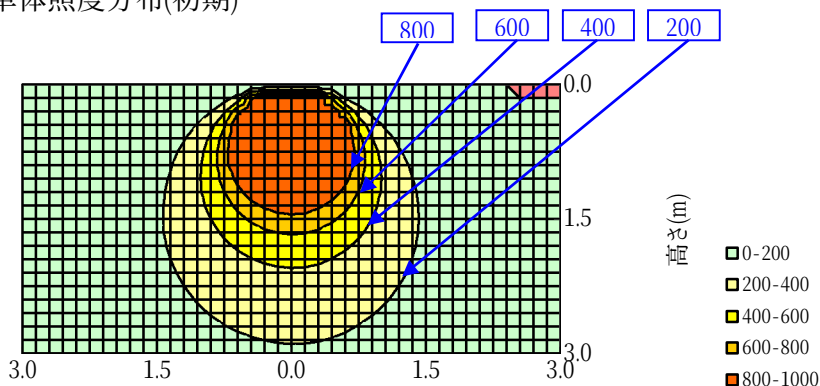

光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	303	303	303		
10	298	300	299		
20	285	285	285		
30	262	262	259		
40	230	227	229		
50	189	185	187		
60	151	137	141		
70	110	87	101		
80	62	33	53		
90	41	3	27		
100	24	3	14		
110	14	3	8		
120	10	4	8		
130	9	5	7		
140	9	5	7		
150	8	6	7		
160	8	6	6		
170	7	7	7		
180					

