



日立照明器具 照明特性

名称: 高天井LED器具		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%												
形式: MTE0903MN(A) (W(S)MTE0903MN(A))		室指数	照明率 S/H=1.0														
<備考> 水銀ランプ250クラス (ビームの開き角:90°)			0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.44	0.53	0.48	0.44	0.53	0.47	0.43	0.42
		0.8	0.75	0.66	0.59	0.74	0.65	0.59	0.55	0.64	0.59	0.55	0.63	0.58	0.54	0.53	
		1	0.82	0.73	0.67	0.80	0.72	0.67	0.62	0.71	0.66	0.62	0.70	0.65	0.62	0.60	
		1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.69	0.77	0.73	0.69	0.76	0.72	0.69	0.67	
		1.5	0.91	0.84	0.79	0.89	0.83	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72	
		2	0.95	0.90	0.86	0.94	0.89	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.81	0.79	
		2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.87	0.84	0.82	
		3	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.85	
		4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.88	
品名: LED		5	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90	
形式: -		7	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94	
光束: 8,880 lm		10	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96	

器具効率 Ft: 100.0%					
上方光束 Fu: 0.0%					
下方光束 Fd: 100.0%					
最大取付間隔					
A-A		1.40 H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	374				
10	420				
20	496				
30	380				
40	296				
50	233				
60	107				
70	11				
80	1				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

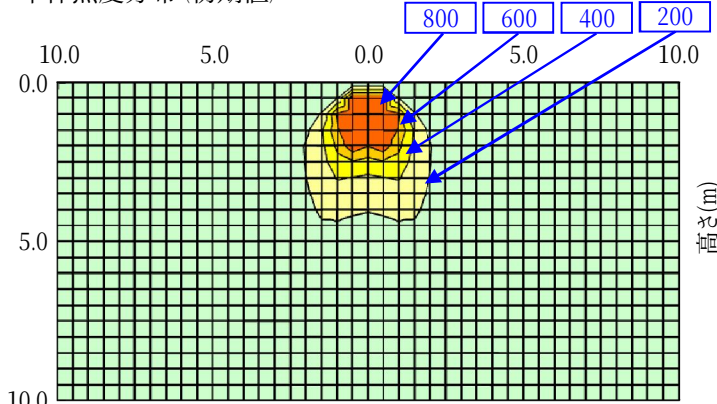


単位: 照度 (lx)

水平距離 (m)

高さ (m)

配光曲線 (cd/1000 lm)

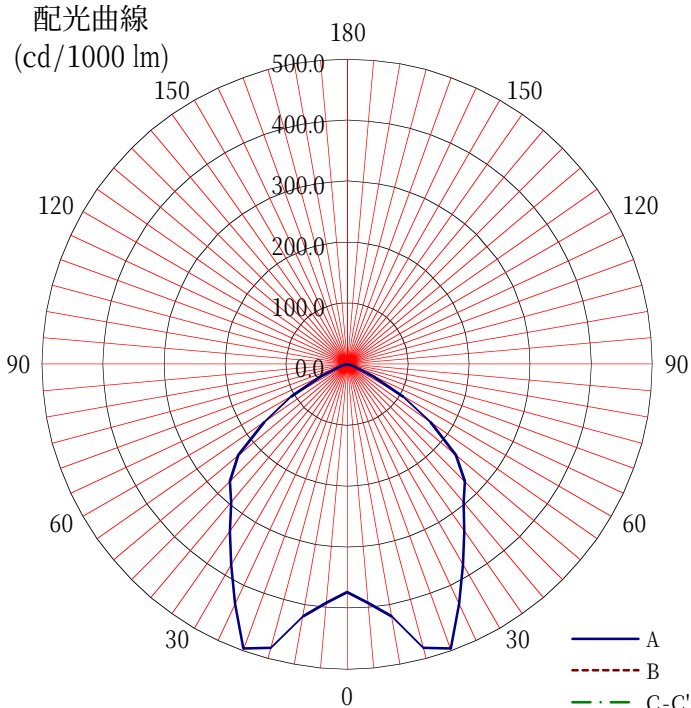

単位: 照度 (lx)

角度 (°)