


日立照明器具 照明特性

名称: 高天井LED器具		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: MTE0903NN(A) (W(S)MTE0903NN(A))		床	10%														
			照明率 S/H=1.0														
<備考> 水銀ランプ250ワス (ビームの開き角:60°)		室指数	0.6	0.80	0.73	0.69	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64
			0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.72
姿図 		1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.84	0.81	0.79	0.83	0.81	0.78	0.77	
		1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.88	0.85	0.83	0.87	0.85	0.83	0.81	
		1.5	0.98	0.93	0.90	0.97	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.84	
		2	1.01	0.97	0.94	0.99	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88	
		2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.94	0.92	0.90	
		3	1.03	1.00	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91	
光源		4	1.04	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.97	0.95	0.93	
		5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95	
品名	LED	7	1.07	1.06	1.04	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.97	
形式	-	10	1.08	1.07	1.06	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.01	0.99	
光束	9,300 lm																

器具効率 Ft= 100.0%

上方光束 Fu= 0.0%

下方光束 Fd= 100.0%

最大取付間隔

A-A 0.94 H

B-B H

保守率

良 0.81


中 0.79

否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	941				
10	940				
20	764				
30	496				
40	225				
50	77				
60	17				
70	5				
80	2				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

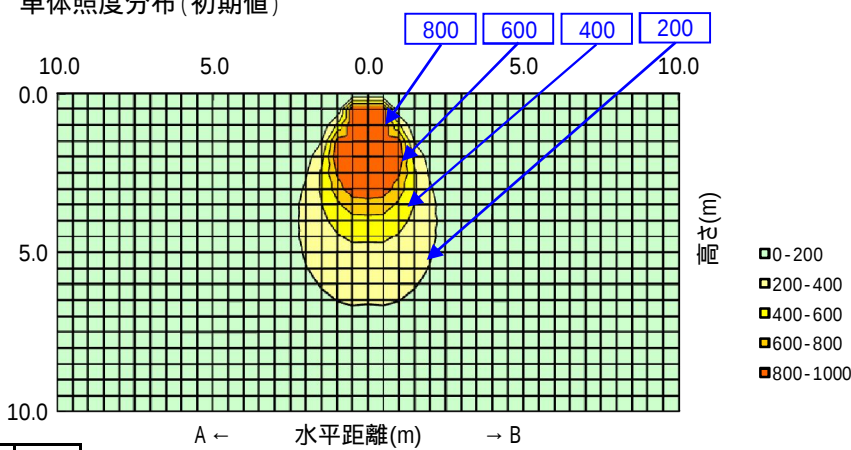

配光曲線 (cd/1000 lm)

