


日立照明器具 照明特性

名称: 高天井LED器具		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%												
形式: MTE1403MN(A) (W(S)MTE1403MN(A))		室指数	照明率 S/H=1.0														
<備考> 水銀ランプ400ワス (ビームの開き角:90°)			0.6	0.65	0.55	0.49	0.64	0.55	0.48	0.44	0.54	0.48	0.44	0.53	0.48	0.44	0.42
		0.8	0.75	0.66	0.60	0.74	0.66	0.59	0.55	0.64	0.59	0.55	0.63	0.58	0.55	0.53	
		1	0.82	0.73	0.67	0.80	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.66	0.62	0.60	
		1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.77	0.73	0.69	0.76	0.72	0.69	0.67	
		1.5	0.91	0.85	0.80	0.90	0.84	0.79	0.75	0.82	0.78	0.75	0.81	0.77	0.74	0.72	
		2	0.96	0.91	0.86	0.94	0.90	0.86	0.82	0.88	0.84	0.82	0.86	0.83	0.81	0.79	
		2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.86	0.89	0.87	0.85	0.82	
		3	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.85	
		4	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
品名: LED		5	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91	
形式: -		7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94	
光束: 13,090 lm		10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97	

器具効率 Ft= 100.0%

上方光束 Fu= 0.0%

下方光束 Fd= 100.0%

最大取付間隔

A-A 1.40 H

B-B H

保守率

良 0.81


中 0.79

否 0.75

光度 (cd/1000 lm)


	A-0	B-B	C-0	A'-0	C'-0
0	386				
10	419				
20	498				
30	386				
40	304				
50	223				
60	104				
70	15				
80	1				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

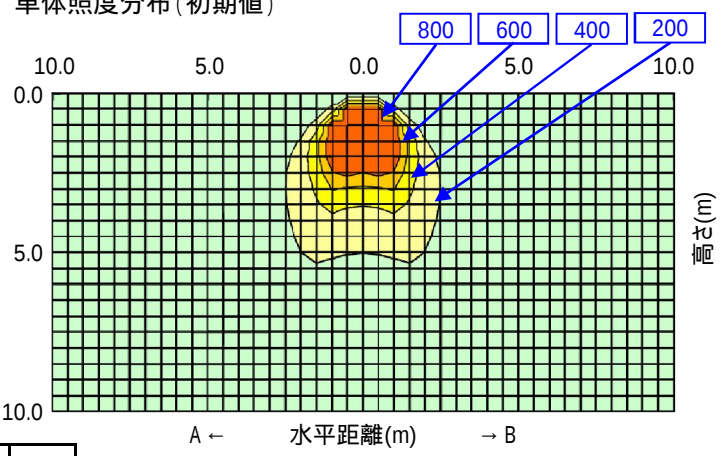


0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

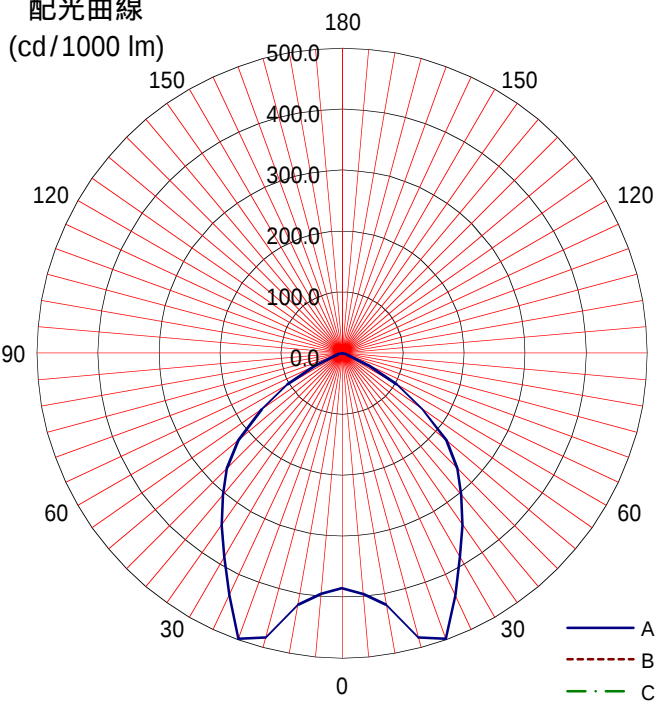

A
B
C-C'

単体照度分布 (初期値)

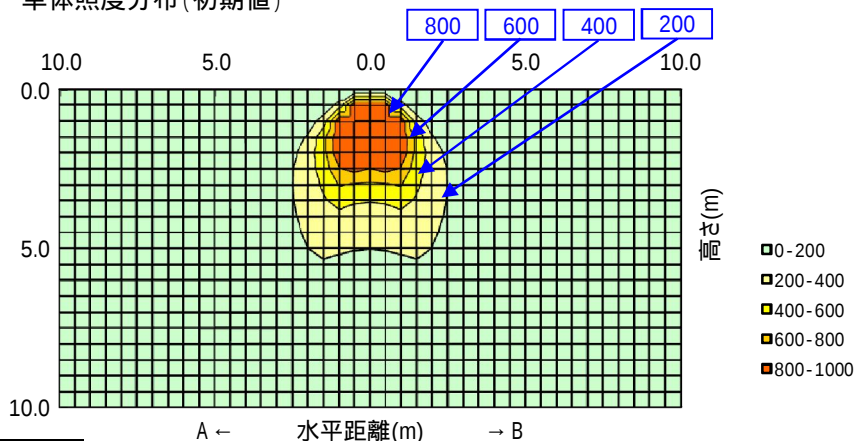

配光曲線 (cd/1000 lm)

