



日立照明器具 照明特性

名称: 高天井LED器具		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%												
形式: MTE1403WN(A)		室指数		照明率 S/H=1.0													
<備考> 水銀ランプ250クラス (ビームの開き角:110°)		0.6	0.60	0.49	0.41	0.59	0.48	0.41	0.36	0.47	0.40	0.36	0.46	0.40	0.36	0.34	
		0.8	0.70	0.60	0.52	0.69	0.59	0.52	0.47	0.58	0.51	0.47	0.56	0.51	0.46	0.44	
		1	0.77	0.67	0.60	0.76	0.66	0.60	0.55	0.65	0.59	0.54	0.63	0.58	0.54	0.52	
		1.25	0.83	0.74	0.68	0.82	0.73	0.67	0.62	0.72	0.66	0.62	0.70	0.65	0.61	0.59	
		1.5	0.87	0.80	0.74	0.86	0.79	0.73	0.69	0.77	0.72	0.68	0.75	0.71	0.67	0.65	
姿図 		2	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73	
		2.5	0.96	0.91	0.86	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78	
		3	0.98	0.93	0.89	0.97	0.92	0.89	0.85	0.90	0.87	0.84	0.88	0.86	0.83	0.81	
		4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.85	
		5	1.03	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
品名 LED		7	1.05	1.03	1.01	1.03	1.02	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
形式 -		10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.95	
光束 13,090 lm																	

器具効率 Ft= 100.0%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
最大取付間隔					
A-A		1.34 H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	366				
10	362				
20	349				
30	325				
40	292				
50	234				
60	158				
70	60				
80	4				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

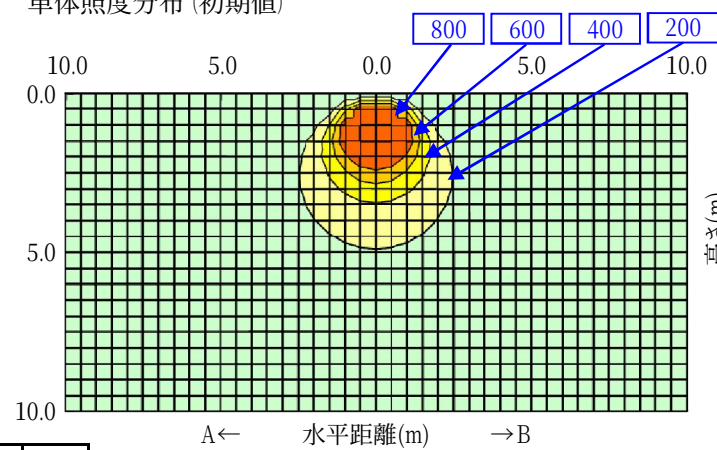

10.0 5.0 0.0 5.0 10.0


0.0 5.0 10.0

高さ(m)

0-200
200-400
400-600
600-800
800-1000

A← 水平距離(m) →B

配光曲線 (cd/1000 lm)

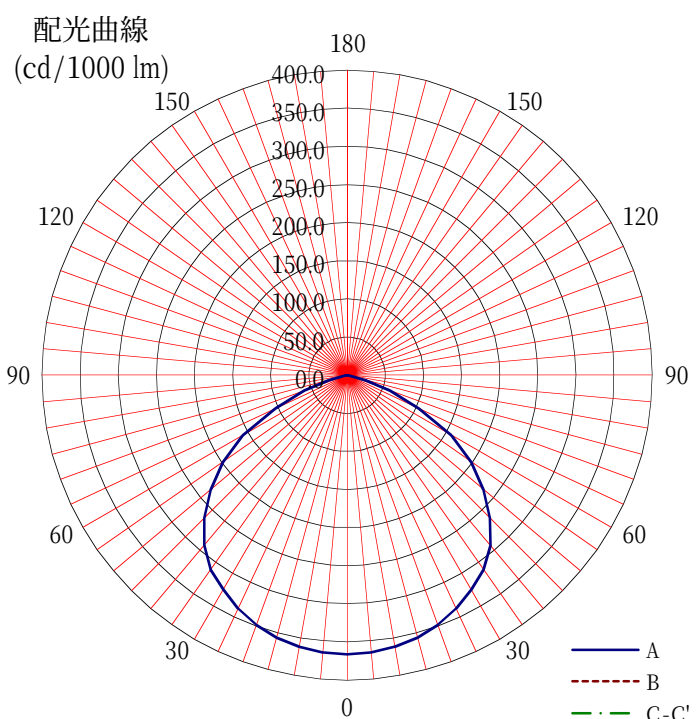

180 150 120 90 60 30 0

400.0 350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0

A
B
C-C'