


日立照明器具 照明特性

名称: 高天井LED器具		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				床	10%												
形式: MTE2803NN(A) (W(S)MTE2803NN(A))		室指数	照明率 S/H=1.0														
<備考> 水銀ランプ700クラス (ビームの開き角:60°)			0.6	0.79	0.72	0.68	0.79	0.72	0.68	0.65	0.71	0.67	0.65	0.71	0.67	0.65	0.63
姿図 		0.8	0.87	0.81	0.77	0.86	0.80	0.76	0.73	0.79	0.76	0.73	0.79	0.75	0.73	0.72	
		1	0.91	0.86	0.82	0.90	0.85	0.81	0.79	0.84	0.81	0.78	0.83	0.80	0.78	0.77	
		1.25	0.95	0.90	0.86	0.94	0.89	0.86	0.83	0.88	0.85	0.83	0.87	0.84	0.82	0.81	
		1.5	0.97	0.93	0.90	0.96	0.92	0.89	0.87	0.91	0.88	0.86	0.90	0.87	0.86	0.84	
		2	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.95	0.92	0.91	0.93	0.91	0.90	0.88	
		2.5	1.02	0.99	0.96	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.95	0.93	0.92	0.90	
		3	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.96	0.94	0.96	0.94	0.93	0.91	
		4	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.93	
品名	LED	5	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.98	0.97	0.94	
形式	-	7	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	1.00	0.99	0.96	
光束	28,000 lm	10	1.07	1.07	1.06	1.06	1.06	1.05	1.04	1.04	1.03	1.03	1.02	1.01	1.01	0.98	

器具効率 Ft: 100.0%

上方光束 Fu: 0.0%

下方光束 Fd: 100.0%

最大取付間隔

A-A0.96H

B-BH

保守率

良0.81


中0.79

否0.75


光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	926				
10	896				
20	765				
30	500				
40	241				
50	68				
60	16				
70	5				
80	1				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					


単体照度分布 (初期値)

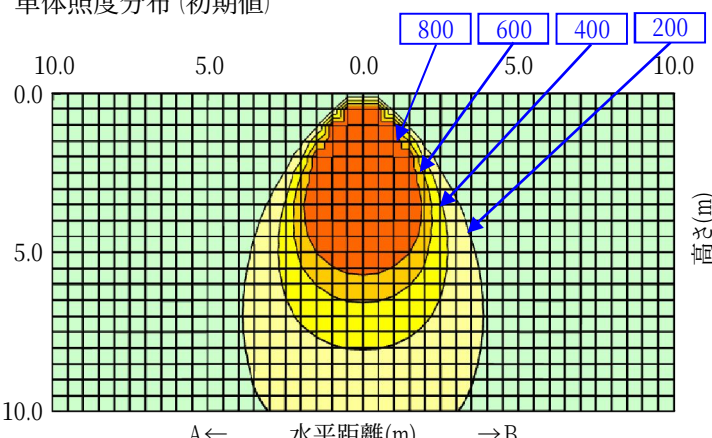

配光曲線 (cd/1000 lm)

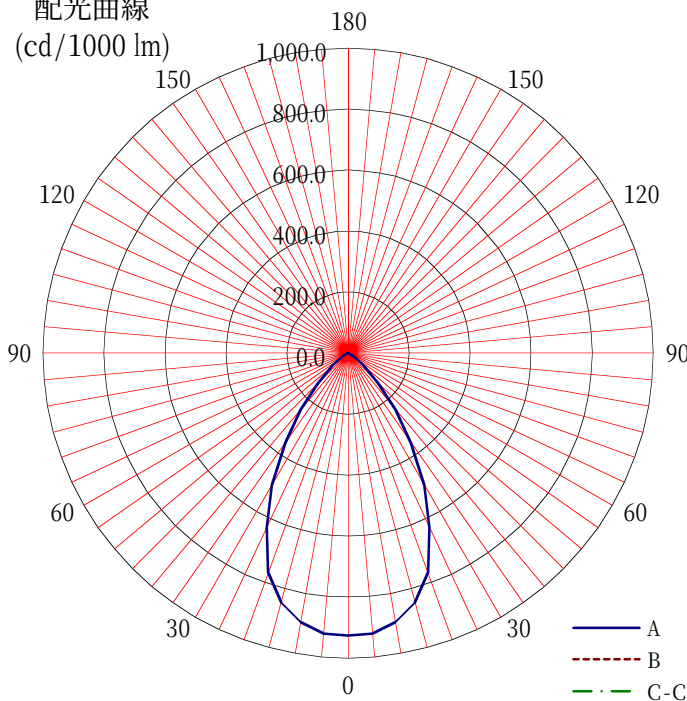

単体照度分布 (初期値)

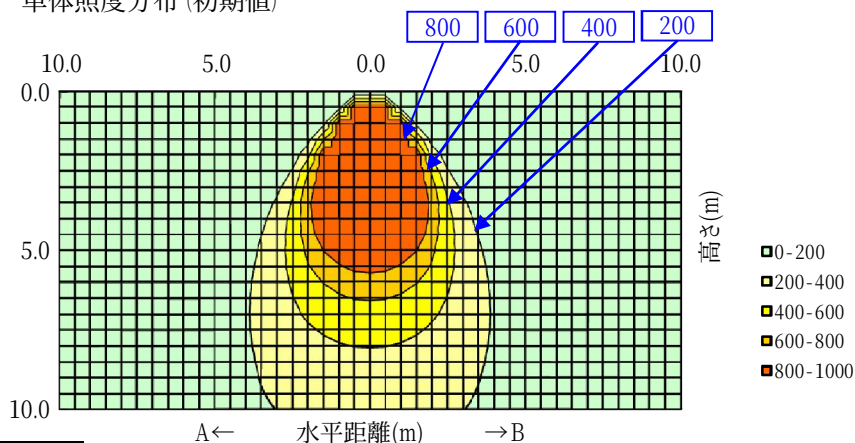

配光曲線
(cd/1000 lm)

