
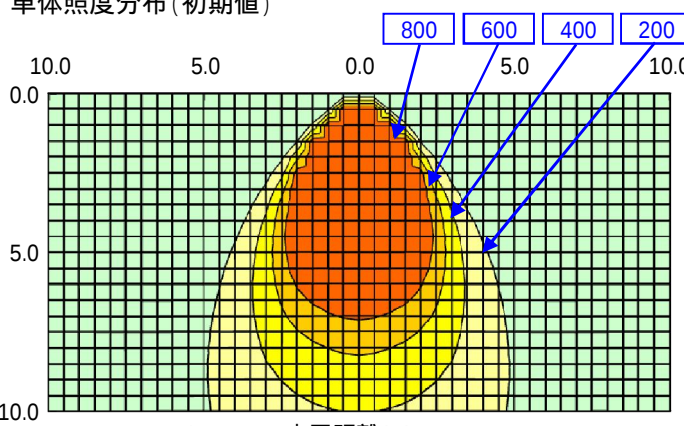
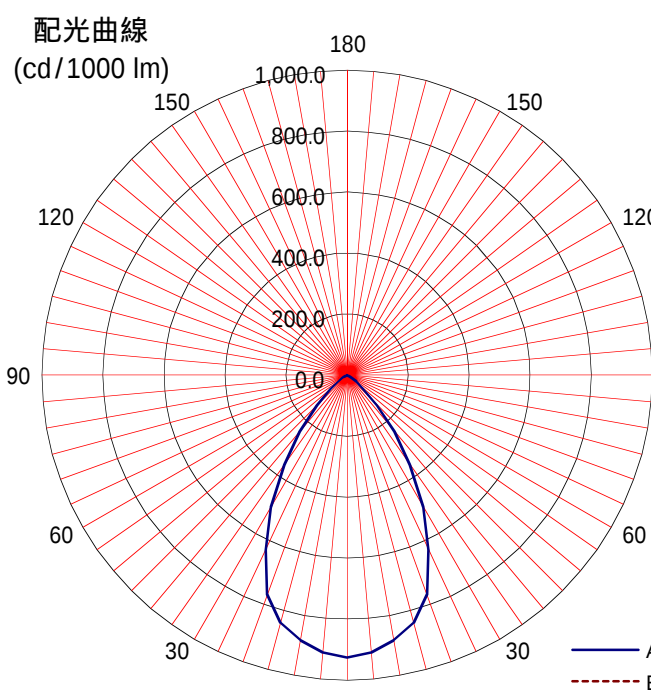


日立照明器具 照明特性

名称: 高天井LED器具		天井	80%			70%				50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式: MTE4401NN(A)		床	10%															0%	
			照明率 S/H=1.0																
<備考> MTLハイトランプ1000クラス (ビームの開き角:60°)			0.6	0.79	0.72	0.68	0.78	0.72	0.68	0.65	0.71	0.67	0.64	0.70	0.67	0.64	0.63		
			0.8	0.87	0.81	0.76	0.86	0.80	0.76	0.73	0.79	0.76	0.73	0.78	0.75	0.73	0.71		
姿図 		1	0.91	0.86	0.82	0.90	0.85	0.81	0.78	0.84	0.81	0.78	0.83	0.80	0.78	0.76			
		1.25	0.94	0.90	0.86	0.93	0.89	0.86	0.83	0.88	0.85	0.83	0.87	0.84	0.82	0.81			
		1.5	0.97	0.93	0.90	0.96	0.92	0.89	0.87	0.91	0.88	0.86	0.90	0.87	0.85	0.84			
		2	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.93	0.91	0.90	0.88			
		2.5	1.02	0.99	0.96	1.00	0.98	0.96	0.94	0.96	0.94	0.93	0.95	0.93	0.92	0.90			
		3	1.02	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.96	0.94	0.96	0.94	0.93	0.91			
		4	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.93			
光源		5	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.97	0.94			
品名 LED		7	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96			
形式 -		10	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.03	1.01	1.01	1.01	0.98			
光束 43,800 lm																			
器具効率 Ft= 100.0%			単体照度分布 (初期値) 																
上方光束 Fu= 0.0%																			
下方光束 Fd= 100.0%																			
			最大取付間隔 A-A 0.96 H B-B H 保守率 良 0.81 中 0.79 否 0.75																
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 																
	A-0	B-B															C-0	A'-0	C'-0
0	927																		
10	882																		
20	765																		
30	500																		
40	241																		
50	68																		
60	16																		
70	5																		
80	1																		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			