


日立照明器具 照明特性

名称: 高天井LED器具		天井	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: MVE1403NN(A)		床	10%															0%
			照明率 S/H=1.0															
<備考> 水銀ランプ 400ワス (ビームの開き角:60°)		室指数	0.6	0.80	0.72	0.68	0.79	0.72	0.68	0.65	0.71	0.67	0.64	0.71	0.67	0.64	0.63	
			0.8	0.87	0.81	0.77	0.86	0.80	0.76	0.73	0.79	0.76	0.73	0.79	0.75	0.73	0.72	
姿図 		1	0.91	0.86	0.82	0.90	0.85	0.81	0.79	0.84	0.81	0.78	0.83	0.80	0.78	0.76		
			1.25	0.95	0.90	0.86	0.94	0.89	0.86	0.83	0.88	0.85	0.83	0.87	0.84	0.82	0.81	
			1.5	0.97	0.93	0.90	0.96	0.92	0.89	0.87	0.91	0.88	0.86	0.90	0.88	0.86	0.84	
			2	1.00	0.97	0.94	0.99	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.88	
			2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.93	0.92	0.90	
			3	1.03	1.00	0.98	1.02	0.99	0.97	0.96	0.98	0.96	0.94	0.96	0.95	0.93	0.91	
			4	1.04	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.96	0.95	0.93	
光源		5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.95		
品名	LED		7	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97	
形式	-			1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97	
光束		10	1.08	1.07	1.06	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.01	0.99		

器具効率 Ft= 100.0%

上方光束 Fu= 0.0%

下方光束 Fd= 100.0%

最大取付間隔

A-A 0.94 H

B-B H

保守率

良 0.81


中 0.79

否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	933				
10	889				
20	760				
30	500				
40	245				
50	70				
60	17				
70	5				
80	2				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

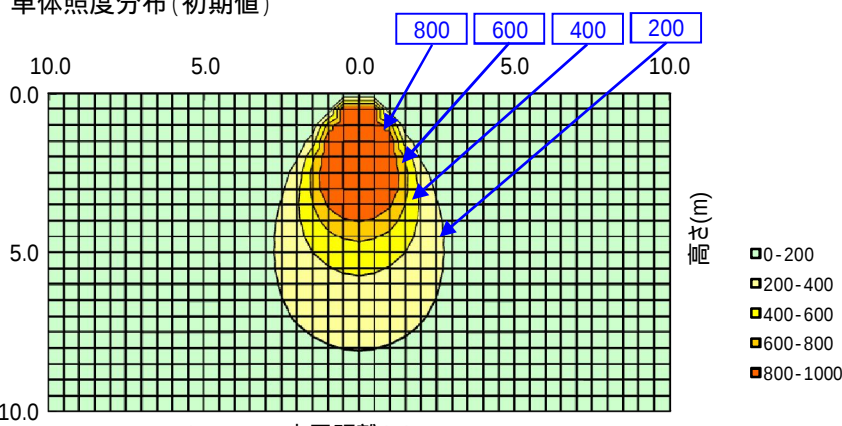

800 600 400 200


10.0 5.0 0.0 5.0 10.0

0.0 5.0 10.0

水平距離(m)

0-200
200-400
400-600
600-800
800-1000

配光曲線 (cd/1000 lm)

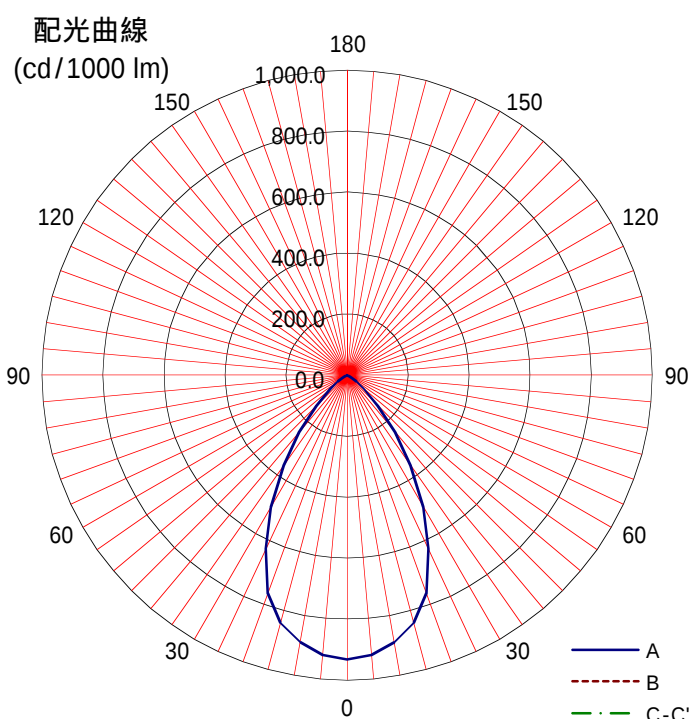

180 150 120 90 60 30 0

1000.0 800.0 600.0 400.0 200.0 0.0

A B C-C'