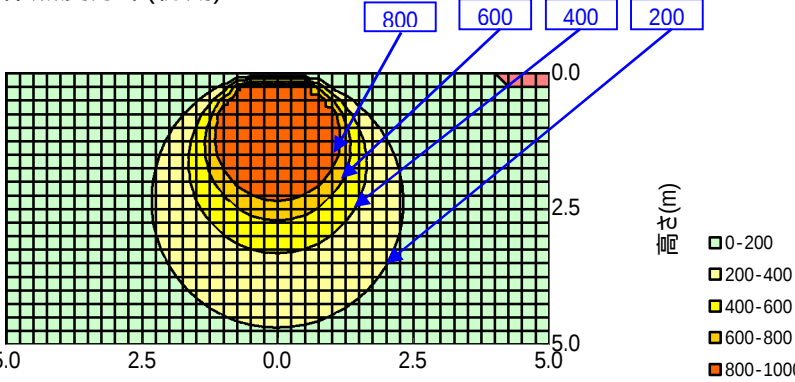


日立照明器具 照明特性

形式: NE11201N-JU24A		天井	80%			70%				50%			30%			0%
<高出力タイプ> <初期照度補正形>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
		室指数	照明率 S/H=1.0													
		0.6	0.56	0.44	0.36	0.54	0.43	0.36	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27
		0.8	0.65	0.54	0.46	0.63	0.53	0.45	0.40	0.50	0.44	0.39	0.49	0.43	0.38	0.35
		1	0.72	0.61	0.53	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.41
		1.25	0.77	0.67	0.60	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48
		1.5	0.82	0.73	0.66	0.79	0.71	0.64	0.59	0.68	0.62	0.58	0.65	0.61	0.56	0.53
		2	0.87	0.80	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.66	0.72	0.68	0.64	0.60
		2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.73	0.79	0.75	0.71	0.76	0.72	0.69	0.65
		3	0.93	0.87	0.82	0.91	0.85	0.81	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.68
光源		4	0.96	0.91	0.87	0.94	0.90	0.86	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.73
品名	LED	5	0.98	0.94	0.91	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.85	0.83	0.81	0.76
形式	-	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.92	0.90	0.88	0.89	0.87	0.85	0.81
器具光束	14,700 lm	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.95	0.94	0.92	0.92	0.90	0.89	0.85

器具効率 Ft= 100.0%			単体照度分布(初期) 													
上方光束 Fu= 7.0%																
下方光束 Fd= 93.0%																
配光分類																
BZ-																
最大取付間隔																
A-A 1.30 H																
B-B 1.28 H																
保守率	良	0.88														
	中	0.86														
	否	0.81														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	298	298	298													
10	295	294	295													
20	281	280	281													
30	258	256	258													
40	227	225	227													
50	189	184	187													
60	149	137	142													
70	109	84	98													
80	64	32	54													
90	42	2	28													
100	26	3	15													
110	16	4	9													
120	12	5	9													
130	11	7	9													
140	11	7	9													
150	10	8	8													
160	10	9	8													
170	8	9	8													
180																

配光曲線		
