
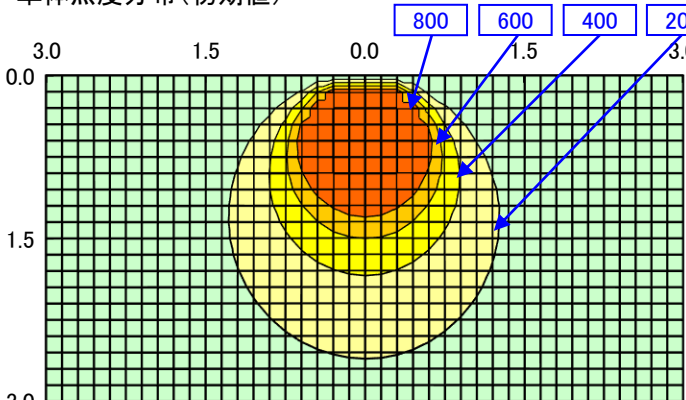
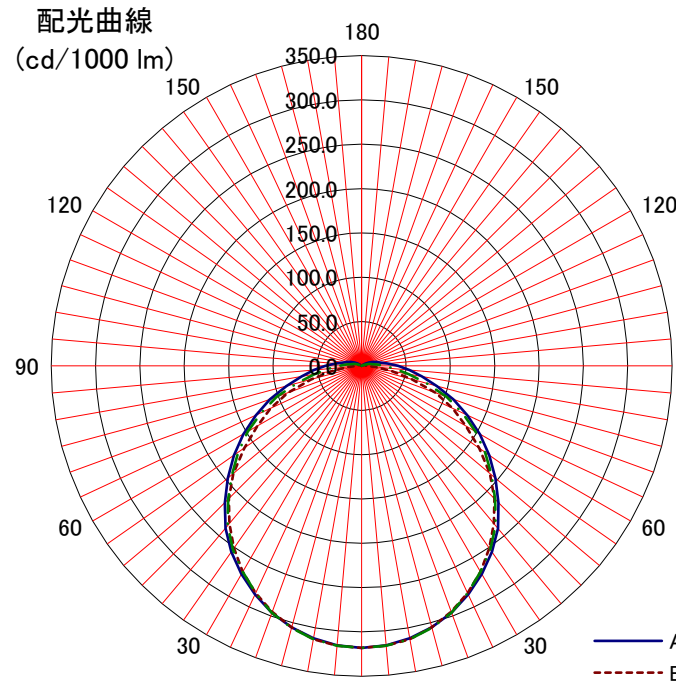


日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
形式: NC4A1	室指数	固有照明率 S/H=1.0																		
〈備考〉	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28					
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37					
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43					
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50					
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55					
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63					
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68					
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71					
	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76					
光源形式 CE404WWE-N14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80					
器具光束 4,270 lm	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84					
	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88					
器具効率 Ft= 100%		<div><p>単体照度分布 (初期値)</p><p>800 600 400 200</p><p>3.0 1.5 0.0 1.5 3.0</p><p>0.0 1.5 3.0</p><p>A ← 水平距離(m) → B</p><p>(E) 照度</p><ul style="list-style-type: none">0-200200-400400-600600-800800-1000</div>																		
上方光束 Fu= 3.5%																				
下方光束 Fd= 96.5%																				
最大取付間隔		<div><p>配光曲線 (cd/1000 lm)</p><p>180 150 120 90 60 30 0</p><p>350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</p><p>A B C-C'</p></div>																		
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.88	<div><p>0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170 180</p><p>318 312 296 271 239 197 154 110 69 41 21 13 5</p><p>318 313 295 268 235 189 136 89 35 5 5 3 2</p><p>318 313 296 268 235 191 148 102 54 25 12 6 1</p></div>																	
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)																				
	A-0	B-B	C-0	A'-0	C'-0															
0	318	318	318																	
10	312	313	313																	
20	296	295	296																	
30	271	268	268																	
40	239	232	235																	
50	197	189	191																	
60	154	136	148																	
70	110	89	102																	
80	69	35	54																	
90	41	5	25																	
100	21	5	12																	
110	13	3	6																	
120	5	2	1																	
130																				
140																				
150																				
160																				
170																				
180																				