
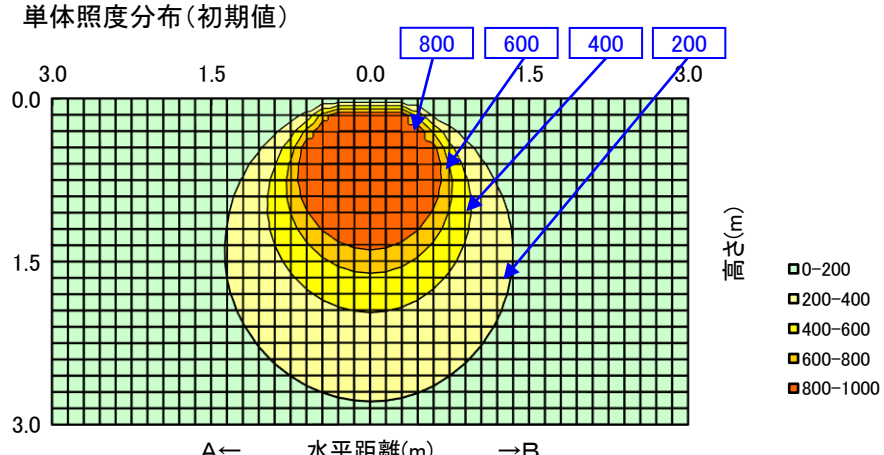
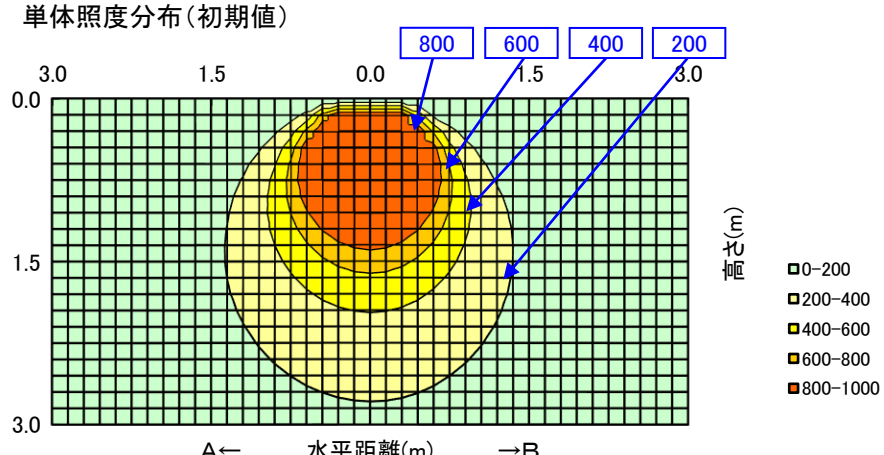
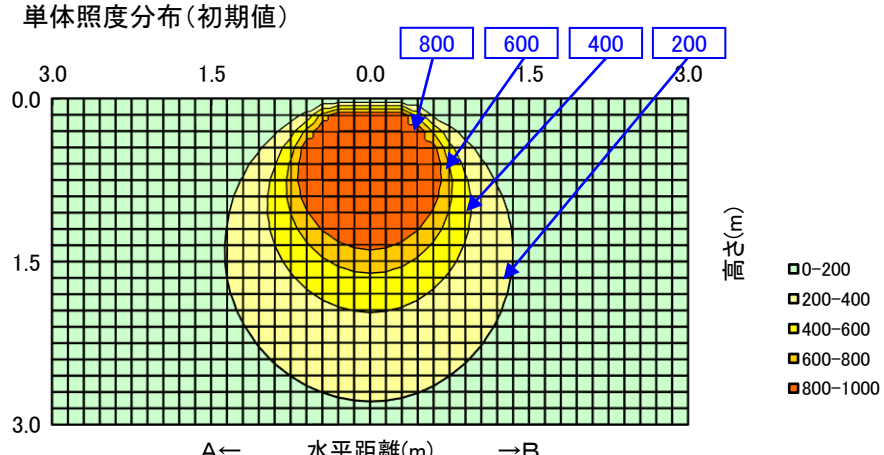


# 日立照明器具 照明特性

名称: 交換形LED逆富士形 CP付	反射率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
形式: NC4A1CP	室指数	固有照明率 S/H=1.0																		
<備考>	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28					
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37					
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43					
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50					
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55					
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63					
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68					
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71					
光源形式 CE405LG-C14A	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76					
	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80					
器具光束 4,880 lm	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84					
	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88					
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																		
上方光束 Fu= 3.5%																				
下方光束 Fd= 96.5%																				
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> 																		
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.88	<div>0-200</div> <div>200-400</div> <div>400-600</div> <div>600-800</div> <div>800-1000</div>																	
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)		<div>配光曲線</div> <div>(cd/1000 lm)</div> 																		
	A-0																B-B	C-0	A'-0	C'-0
0	318																318	318		
10	312																313	313		
20	296																295	296		
30	271																268	268		
40	239																232	235		
50	197																189	191		
60	154																136	148		
70	110																89	102		
80	69																35	54		
90	41																5	25		
100	21																5	12		
110	13																3	6		
120	5																2	1		
130																				
140																				
150																				
160																				
170																				
180																				