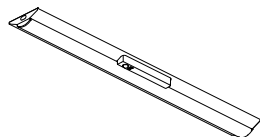
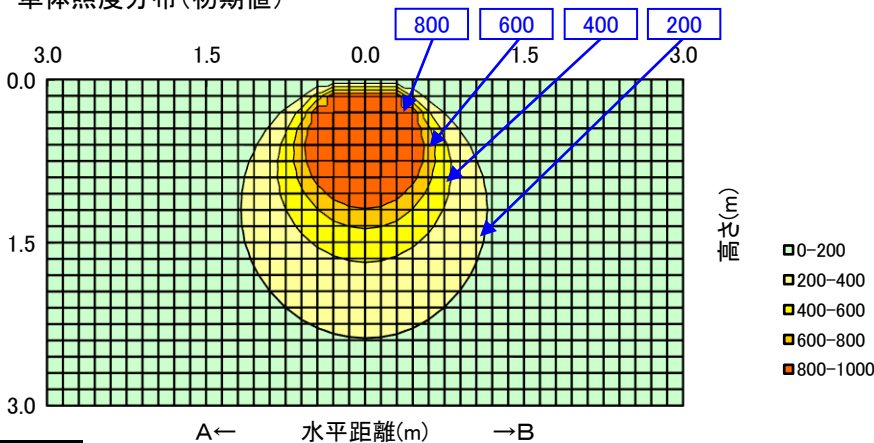
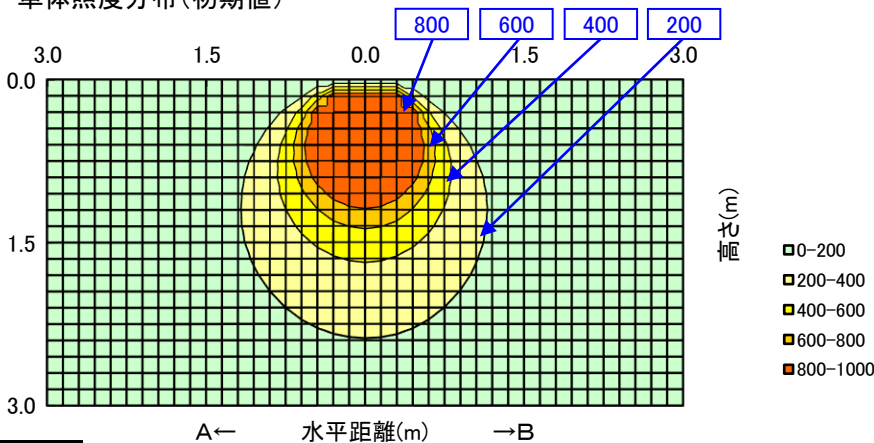
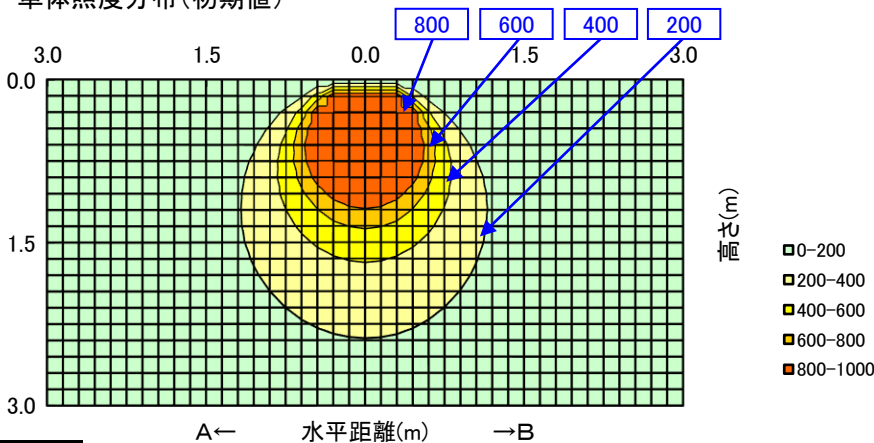
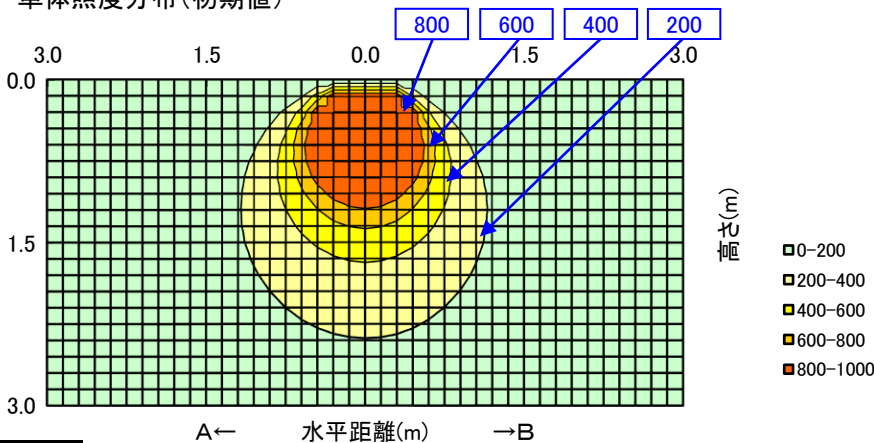
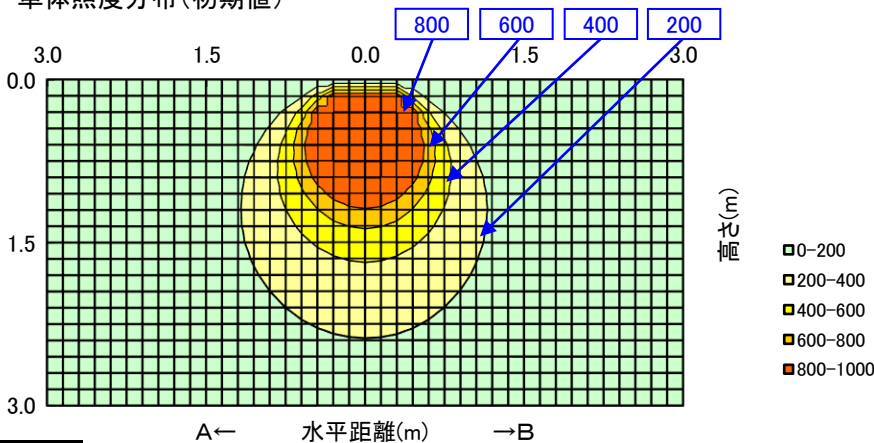


日立照明器具 照明特性

人感センサー付 名称: 交換形ベース器具 (逆富士形)			反 射 率	天井	80%			70%			50%			30%			0%														
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
				床	10%														0%												
形式: NC4A1SL			室指数	固有照明率 S/H=1.0																											
<備考>			0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28														
			0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37														
姿図 			1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43														
			1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50														
			1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55														
			2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63														
			2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68														
			3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71														
光源形式			4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76														
CE403LE-X14A			5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80														
器具光束			7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84														
3,560 lm			10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88														
器具効率 Ft= 100%				単体照度分布(初期値) 																											
上方光束 Fu= 3.5%																															
下方光束 Fd= 96.5%																															
最大取付間隔																															
A-A 1.28 H																															
B-B 1.26 H																															
保守率	良	0.88																													
	中	0.86																													
	否	0.81																													
光度 (cd/1000 lm)																	配光曲線 (cd/1000 lm) 														
	A-0	B-B															C-0	A'-0	C'-0												
0	318	318															318														
10	312	313															313														
20	296	295															296														
30	271	268															268														
40	239	232															235														
50	197	189															191														
60	154	136															148														
70	110	89															102														
80	69	35															54														
90	41	5															25														
100	21	5															12														
110	13	3															6														
120	5	2															1														
130																															
140																															
150																															
160																															
170																															
180																															