
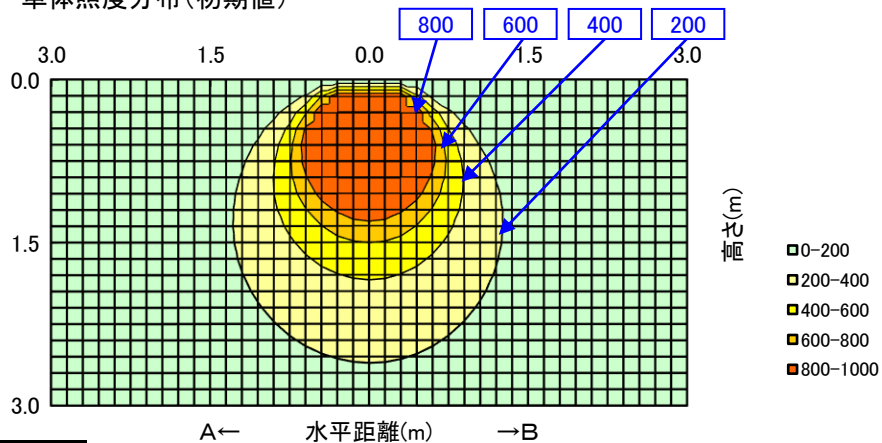
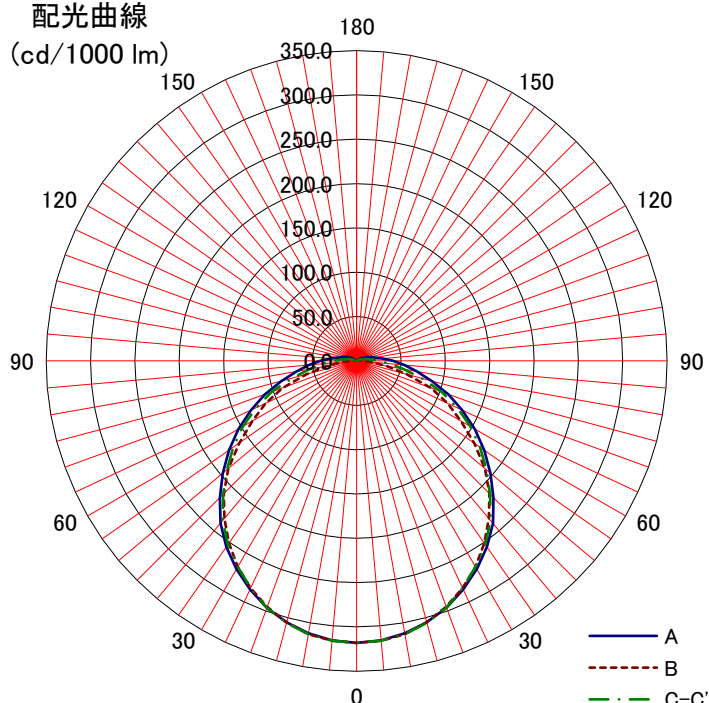
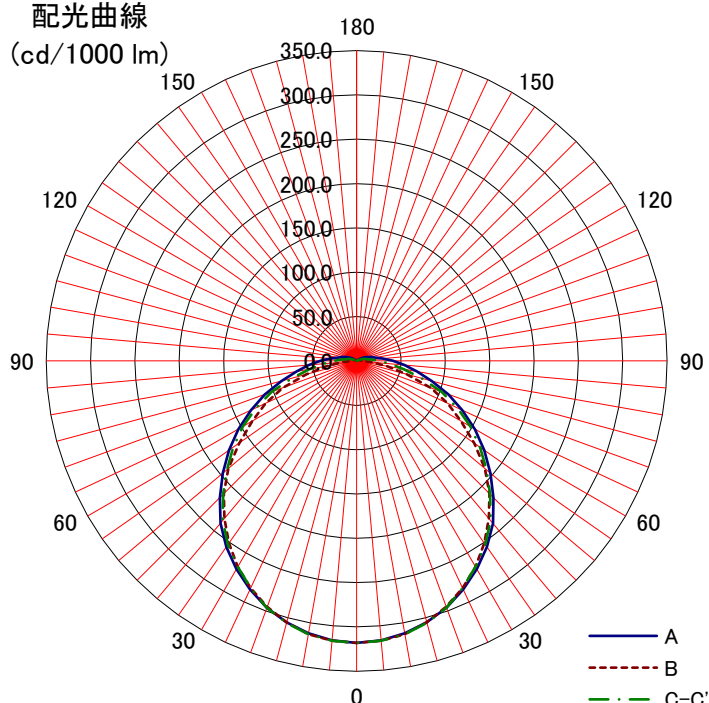


# 日立照明器具 照明特性

名称: 人感センサー付 交換形ベース器具 (逆富士形)		反射率	天井	80%				70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
形式: NC4A1SL		室指数	固有照明率 S/H=1.0																
〈備考〉			0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28		
<div>姿図</div> 		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37			
		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43			
		1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50			
		1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55			
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63			
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68			
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71			
光源形式		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76			
CE404WWE-X14A		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80			
器具光束		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84			
4,270 lm		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88			
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																
上方光束 Fu= 3.5%																			
下方光束 Fd= 96.5%																			
最大取付間隔			<div>配光曲線</div> <div>(cd/1000 lm)</div> 																
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.88																	
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)			<div>配光曲線</div> <div>(cd/1000 lm)</div> 																
	A-0	B-B															C-0	A'-0	C'-0
0	318	318															318		
10	312	313															313		
20	296	295															296		
30	271	268															268		
40	239	232															235		
50	197	189															191		
60	154	136															148		
70	110	89															102		
80	69	35															54		
90	41	5															25		
100	21	5															12		
110	13	3															6		
120	5	2															1		
130																			
140																			
150																			
160																			
170																			
180																			