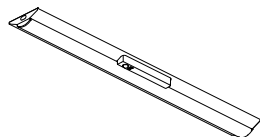
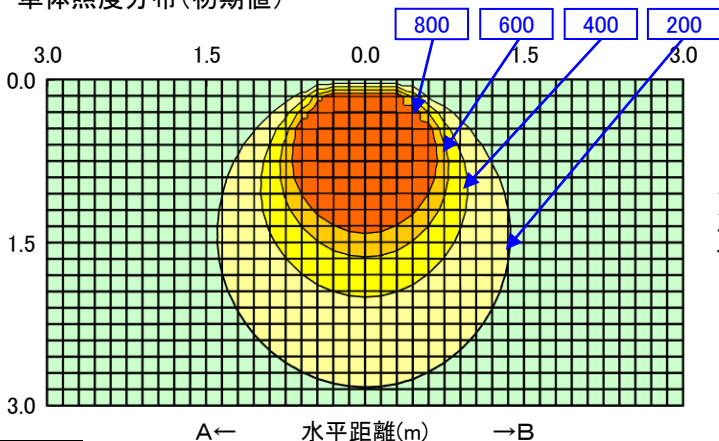
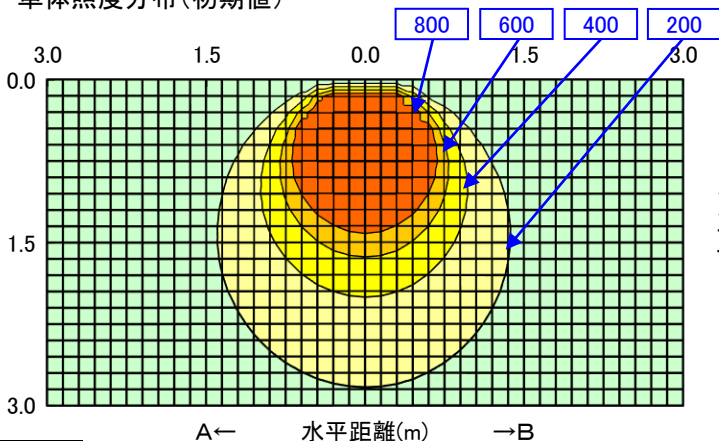
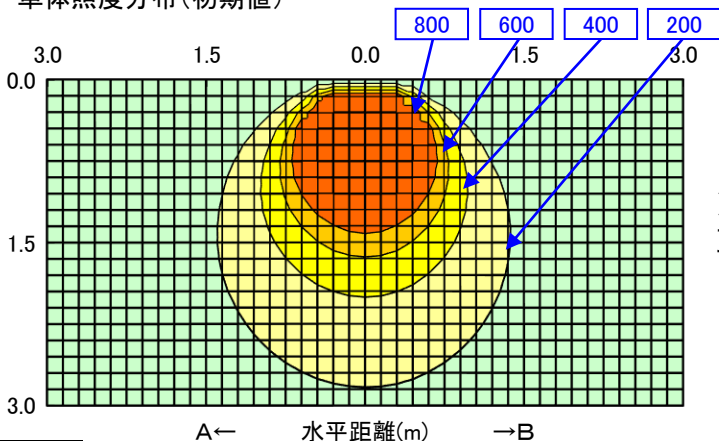
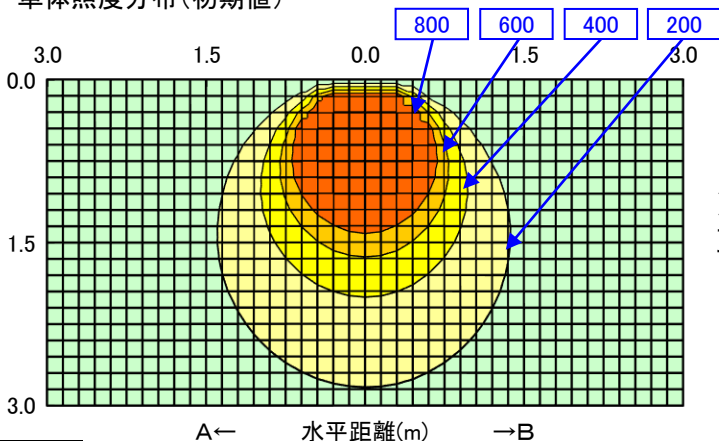
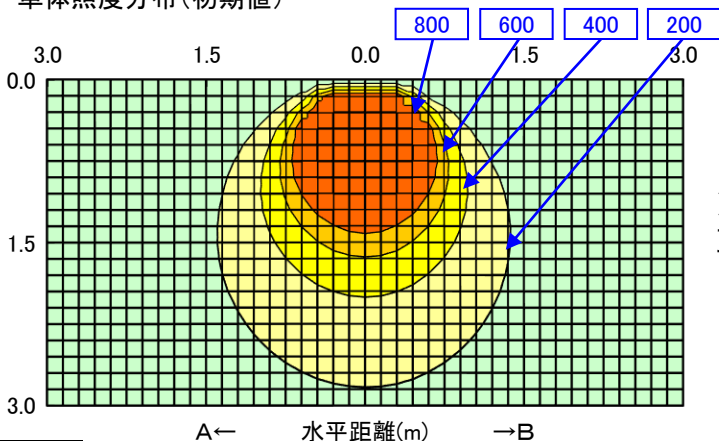
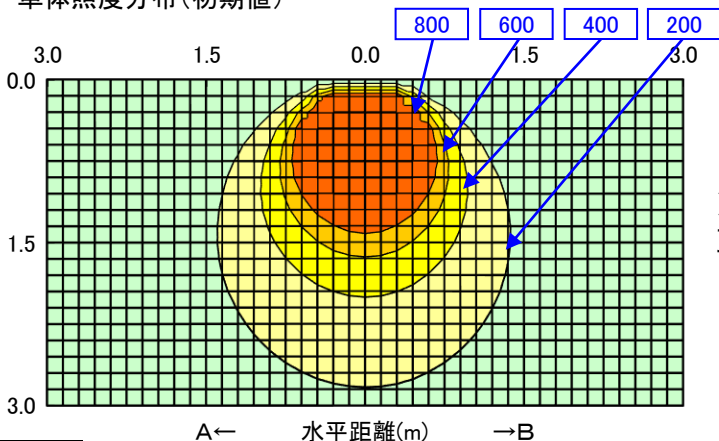


# 日立照明器具 照明特性

名称: 人感センサー付 交換形ベース器具 (逆富士形)	天井	80%			70%				50%			30%			0%				
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
	床	10%													0%				
形式: NC4A1SL	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28				
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37				
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43				
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50				
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55				
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63				
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68				
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71				
光源形式 CE405WWE-X14A	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76				
	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80				
器具光束 5,040 lm	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84				
	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88				
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																	
上方光束 Fu= 3.5%																			
下方光束 Fd= 96.5%																			
最大取付間隔		<div>配光曲線</div> 																	
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.88	<div>配光曲線</div> 																
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)		<div>配光曲線</div> 																	
	A-0															B-B	C-0	A'-0	C'-0
0	318															318	318		
10	312															313	313		
20	296	295	296																
30	271	268	268																
40	239	232	235																
50	197	189	191																
60	154	136	148																
70	110	89	102																
80	69	35	54																
90	41	5	25																
100	21	5	12																
110	13	3	6																
120	5	2	1																
130																			
140																			
150																			
160																			
170																			
180																			
配光曲線 (cd/1000 lm)		<div>配光曲線</div> 																	
		<div>配光曲線</div> 																	
		<div>配光曲線</div> 