
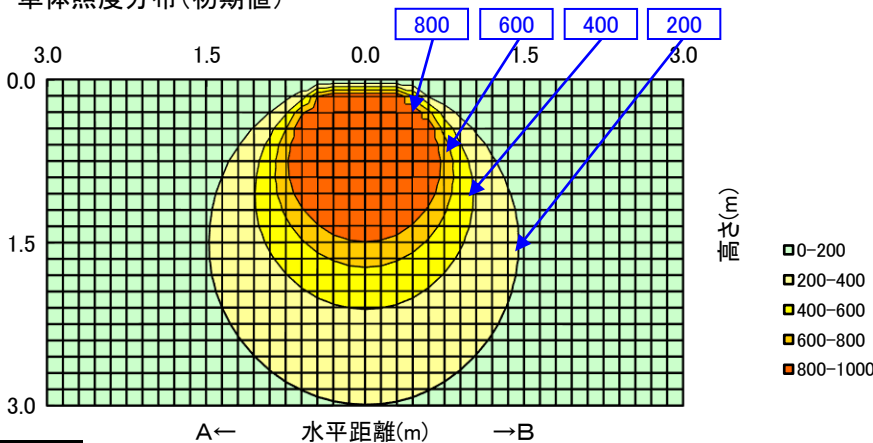
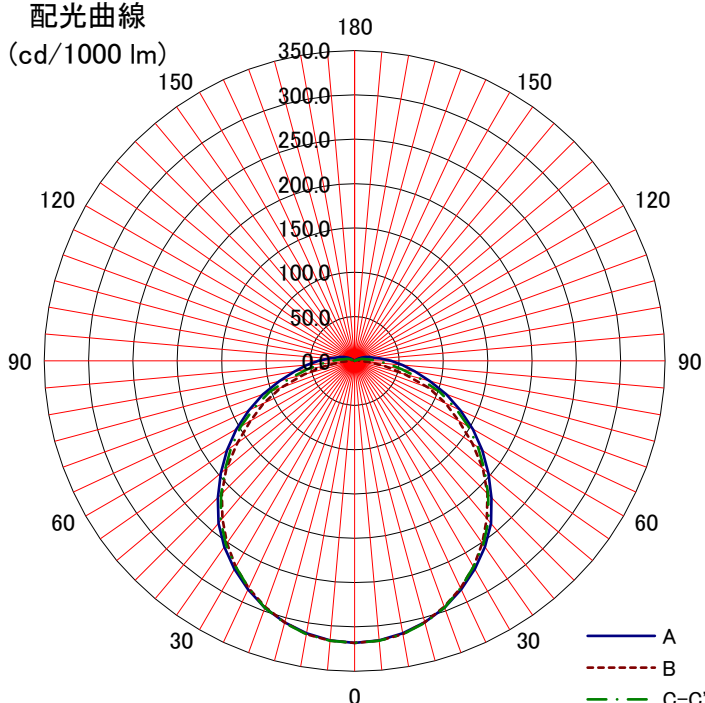
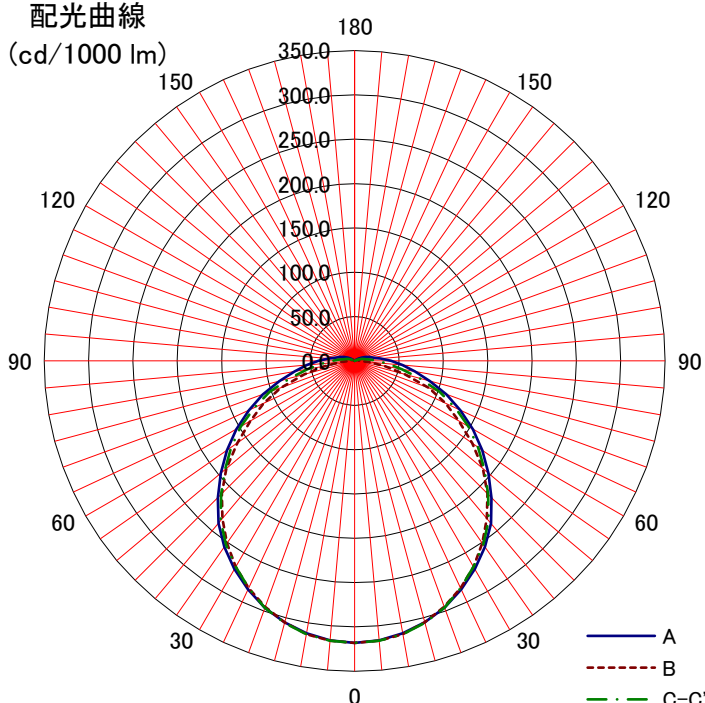


日立照明器具 照明特性

名称: 人感センサー付 交換形ベース器具 (逆富士形)		天井	80%			70%				50%			30%			0%														
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
				床	10%														0%											
形式: NC4A1SL		反射率	室指数	固有照明率 S/H=1.0																										
<備考>				0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28												
姿図 		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37														
		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43														
		1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50														
		1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55														
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63														
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68														
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71														
光源形式		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76														
CE406LE-X14A		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80														
器具光束		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84														
5,630 lm		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88														
器具効率 Ft= 100%			単体照度分布(初期値) 																											
上方光束 Fu= 3.5%																														
下方光束 Fd= 96.5%																														
最大取付間隔			A← 水平距離(m) →B 																											
A-A 1.28 H																														
B-B 1.26 H																														
保守率	良	0.88	配光曲線 (cd/1000 lm) 																											
	中	0.86																												
	否	0.81																												
光度 (cd/1000 lm)																														
	A-0	B-B															C-0	A'-0	C'-0											
0	318	318															318													
10	312	313															313													
20	296	295															296													
30	271	268															268													
40	239	232															235													
50	197	189															191													
60	154	136															148													
70	110	89															102													
80	69	35															54													
90	41	5															25													
100	21	5															12													
110	13	3															6													
120	5	2															1													
130																														
140																														
150																														
160																														
170																														
180																														