
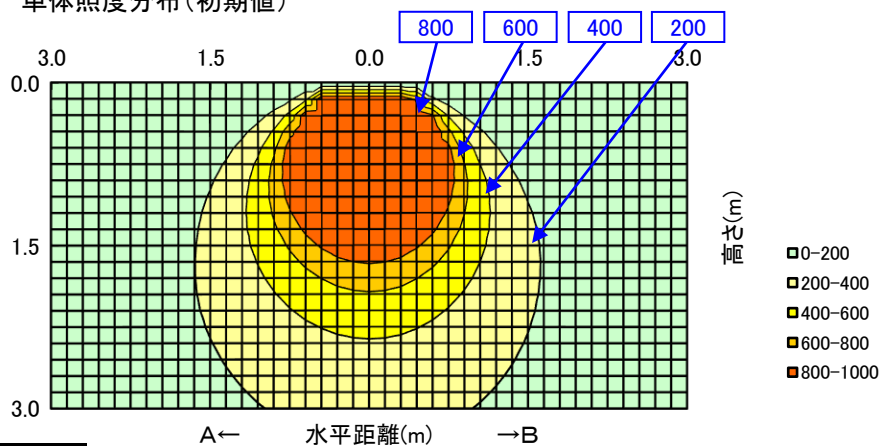
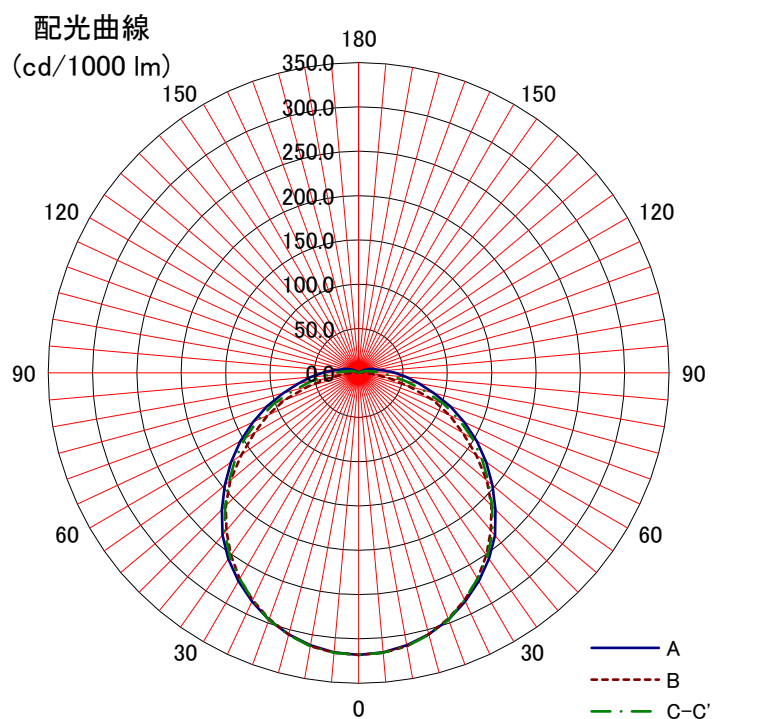


# 日立照明器具 照明特性

|   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|---|------|---|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 名称: 交換形LED逆富士形  | 反射率  | 天井  | 80%  |      |      | 70%  |      |      |      | 50%  |      |      | 30%  |      |      | 0%   |
|   |      | 壁   | 70%  | 50%  | 30%  | 70%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 50%  | 30%  | 10%  | 0%   |
|   |      | 床   | 10%  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 形式: NC4B1   | 室指数  | 固有照明率 S/H=1.0   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 〈備考〉  | 0.6  | 0.57  | 0.45 | 0.37 | 0.55 | 0.44 | 0.36 | 0.31 | 0.42 | 0.36 | 0.31 | 0.41 | 0.35 | 0.31 | 0.28 |      |
|   | 0.8  | 0.66  | 0.54 | 0.46 | 0.64 | 0.53 | 0.46 | 0.40 | 0.52 | 0.45 | 0.40 | 0.50 | 0.44 | 0.39 | 0.37 |      |
| 姿図<br> | 1    | 0.72  | 0.61 | 0.53 | 0.70 | 0.60 | 0.53 | 0.47 | 0.58 | 0.52 | 0.47 | 0.56 | 0.51 | 0.46 | 0.43 |      |
|   | 1.25 | 0.78  | 0.68 | 0.61 | 0.76 | 0.67 | 0.60 | 0.54 | 0.65 | 0.58 | 0.53 | 0.63 | 0.57 | 0.53 | 0.50 |      |
|   | 1.5  | 0.82  | 0.73 | 0.66 | 0.81 | 0.72 | 0.65 | 0.60 | 0.70 | 0.64 | 0.59 | 0.67 | 0.62 | 0.58 | 0.55 |      |
|   | 2    | 0.88  | 0.80 | 0.74 | 0.86 | 0.79 | 0.73 | 0.68 | 0.76 | 0.71 | 0.67 | 0.74 | 0.70 | 0.66 | 0.63 |      |
|   | 2.5  | 0.92  | 0.85 | 0.79 | 0.90 | 0.83 | 0.78 | 0.74 | 0.81 | 0.76 | 0.72 | 0.78 | 0.74 | 0.71 | 0.68 |      |
|   | 3    | 0.94  | 0.88 | 0.83 | 0.92 | 0.86 | 0.82 | 0.78 | 0.84 | 0.80 | 0.76 | 0.81 | 0.77 | 0.74 | 0.71 |      |
|   | 4    | 0.97  | 0.92 | 0.88 | 0.95 | 0.91 | 0.87 | 0.83 | 0.88 | 0.84 | 0.81 | 0.85 | 0.82 | 0.80 | 0.76 |      |
| 光源形式<br>CE407NE-C14A  | 5    | 0.99  | 0.95 | 0.91 | 0.97 | 0.94 | 0.90 | 0.87 | 0.91 | 0.88 | 0.85 | 0.88 | 0.85 | 0.83 | 0.80 |      |
| 器具光束<br>7,000 lm  | 7    | 1.02  | 0.99 | 0.96 | 1.00 | 0.97 | 0.95 | 0.92 | 0.94 | 0.92 | 0.90 | 0.91 | 0.90 | 0.88 | 0.84 |      |
|   | 10   | 1.04  | 1.02 | 1.00 | 1.02 | 1.00 | 0.98 | 0.96 | 0.97 | 0.95 | 0.94 | 0.94 | 0.93 | 0.92 | 0.88 |      |
| 器具効率 Ft= 100%   |      | <div>単体照度分布(初期値)</div>             |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 上方光束 Fu= 3.5%   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 下方光束 Fd= 96.5%  |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 最大取付間隔  |      | <div>配光曲線<br/>(cd/1000 lm)</div>  |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| A-A 1.28 H  |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| B-B 1.26 H  |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 保守率   | 良    |   |      |      |      |      |      |      |      |      |      |      |      |      |      | 0.88 |
|   | 中    |   |      |      |      |      |      |      |      |      |      |      |      |      |      | 0.86 |
|   | 否    |   |      |      |      |      |      |      |      |      |      |      |      |      |      | 0.81 |
| 光度 (cd/1000 lm)   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|   | A-0  | B-B   | C-0  | A'-0 | C'-0 |      |      |      |      |      |      |      |      |      |      |      |
| 0   | 318  | 318   | 318  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 10  | 312  | 313   | 313  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 20  | 296  | 295   | 296  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 30  | 271  | 268   | 268  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 40  | 239  | 232   | 235  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 50  | 197  | 189   | 191  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 60  | 154  | 136   | 148  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 70  | 110  | 89  | 102  |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 80  | 69   | 35  | 54   |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 90  | 41   | 5   | 25   |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 100   | 21   | 5   | 12   |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 110   | 13   | 3   | 6    |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 120   | 5    | 2   | 1    |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 130   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 140   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 150   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 160   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 170   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 180   |      |   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |