
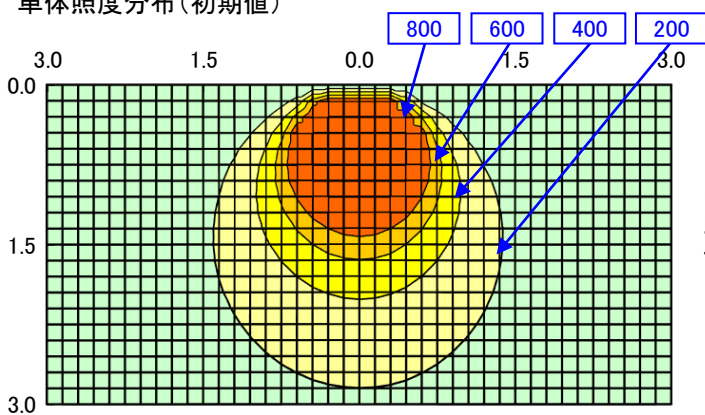


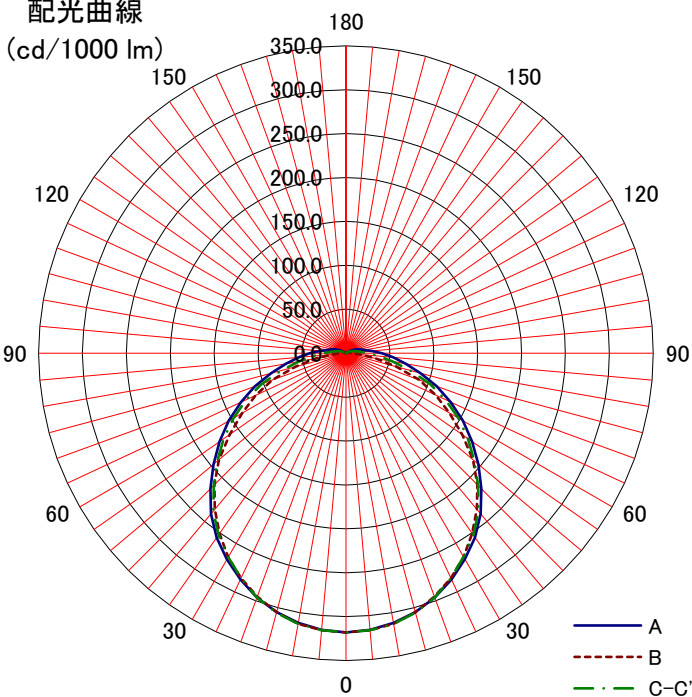


日立照明器具 照明特性

名称: 交換形LED逆富士形 CP付	反 射 率	天井	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
		室指数	固有照明率 S/H=1.0																	
形式: NC4B1CP																				
<備考>		0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28				
		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37				
姿図 		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43				
		1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50				
		1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55				
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63				
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68				
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71				
		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76				
光源形式		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80				
器具光束		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84				
5,100 lm		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88				
器具効率 Ft= 100%			<div>単体照度分布 (初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																	
上方光束 Fu= 3.5%																				
下方光束 Fd= 96.5%																				
最大取付間隔			<div>最大取付間隔</div> 																	
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.88	<div>保守率</div> 																	
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)			<div>配光曲線 (cd/1000 lm)</div>  <div>A B C-C'</div>																	
	A-0	B-B																C-0	A'-0	C'-0
0	318	318																318		
10	312	313																313		
20	296	295																296		
30	271	268																268		
40	239	232																235		
50	197	189																191		
60	154	136																148		
70	110	89																102		
80	69	35																54		
90	41	5																25		
100	21	5																12		
110	13	3																6		
120	5	2																1		
130																				
140																				
150																				
160																				
170																				
180																				