
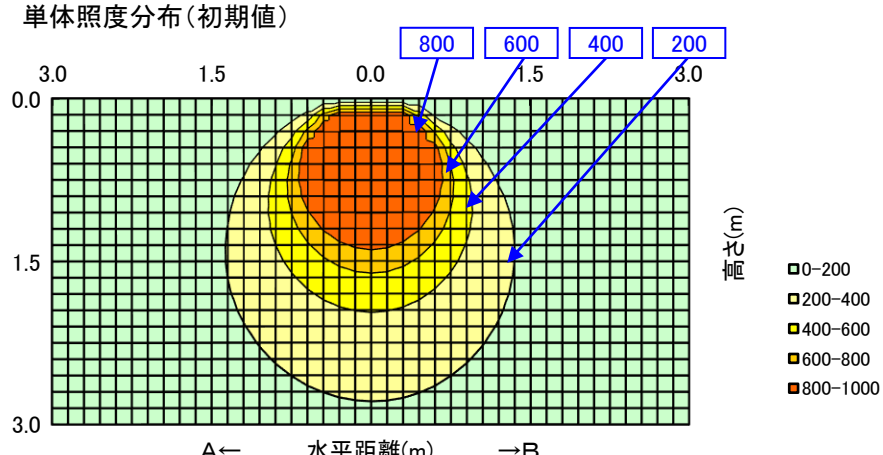
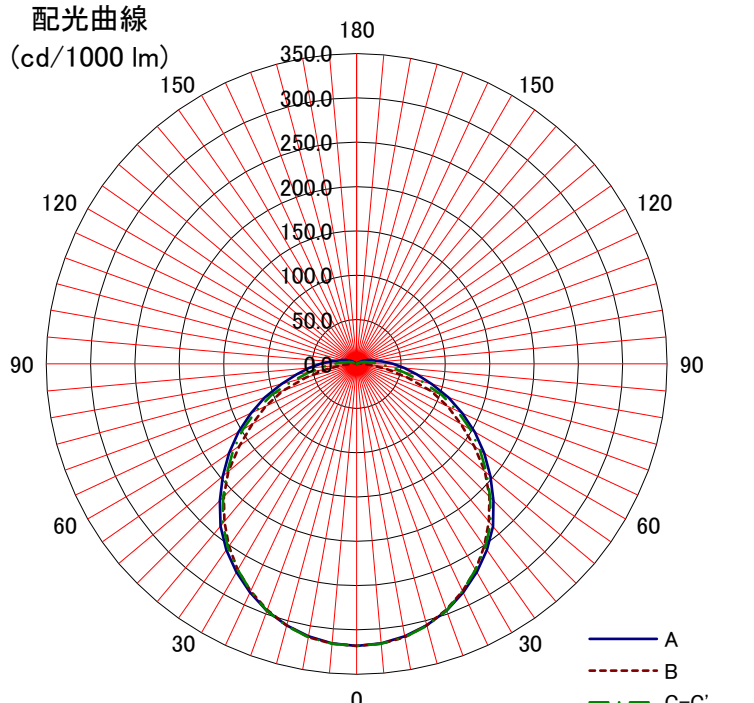


日立照明器具 照明特性

名称: 交換形LED逆富士形 CP付	反射率	天井	80%			70%				50%			30%			0%					
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%					
		床	10%														0%				
形式: NC4B1CP	室指数	固有照明率 S/H=1.0																			
<備考>	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28						
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37						
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43						
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50						
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55						
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63						
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68						
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71						
	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76						
光源形式 CE405LE-X14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80						
器具光束 4,880 lm	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84						
	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88						
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																			
上方光束 Fu= 3.5%																					
下方光束 Fd= 96.5%																					
最大取付間隔		<div>保守率</div> <table><tr><td>良</td><td>0.88</td></tr><tr><td>中</td><td>0.86</td></tr><tr><td>否</td><td>0.81</td></tr></table>														良	0.88	中	0.86	否	0.81
良	0.88																				
中	0.86																				
否	0.81																				
A-A 1.28 H																					
B-B 1.26 H																					
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div> 																			
	A-0	B-B	C-0	A'-0	C'-0																
0	318	318	318																		
10	312	313	313																		
20	296	295	296																		
30	271	268	268																		
40	239	232	235																		
50	197	189	191																		
60	154	136	148																		
70	110	89	102																		
80	69	35	54																		
90	41	5	25																		
100	21	5	12																		
110	13	3	6																		
120	5	2	1																		
130																					
140																					
150																					
160																					
170																					
180																					