
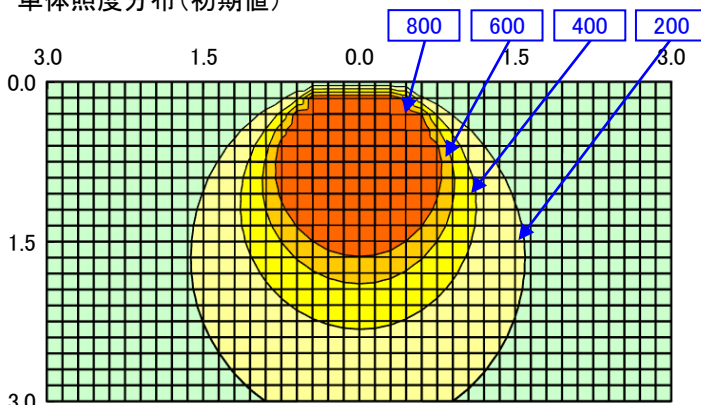
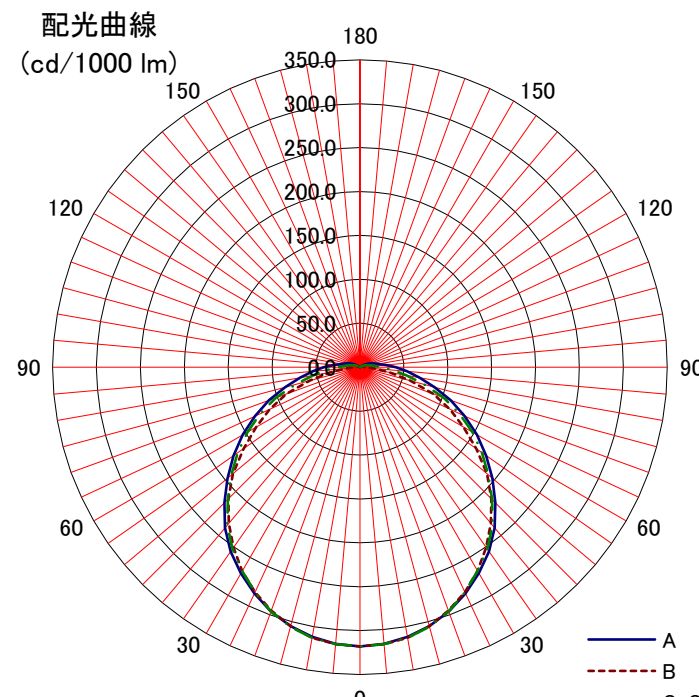


日立照明器具 照明特性

名称: 交換形LED逆富士形 CP付	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%													
形式: NC4B1CP	室指数	固有照明率 S/H=1.0															
<備考>	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28		
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37		
<div>姿図</div> 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43		
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50		
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55		
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63		
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68		
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71		
	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76		
光源形式	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80		
CE407WWG-N14A	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84		
器具光束	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88		
6,790 lm																	

器具効率 Ft= 100%			<div>単体照度分布 (初期値)</div> 			
上方光束 Fu= 3.5%						
下方光束 Fd= 96.5%						
最大取付間隔			<div>⬜ 0-200 ⬜ 200-400 ⬜ 400-600 ⬜ 600-800 ⬜ 800-1000</div>			
A-A 1.28 H						
B-B 1.26 H						
保守率	良	0.88				
	中	0.86				
	否	0.81				
光度 (cd/1000 lm)			<div>配光曲線 (cd/1000 lm)</div> 			
	A-0	B-B		C-0	A'-0	C'-0
0	318	318		318		
10	312	313		313		
20	296	295		296		
30	271	268		268		
40	239	232		235		
50	197	189		191		
60	154	136		148		
70	110	89		102		
80	69	35		54		
90	41	5		25		
100	21	5		12		
110	13	3		6		
120	5	2		1		
130						
140						
150						
160						
170						
180						