
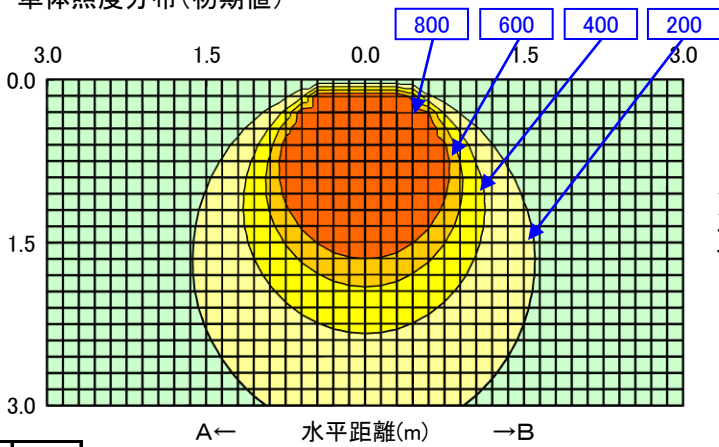






日立照明器具 照明特性

人感センサー付 名称: 交換形ベース器具 (逆富士形)		反射率	天井	80%			70%			50%			30%			0%															
形式: NC4B1SL	壁		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%															
	床		10%														0%														
		室指数	固有照明率 S/H=1.0																												
<備考>		0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28															
		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37															
姿図 		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43															
		1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50															
		1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55															
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63															
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68															
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71															
光源形式 CE407WG-X14A		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76															
器具光束 6,870 lm		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80															
		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84															
		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88															
器具効率 Ft= 100%		単体照度分布(初期値) 																													
上方光束 Fu= 3.5%																															
下方光束 Fd= 96.5%																															
最大取付間隔																															
A-A 1.28 H																															
B-B 1.26 H																															
保守率	良	0.88																													
	中	0.86																													
	否	0.81																													
光度 (cd/1000 lm)																															
	A-0																B-B	C-0	A'-0	C'-0											
0	318																318	318													
10	312																313	313													
20	296	295	296																												
30	271	268	268																												
40	239	232	235																												
50	197	189	191																												
60	154	136	148																												
70	110	89	102																												
80	69	35	54																												
90	41	5	25																												
100	21	5	12																												
110	13	3	6																												
120	5	2	1																												
130																															
140																															
150																															
160																															
170																															
180																															
配光曲線 (cd/1000 lm)																															
																															
		A B C-C'																													