
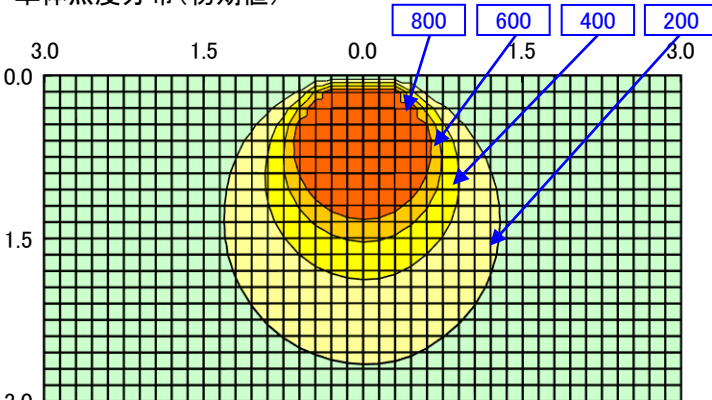
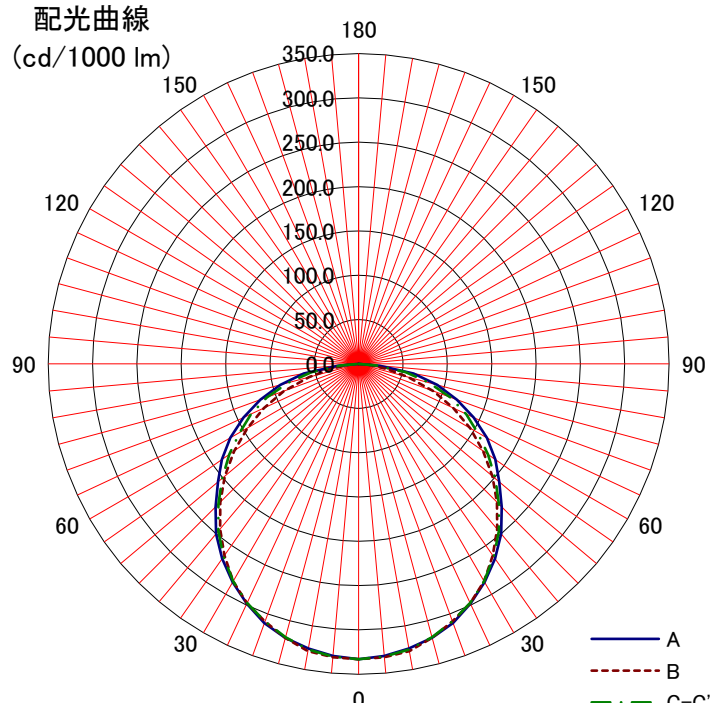


## 日立照明器具 照明特性

名称: 交換形LED下面開放形	天井 反射率 壁 床	80%			70%				50%			30%			0%
		70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		10%													0%
形式: NC4C1	室指数	固有照明率 S/H=1.0													
<div>〈備考〉</div> <div>姿図</div> <div></div>	0.6	0.57	0.45	0.37	0.56	0.45	0.37	0.32	0.43	0.37	0.32	0.42	0.36	0.32	0.30
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.52	0.46	0.41	0.39
	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45
	1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.52
	1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.60	0.58
	2	0.89	0.82	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66
	2.5	0.92	0.86	0.81	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.71
光源形式 CE404WE-X14A	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75
	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.80
器具光束 4,240 lm	5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83
	7	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88
	10	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> <div></div>													
上方光束 Fu= 0%															
下方光束 Fd= 100%															
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> <div></div>													
A-A 1.28 H															
B-B 1.26 H															
保守率	良	0.86													
	中	0.81													
	否	0.72													
光度 (cd/1000 lm)															
	A-0	B-B	C-0	A'-0	C'-0										
0	333	333	333												
10	326	329	327												
20	311	309	309												
30	284	283	283												
40	250	243	246												
50	207	197	201												
60	167	145	155												
70	118	90	110												
80	63	32	54												
90															
100															
110															
120															
130															
140															
150															
160															
170															
180															