
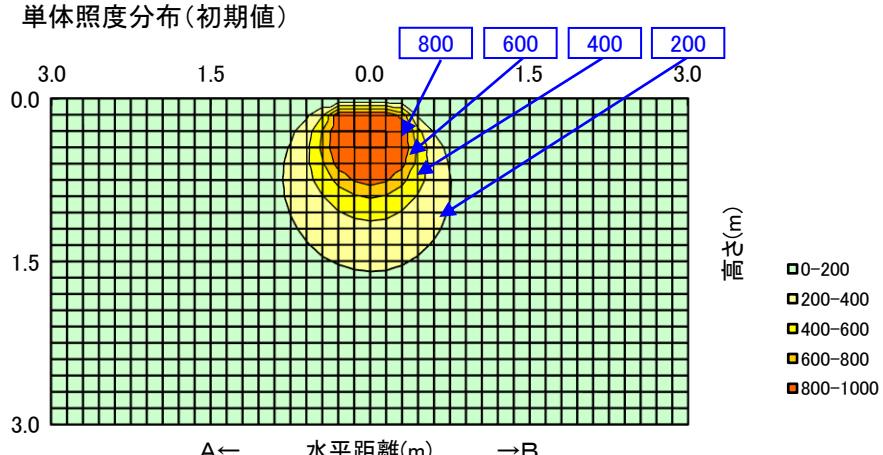
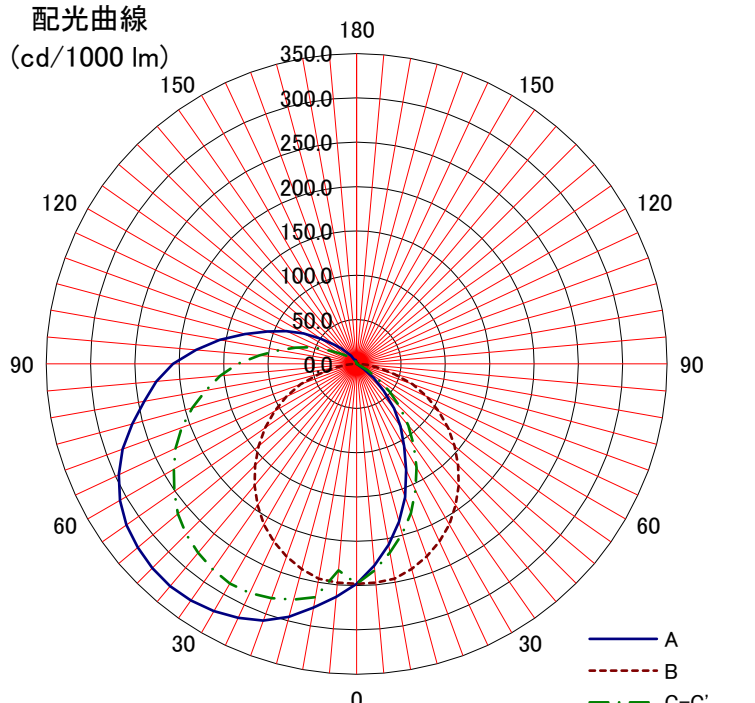


日立照明器具 照明特性

名称: 交換形LED ウォールウォッシュ形	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: NC4D	室指数	固有照明率 S/H=1.0														
＜備考＞	0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22	
	0.8	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29	
姿図 	1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34	
	1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40	
	1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44	
	2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51	
	2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55	
	3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59	
光源形式	4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64	
CET402DE-X14A	5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67	
器具光束	7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72	
2,040 lm	10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76	
器具効率 Ft= 100%		単位照度分布 (初期値)														
上方光束 Fu= 13.2%																
下方光束 Fd= 86.8%																
最大取付間隔																
A-A 1.30 H																
B-B 1.26 H																
保守率	良	0.86														
	中	0.81														
	否	0.72														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)														
	A-0	B-B	C-0	A'-0	C'-0											
	0	248	248	248	248											
	10	279	246	267	207											
	20	308	231	281	160											
	30	322	209	286	107											
	40	327	179	278	66											
	50	322	144	263	25											
	60	308	107	238												
	70	281	67	210												
	80	243	26	173												
	90	207	3	134												
	100	157	3	89												
	110	107	2	55												
	120	69	1	26												
	130	35	1	13												
	140	17	1	7												
	150	7	1	4												
	160	4	1	2												
	170	4	2	2												
	180															