
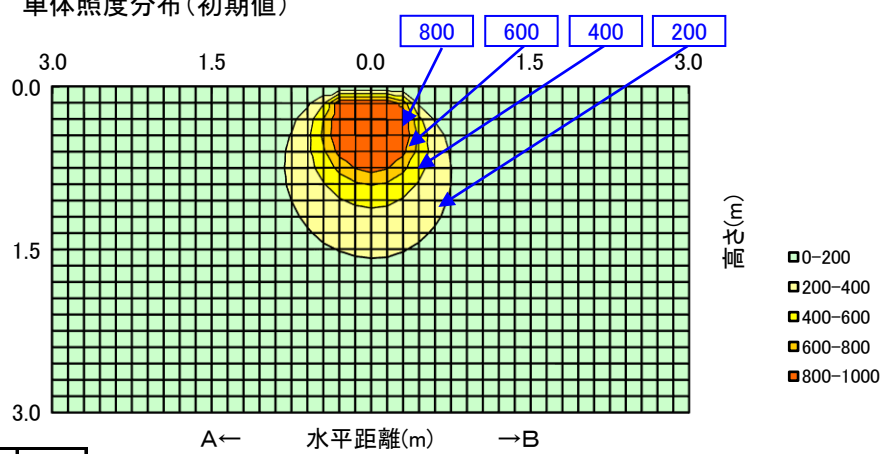
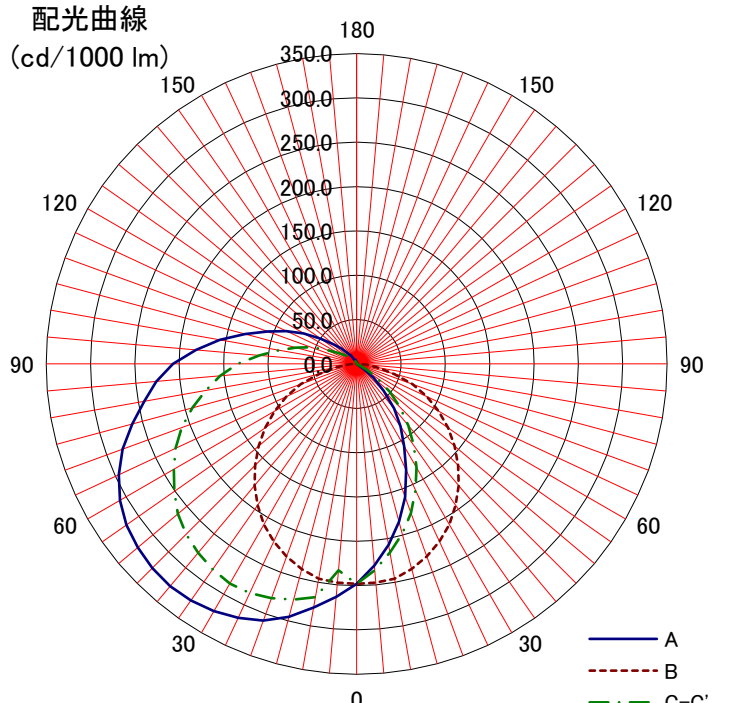
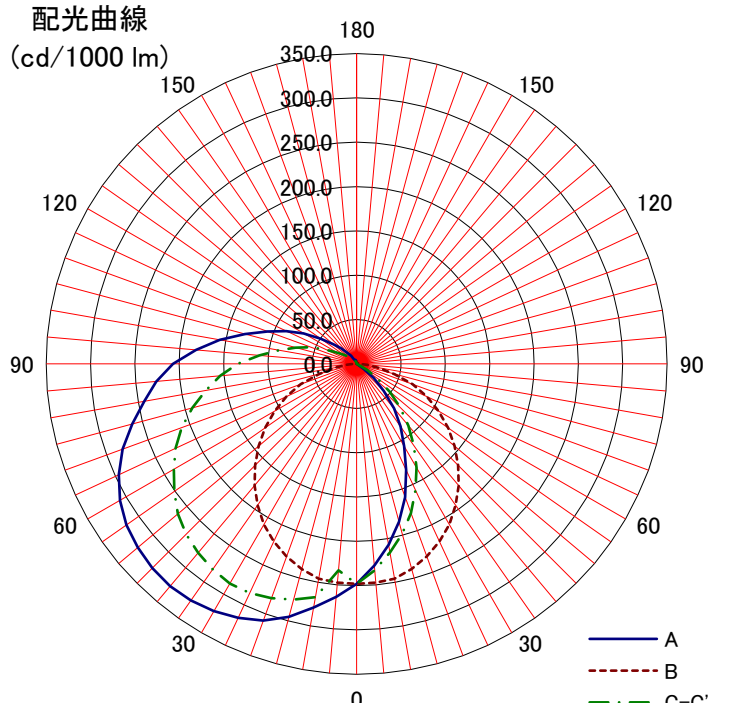


日立照明器具 照明特性

名称:交換形LED ウォールウォッシュ形	天井	80%			70%				50%			30%			0%				
	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
	床	10%													0%				
形式:NC4D	室指数	固有照明率 S/H=1.0																	
	室指数	固有照明率 S/H=1.0																	
〈備考〉	0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22				
	0.8	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29				
姿図 	1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34				
	1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40				
	1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44				
	2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51				
	2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55				
	3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59				
光源形式 CET402LE-N14A	4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64				
	5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67				
器具光束 2,010 lm	7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72				
	10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76				
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																	
上方光束 Fu= 13.2%																			
下方光束 Fd= 86.8%																			
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div> 																	
A-A 1.30 H																			
B-B 1.26 H																			
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div> 																	
A-0	B-B															C-0	A'-0	C'-0	
0	248															248	248	248	248
10	279															246	267	207	216
20	308															231	281	160	179
30	322															209	286	107	135
40	327															179	278	66	91
50	322															144	263	25	49
60	308															107	238		14
70	281															67	210		
80	243															26	173		
90	207															3	134		
100	157															3	89		
110	107															2	55		
120	69															1	26		
130	35															1	13		
140	17															1	7		
150	7															1	4		
160	4															1	2		
170	4															2	2		
180																			