
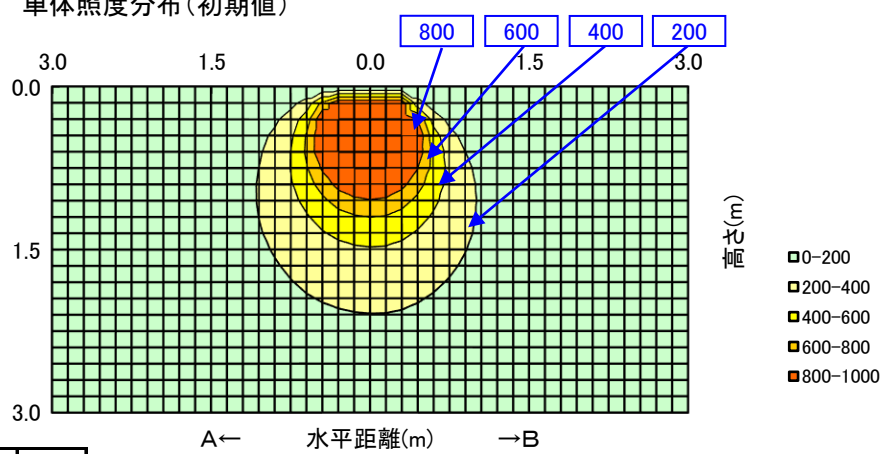
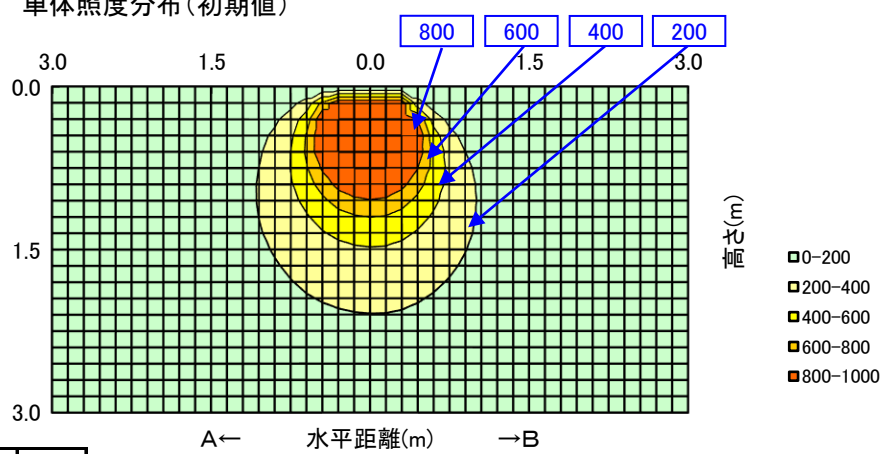
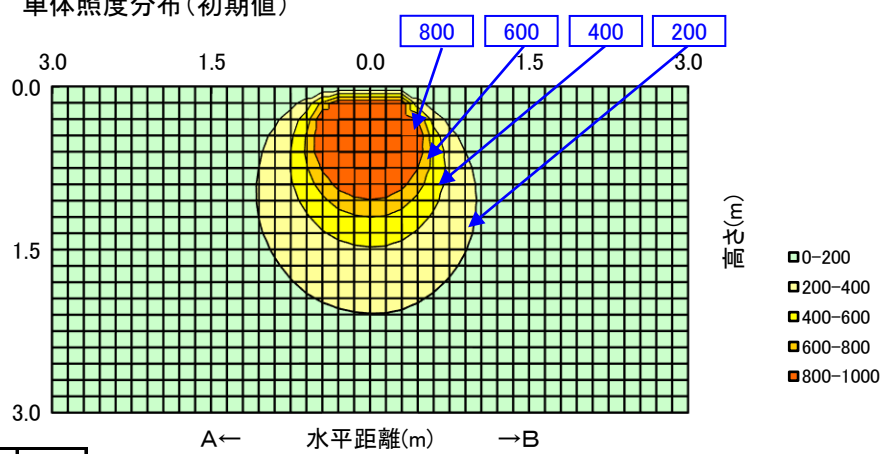
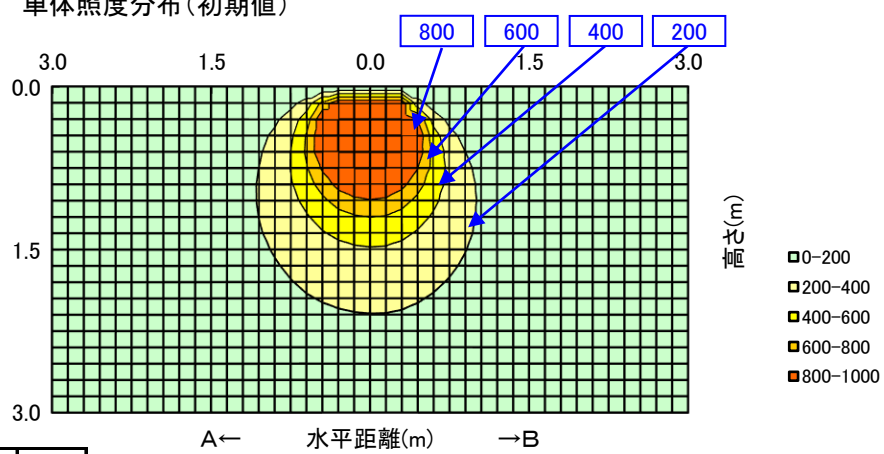


日立照明器具 照明特性

名称: 交換形LED ウォールウォッシュ形	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: NC4D	室指数	固有照明率 S/H=1.0																	
〈備考〉	0.6	0.53	0.41	0.33	0.51	0.40	0.32	0.27	0.37	0.31	0.26	0.35	0.29	0.25	0.22				
	0.8	0.62	0.50	0.42	0.60	0.48	0.41	0.35	0.46	0.39	0.34	0.43	0.37	0.33	0.29				
姿図 	1	0.68	0.56	0.48	0.65	0.55	0.47	0.41	0.52	0.45	0.40	0.49	0.43	0.38	0.34				
	1.25	0.74	0.63	0.55	0.71	0.61	0.53	0.48	0.57	0.51	0.46	0.54	0.49	0.44	0.40				
	1.5	0.78	0.68	0.60	0.75	0.66	0.59	0.53	0.62	0.56	0.51	0.59	0.53	0.49	0.44				
	2	0.84	0.75	0.68	0.81	0.73	0.66	0.61	0.69	0.63	0.58	0.65	0.60	0.56	0.51				
	2.5	0.87	0.79	0.73	0.84	0.77	0.71	0.66	0.73	0.68	0.63	0.69	0.64	0.61	0.55				
	3	0.89	0.83	0.77	0.87	0.80	0.75	0.70	0.76	0.71	0.67	0.71	0.68	0.64	0.59				
光源形式 CET403DE-C14A	4	0.93	0.87	0.82	0.90	0.85	0.80	0.76	0.80	0.76	0.73	0.76	0.72	0.69	0.64				
器具光束 3,520 lm	5	0.95	0.90	0.86	0.92	0.88	0.84	0.80	0.83	0.80	0.77	0.78	0.76	0.73	0.67				
	7	0.98	0.94	0.91	0.95	0.92	0.89	0.86	0.87	0.84	0.82	0.82	0.80	0.78	0.72				
	10	1.00	0.97	0.95	0.97	0.95	0.93	0.90	0.90	0.88	0.86	0.85	0.84	0.82	0.76				
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																	
上方光束 Fu= 13.2%																			
下方光束 Fd= 86.8%																			
最大取付間隔		<div>配光曲線 (cd/1000 lm)</div> 																	
A-A 1.30 H																			
B-B 1.26 H																			
保守率	良	0.86	<div>配光曲線 (cd/1000 lm)</div> 																
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div> 																	
	A-0															B-B	C-0	A'-0	C'-0
0	248															248	248	248	248
10	279	246	267	207	216														
20	308	231	281	160	179														
30	322	209	286	107	135														
40	327	179	278	66	91														
50	322	144	263	25	49														
60	308	107	238		14														
70	281	67	210																
80	243	26	173																
90	207	3	134																
100	157	3	89																
110	107	2	55																
120	69	1	26																
130	35	1	13																
140	17	1	7																
150	7	1	4																
160	4	1	2																
170	4	2	2																
180																			